MIL-D-38024B
27 August 1965
SUPERSEDING
MIL-D-38024A
24 September 1964

MILITARY SPECIFICATION

DROGUE, PARACHUTE STATIC LINE

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type of drag device used to achieve desired trailing characteristics of a static line.

* 2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

T-T-871 - Twine, cotton, wrapping
V-T-295 - Thread, nylon
UU-P-268 - Paper, Kraft, Untreated, Wrapping
PPP-B-636 - Box, Fiberboard

MILITARY

MIL-T-5038 - Tape and Webbing, Textile, Reinforcing, Nylon
MIL-C-5040 - Cord, Nylon
MIL-I-6903 - Ink, Marking (for Parachutes and Other Textile Items)
MIL-C-7219 - Cloth, Nylon, Duck, Plied Yarns, for Parachute packs
MIL-B-43291 - Boxes: Fiberboard; Corrugated, Double-Wall, Weather Resistant

STANDARDS

FEDERAL

Fed, Std. No. 751 - Stitches, Seams and Stitchings

FSC 1670

Source: https://assist.dla.mil -- Downloaded: 202610-21T11:50Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

DRAWING

AIR FORCE

61D2459 - Drogue, Parachute Static Line

(Copies of specificaitons, standards and drawings required by suppliers in connect ion with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

(Figure 1 is a miniature reproduction of referenced drawing is is attached for information only).

3. REQUIREMENTS

3.1 Preproduction sample. - Unless otherwise specified (see 6.2), prior to starting production, the supplier shall submit or make ready for the contracting officer or his duly authorized representative, one or more samples of the finished item for inspecting as specified in paragraph 4.2 of this specification. The preproduction sample shall be manufactured in the same facilities and by the production tools and methods to be used for manufacture of the production items. The approval of the preproduction sample authorizes the supplier to commence production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification.

3.2 Materials. - All materials shall be as specified on the drawing.

3.3 Design and construction. - The design and construction shall be in accordance with the drawing, specifications and standards listed in section 2, and as specified herein.

3.3.1 Machine stitching. - Thread breaks, skips and missing stitching shall be overstitched a minimum of 1 inch beyond ends of each defect, except for type 308 stitching which shall be overstitched two or three stitches. Runoffs shall be restitched to conform to the required stitch pattern. Backstitching is not required when ends of type 301 stitching are turned under in a hem or held down by other stitching. Thread tension shall be maintained so that there will be no loose stitching and the lock will be imbedded in the materials sewed. All thread ends shall be trimmed.

Source: https://assist.dla.mil -- Downloaded: 202610-21T11:50Z
Check the source to verify that this is the current version before use.

3.4 Workmanship. - The workmanship shall conform to the quality established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies conform to prescribed requirements.

4.2 Preproduction sample inspection. - When required, examination and testing examination and testing of the preproduction sample shall be made of a completely fabricated item for all provisions of this specification, applicable to end product examination and tests, except that acceptable quality levels and inspection levels do not apply.

4.3 Sampling for inspection and acceptance. - Samples shall be selected in accordance with the provisions of MIL-STD-105.

4.3.1 Component and material inspection. - In accordance with k, 1 above, components and materials shall be inspected and tested in accordance with all the requirements of of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.4 Inspection for acceptance. -

4.4.1 Inspection lot. - Lots shall be expressed in units of drogues.

4.4.2 Examination of end item. - The sample unit for this examination shall be one (1) drogue. The classification of defects, Inspection levels and acceptable quality levels (AQLs) shall be as set forth below.

4.4.2.1 Examination for visual characteristics. -

	Defect	Classification Major	Minor
Material	Wrong color		x
Design	Any characteristic not in accordance with specified requirement	x	
Construction and assembly	Any component missing, or not assembled or joined as specified	x	
Cleanness	Grease dirt, oil, oil, or other “foreign matter		x

Source: https://assist.dla.mil -- Downloaded: 2026l0-21T11:50Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Seams	Open seam	x	
	Open seam overstitched less than 1 inch		x
	NOTE: A seam shall be classified as open whenever breaks, runoffs, or two or more consecutive skips occur in stitching and are not over-stitched or restitched as specified.		
stitches and stitching	Not type of stitch specified	x	
	Ends of stitching not secured as specfied (except where turned under in a hem or held down by other stitching)		x
	One Stitch per inch less than minimum specified		x
	Two or more stitches per inch less than minimum specified	x	
	One or more stitches per inch in excess of maximum specified		x
	loose tension, resulting in loose top or bobbin thread; or tight tension resulting in tightness or puckering of material at switch line		x
	Thread ends not trimmed		x
	Any row of stitching missing	x	
	Needle Chews	x	
	Stitching pattern not complete	x	
	Stitch margin or gage not as specified		x
	Stitching run-off at edge cutting material	x	
Nylon cloth and tape	HoLes, tears, or cuts	X	
	Abrassion or thin material	X	
Nylon cord	Cut, tear or break	x	
	Abrasion, or seared area (except on ends of cord)	x	
	Any splice or not continuous		x
	Ends not seared		x
Identification marking	Missing, illegible, incorrect, wrong color, or location, or not applied as specified		x

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:50Z
Check the source to verify that this is the current version before use.

4.4.2.2 Dimensional examination. - Inspecion shall be made of the end item for compliance with dimensions and tolerances specified in the applicable specification or drawing. Any deviation therefrom shall constitute a defect.

4.4.2.3 Inspection levels and acceptable quality levels (AQLs) for examinations. - Inspection levels and acceptable quality levels (AQLs), expressed in defects per hundred units, shall be as follows:

	Inspection levels	AQLs
For examination in 4.4.2.1	II	2.5 Major 6.5 Total
For examination in 4.4.2.2	S-3	4.0 One class

4.4.3 Examination of preparation for delivery. - An examination shall be made to determine compliance with the packaging, packing and marking requirements specified in section 5 of this specification. Defects shall be scored as specified below. Shipping containers submitted for examination shall be fully prepared for delivery, with the exception that containers need not be sealed or closed. Examination shall be made in two phases; first an interior examination, and second, an examination of containers fully prepared for delivery. The sample. unit for each of the two phases shall be one container prepared for delivery as set forth above. The inspeciton level shall be S-2 and the acceptable quality level (AQL) shall be 6.5 defects per hundred units.

Examine	Defect
Marking (interim package and exterior container)	Omitted; incorrect; illegible; improper size, location, sequence or method of application.
Materials	Component missing, damaged, defective, or not as specified.
Workmanship	Inadequate application Or components such as improper taping of seams, comers and joints; (as applicable]; loose strapping or tape, inadequate stapling; bulging or distortion of containers.
Contents	Number per package or container not as specified.

5. PREPARATION DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202640-21T11:50Z
Check the source to verify that this is the current version before use.

5.1.1 Level A. - Each drogue shall be laid out flat. The vane and attached cord shall be folded on top of the body. The drogue shall then be folded in half along the length. Ten drogues, alternately reversed, shall be stacked to form a compact bundle and securely tied with twine conforming to type I or II, 8-ply of T-T-871. The bundle shall measure approximately 8-1/2 inches in length, 4-1/2 inches in width, and 3-3/4 inches in depth.

* 5.1.2 Level C. - Drogues shall be packaged to afford adequate protection against damage shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. - Packing shall be level A, B or C as specified (see 6.2).

* 5.2.1 Level A. - Seven hundred and fifty drogues, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, V3C or V3s of PPP-B-636. The inside of each PPP-B-636 shipping container shall be fitted with a taped liner conforming to type CF, class domestic, variety SW, grade 275, of PPP-B-636. Alternatively, shipping containers shall conform to style RSC, V13C of MIL-B-43291. Level A packages shall be packed flate, three in length, five in width, and five in depth within a shipping container. Inside dimensions of each shipping container shall approximate 25-1/2 inches in length, 22-1/2inches in width, and 18-3/4 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30 pound minimum basis weight kraft paper conforming to grade E of UU-P-268. Each container shall be waterproofed in accordance with the appendix of PPP-B-636. Each shipping container shall be closed and reinforced wihth flat steel strapping or tape banding in accordance k with the appendix of the applicable container specification.

5.22 Level B. - Seven hundred and fifty drogues, packaged as spedcified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type Cp or SP, class domestic, variety SW, grade 275 of PPP-B_636. The inside of each shipping container shall be fitted with a taped liner conforming to type CF, class somestic, vaiety SW, grade 275 of PPP-B-636. Level A packages shall be packed flat, three in length, five in width, and five in depth within a shipping container. Inside dimensions of each shipping container shall approximate 25-1/2 inches in length, 22-1/2 inches in width, and 18-3/4 inches in depth. Approximate dimesions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30 pound minimum basis weight draft paper conforming to grade B of UU-P-268. Each shipping container shall be closed method II in accordance with the appendix of the container specificaiton.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:50Z
Check the source to verify that this is the current version before use.

5.2.3 Level C. - Drogues, packaged as specified in 5.1, shall be packed in a reamer to carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 Marking. - In addition to any special marking required by the contract or order, intermediate packages and shipping containers shall be marked in accordance with MIL-STD-129. Each intermediate package shall have attached a manila colored paper shipping tag for the identification information,

6. NOTES

6.1 Intended use. - The drogue covered by this specification is intended for use as a stabilizing device to achieve desirable trailing characteristics of the static line to permit consecutive delivery of cargo and troops during airborne operations.

* 6.2 Ordering data. - Procurement documents should specify the following:

a. Title, number and date of this specificaiton.
b. Stock number.
c. Whether preproduction sample is required, and if required, number of samples (see 3.1).
d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 For access to standard shade samples, address the procuring office issuing the invitation for bids.

* 6.4 The margins of this specificaiton are marked with an asterisk to indicate swhere changes (additions, modifications, corrections, deletions) from the previous issure were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations, Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire control irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 202610-21T11:50Z
Check the source to verify that this is the current version before use.

Custodians:

Army-GL
Navy - MC
Air Force - 11

Preparing activity:

Army-GL

Reject No. 1670-0184

Review activities:


Army-MO
Air Force - 11, 67

User activities:

Army - MD
Navy - MC

Review and user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current Federal Supply Classification Listing of DOD Documents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:50Z
Check the source to verify that this is the current version before use.

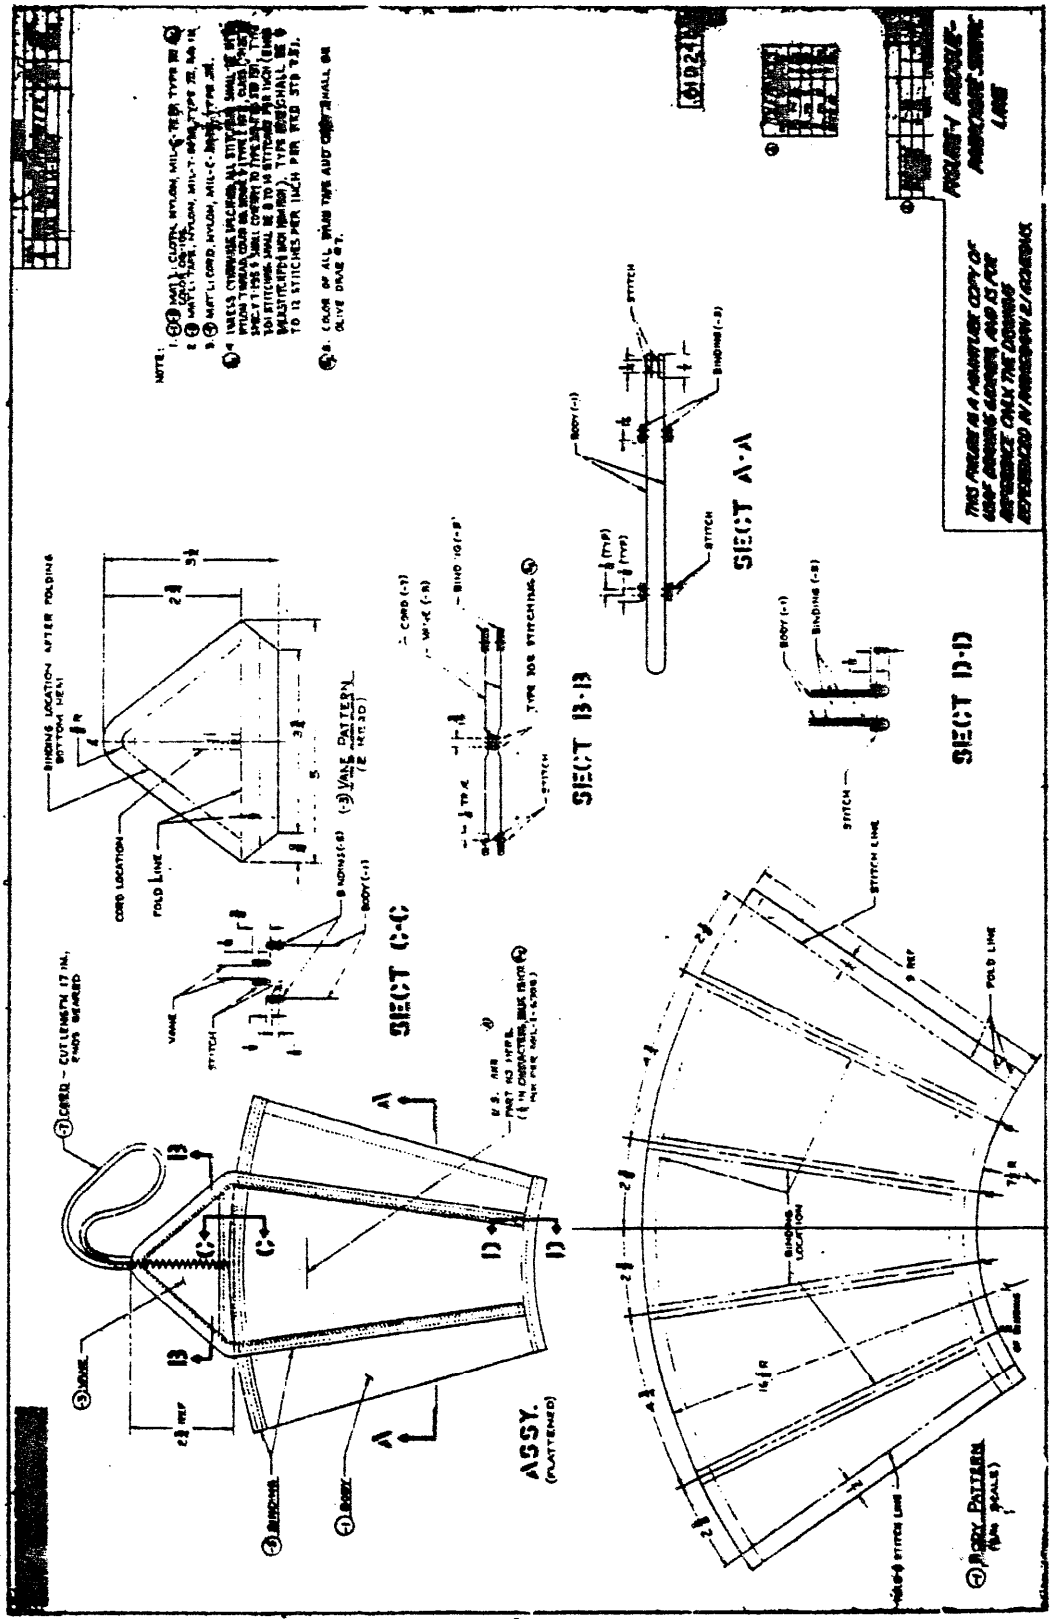

Source: https://assist.dla.mil -- Downloaded: 202610-21T11:50Z
Check the source to verify that this is the current version before use.

"to detach this form, cut along this line"

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

Drogue, Parachute Static Line - FSC 1670

ORGANIZATION	CITY AND STATE	
CONTRACT NO.	**QUANTITY OF ITEMS PROCURED**	**DOLLAR AMOUNT**
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 OCT 64 1426

Source: https://assist.dla.mil -- Downloaded: 202610-21T11:50Z
Check the source to verify that this is the current version before use.