MIL-T-38034E(USAF)
27 May 1970
SUPERSEDING
MIL-T-38034D(USAF)
20 May 1969

MILITARY SPECIFICATION

TIMER, FIRE CONTROL, BOMBING, DUAL

1. SCOPE

1.1 This specification covers the requirements for 28V d-c, integrally lighted, dual-channel, fire-control bombing timers.

1.2 Classification. Timers shall be of the following types, as specified (see 6.2):

Part No.	Lighting	Voltage
MS27264-5	MIL-L-25467	5V
MS27264-6	MIL-L-25467	28V
MS27264-7	MIL-L-27160	28V
MS27264-8	MIL-L-27160	5V
MS27264-9	MIL-L-25467	5V
MS27264-10	MIL-L-27160	5V

2. APPLICABLE DOCUMENTS

* 2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

QQ-P-416	Plating, Cadmium (Electrodeposited)
PPP-B-636	Box, Fiberboard

Military

MIL-P-116	Preservation, Method of
MIL-V-173	Varnish, Moisture- and Fungus-Resistant

FSC 6645

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:51Z
Check the source to verify that this is the current version before use.

MIL-E-5400	Electronic Equipment, Aircraft, General Specification for
MIL-S-7742	Screw Threads, Standard Optimum Selected Series: General Specification for
MIL-A-8625	Anodic Coatings, for Aluminum and Aluminum Alloys
MIL-C-14806	Coating, Reflection Reducing, for Instrument Cover Glasses and Lighting Wedges
MIL-L-25467	Lighting, Integral, Aircraft Instrument, General Specification for
MIL-L-27160	Lighting, Instrument, Integral, White, General Specification for

STANDARDS

Federal

FED-STD-595	Colors

Military

MIL-STD-100	Engineering Drawing Practices
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-143	Specifications and Standards, Order of Precedence for the Selection of
MIL-STD-461	Electromagnetic Interference Characteristics Requirements for Equipment
MIL-STD-462	Electromagnetic Interference Characteristics, Measurement of
MIL-STD-470	Maintainability Program Requirements (for Systems and Equipments)
MIL-STD-704	Electric Power, Aircraft, Characteristics and Utilization of
MIL-STD-785	Requirements for Reliability Program (for Systems and Equipments)
MIL-STD-794	Parts and Equipment, Procedures for Packaging and Packing of
MIL-STD-810	Environmental Test Methods
MIL-STD-831	Test Reports, Preparation of
MIL-STD-838	Lubrication of Military Equipment
MIL-STD-889	Dissimilar Metals
MIL-STD-1186	Cushioning, Anchoring, Bracing, Blocking, and Waterproofing, with Appropriate Test Methods
MS3311	Indicator, Elapsed Time, Electrochemical (Mercury) Indicating Cell)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:51Z
Check the source to verify that this is the current version before use.

MS27264	Timer, Fire Control, Bombing, Dual
MS90386	Indicator, Elapsed Time, Electrochemical (Mercury) 115 Volt AC or 28 Volt DC 50/2400 CPS

(Copies of documents required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Qualification. The timers furnished under this specification shall be products which are qualified for listing on the applicable qualified products list at the time set for opening of bids (see 4.4 and 6.4).

3.2 Selection of standards and specifications. Standards and specifications for necessary commodities and services not specified herein shall be selected in accordance with MIL-STD-143.

3.3 Materials

3.3.1 Fungus-proof materials. Materials that are nutrients for fungi shall not be used where it is practical to avoid them. Where used and not hermetically sealed, they shall be treated with a fungicidal agent acceptable to the procuring activity. However, if they will be used in a hermetically sealed inclosure, fungicidal treatment will not be necessary. Where applicable, varnish in accordance with MIL-V-173 shall be used.

3.3.2 Metals. Metals shall be of the corrosion-resistant type or suitably treated to resist corrosion due to atmospheric and climatic conditions to which the timer may be subjected during storage or normal service.

* 3.3.2.1 Dissimilar metals. Unless suitably protected against electrolytic corrosion, dissimilar metals shall not be used in intimate contact with each other. Dissimilar metals are defined in MIL-STD-889.

3.3.3 Nonmagnetic materials. Nonmagnetic materials shall be used for all parts of the timer except where magnetic materials are essential.

3.3.4 Nonferrous materials. Nonferrous materials shall be used for all parts of the timer except where ferrous materials are essential.

3.3.5 Toxic and corrosive fumes. Materials used in the construction of the timer shall not liberate gases which combine with the atmosphere to form acid or corrosive alkali nor liberate toxic fumes when burned.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:51Z
Check the source to verify that this is the current version before use.

3.3.6 Protective treatment. When materials are used in the construction of the timer that are subject to deterioration when exposed to climatic and environmental conditions likely to occur during service usage, they shall be protected against such deterioration in a manner that will in no way prevent compliance with the requirements of this specification. The use of any protective coating that will crack, chip, or scale with age or extremes of climatic and environmental conditions shall be avoided.

3.4 Design and construction

3.4.1 Presentation. The timer shall provide two independent timer signals, one for pullup and one for release, at two preset time-delay intervals. The timer settings for each function shall be accomplished by rotating the set knobs on the lower face of the unit. The digital counter shall indicate in seconds the value of the input setting for each function. Each digital counter shall display three figures which may be set at each 0.1-second increment. The counters shall be maintained at the selected positions by a positive detent mechanism. The numerals shall not count off during timer operation.

3.4.1.1 Function. The timer shall be energized by the actuation of an externally located OFF-ON power switch that will apply a 28V d-c signal to the timer. The timing cycle shall be engaged when the START switch is actuated. The START switch, which shall also be located externally to the timer, shall apply a 28V START signal to the timer. Both signals must be obtained to initiate the timing cycle.

3.4.1.1.1 Sequence. After the desired timing period has been set for both the pullup and release functions and both the POWER and START switches are actuated, the timing cycle shall begin functioning immediately. Upon completion of the pullup phase of the timing cycle, a PULLUP signal output shall be generated and the release timer shall simultaneously begin to cycle. Upon completion of the release phase of the timing cycle, a RELEASE signal output shall be generated. Both PULLUP and RELEASE signals shall continue until the POWER or START signal is removed. When either the START or POWER signal is removed, the timer shall begin to automatically reset only after a 0.1-second interval has elapsed. The timer shall then reset in less than 5 seconds to the original input conditions. Under no circumstances shall the timers energize the pullup or release circuits unless both the POWER and START switches are actuated and both the timer circuits have completed their respective time cycles.

3.4.1.1.2 Pullup signal operation. The timer circuitry shall be such that it will produce a PULLUP signal only by setting the release counter (see MS27264) to 0.0 and the pullup counter to some value other than zero. Operation of the timer through an otherwise normal operational sequence, as outlined herein, shall produce only the PULLUP signal. Under no circumstances shall it be possible for a RELEASE signal to be produced when the release counter is set on 0.0.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:51Z
Check the source to verify that this is the current version before use.

3.4.1.1.3 Release signal operation. The timer circuitry shall be such that it will produce a RELEASE signal only by setting the pullup timer to 0.0, and the release timer to a value other than zero. Operation of the timer through an otherwise normal operational sequence shall produce only the RELEASE signal.

* 3.4.1.1.4 Automatic shutoff. The timer mechanism shall automatically shut off within 1 ±0.1 minute after the RELEASE signal is produced, even though the START switch remains in the ON position and the 28V d-c power is continuously applied to terminal E of the timer. The timer mechanism shall remain off until the START signal is reactuated, at which time the timer mechanism shall again be energized provided the power continues to be applied to terminal E. Interruption of the input signal at either terminal E or terminal K will, after a 0.1-second delay, de-energize the timer circuitry and reset the mechanism to the original input condition.


3.4.1.1.5 Power interruption. If the input power to the timer should be momentarily interrupted, the timer shall begin to automatically reset only after a 0.1-second interval has elapsed from the time of the interruption. The timer shall then reset to the original input conditions in less than 5 seconds.

3.4.1.1.6 Voltage divider (MS27264-9 and -10 only). The timer shall contain a voltage divider which will provide a voltage ratio from 0.0 to 1.0 corresponding to the release-time setting of 0.0 to 30.0 seconds. The voltage divider shall have an impedance of 10,400 ±500 ohms resistive, with a quadrature voltage of less than 0.35 mv/V at 400 Hz with respect to the excitation voltage.

3.4.2 Time setting. The timer shall be provided with two setting knobs as shown on figure 1 and MS27264 for setting the respective pullup and release digital counters. The settings shall be in increments of 0.1 second. The torque required to rotate the setting knobs to change the settings shall be 12 ±3 ounce-inches. A slip clutch shall be incorporated between the setting knobs and the digital counters to prevent overstressing and timer damage. The outer periphery of the setting knobs shall be knurled and the setting knob shafts shall be sealed to prevent moisture from leaking into the timer.


3.4.2.1 Knob revolutions. Twelve revolutions of the setting knob shall be required to set the pullup counter from 0.0 to 60.0 seconds and 6 revolutions of the setting knob shall be required to set the release counter from 0.0 to 30.0 seconds. Both of the setting knobs shall rotate clockwise for increasing time increments when viewed from the front of the timer. For the MS27264-9 and -10 timers, the number of release counter setting knob revolutions required to move the release counter from 00.0 to 30.0 seconds shall be 9 ±0.05.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:51Z
Check the source to verify that this is the current version before use.

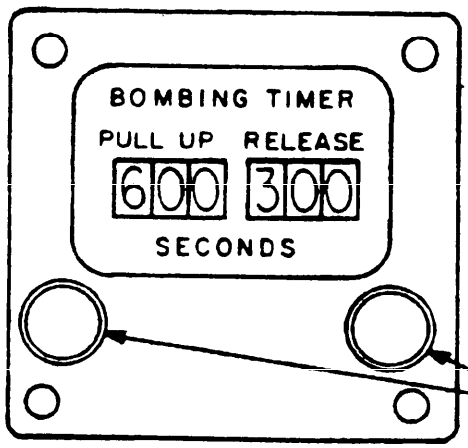

TIMER DISPLAY

NOTE: THE DISPLAY MARKINGS SHALL BE WHITE, COLOR NO. 37875 OF FED-STD-595. THE EXTERIOR OF THE TIMER AND THE SET KNOBS SHALL BE FINISHED IN DURABLE DULL BLACK, COLOR NO. 37038 OF FED-STD-595. BLACK ANODIZED COATING MAY BE USED WHEN THE MATERIAL IS ALUMINUM SEE MS 27264 FOR DETAILED DIMENSIONS

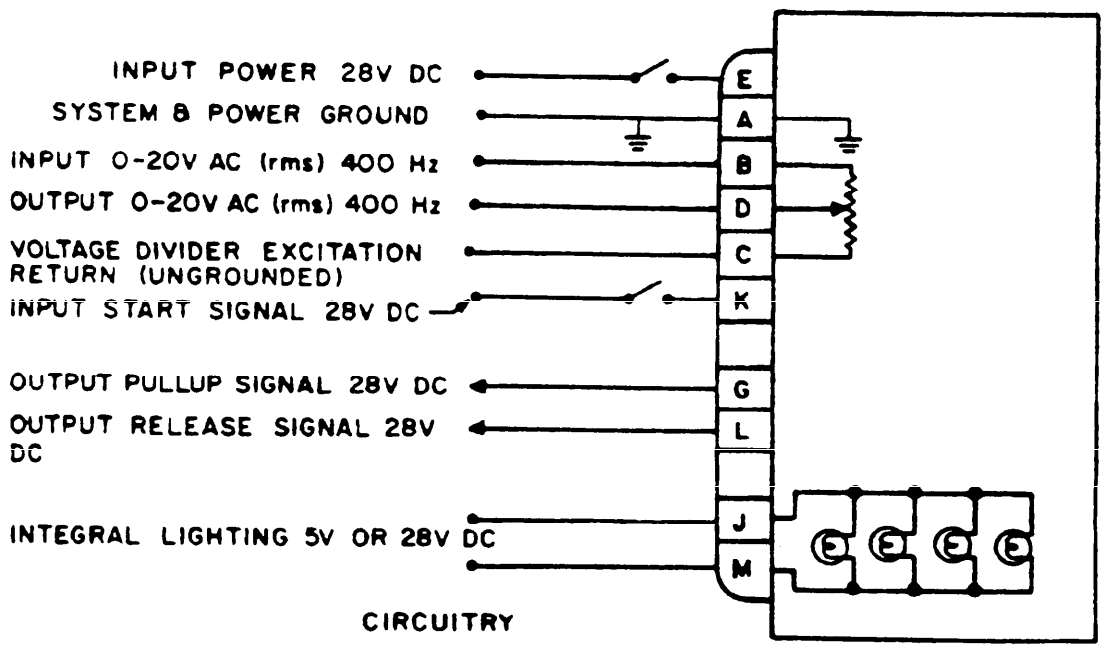

CIRCUITRY

FIGURE 1. Circuitry and Timer Display

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:51Z
Check the source to verify that this is the current version before use.

3.4.3 Timing range. The ranges of the timer mechanism shall be as follows:

a. Pullup circuit — from 0.0 to 60.0 seconds in 0.1-second increments. Stops shall be provided so that this timing circuit cannot be set below 0.0 or above 60.0 seconds.

b. Release circuit — from 0.0 to 30.0 seconds in 0.1-second increments. Stops shall be provided so that this timing circuit cannot be set below 0.0 or above 30.0 seconds

3.4.3.1 Accuracy. After a 20-second warmup period, the timer shall maintain an accuracy of ±0.05 second for each channel and an overall dual channel accuracy of 0.075 second throughout the performance envelope specified herein. The timer scale error, including the test error tolerances, shall be within the tolerances specified in table I. These tolerances shall be applicable to all timer settings at 0.2 second and above.

3.4.3.1.1 Accuracy (MS27264-9 and -10 only). After a 20-second warmup period, the timer shall maintain an accuracy of ±0.050 second for each channel and an overall dual channel accuracy of ±0.075 second throughout the performance envelope specified herein. The voltage divider system shall maintain an accuracy of ±0.2 percent of the voltage ratio throughout the operational range. The voltage accuracy shall be in accordance with table II. The allowable error of the release channel and voltage divider system may be considered in combination and redistributed, if necessary, in different proportions than indicated above. The combined total allowable error may be expressed as:

$$\pm\left(\frac{5}{\text{Release Channel Setting}} + 0.2\right) \text{ Percent}$$

3.4.3.2 Calibration adjustment. The timer may incorporate a calibration adjustment on the rear of the case. Calibration shall be maintained within the accuracy tolerance specified herein for a period of 2,500 hours of operation.

* 3.4.4 External circuitry. The timer shall be designed to operate with external electrical circuitry (see figure 1) as follows:

a. Nominal 28V d-c excitation power fed to pin E through an external control switch

b. START signal, nominal 28V dc fed to pin K through an external START switch

c. Common power and system ground, pin A

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:51Z
Check the source to verify that this is the current version before use.

TABLE I. Scale Error

Pullup (Seconds)	Release (Seconds)	Scale Error Tolerance (± Milliseconds)
* 5	0	50
*10	0	50
15	0	50
*20	0	50
25	0	50
*30	0	50
40	0	50
50	0	50
60	0	50
45	0	50
*35	0	50
22	0	50
17	0	50
*13	0	50
0	* 2	50
0	* 5	50
0	*10	50
0	*15	50
0	*20	50
0	25	50
0	*30	50
0	27	50
0	22	50
0	17	50
0	*13	50
0	8	50
0	4	50
* 2	* 2	75
* 5	* 5	75
*10	* 7	75
*15	*10	75
20	15	75
30	20	75
*60	30	75

* Abbreviated test schedule.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:51Z
Check the source to verify that this is the current version before use.

* TABLE II. Scale Error Voltage Divider
(Applicable to MS27264-9 and MS27264-10 Timers only)

RELEASE (SECONDS)	VOLTAGE RATIO
0.0	0.0000
0.2	0.0066
0.5	0.0167
1.0	0.0333
2.0	0.0667
5.0	0.1667
10.0	0.3333
15.0	0.5000
20.0	0.6667
25.0	0.8333
30.0	1.0000
27.0	0.9000
22.0	0.7333
17.0	0.5667
13.0	0.4333
8.0	0.2667
4.0	0.1333
7.0	0.2333

NOTE: Voltage ratio shall be checked at 6V ac for all tests and also at 10, 15, and 20V ac for qualification tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:51Z
Check the source to verify that this is the current version before use.

d. PULLUP output signal from timer, pin G

e. RELEASE output signal from timer, pin L

f. Power for output signals from pins G and L to originate from pin K

g. Lighting power input supply (5 or 28V nominal, as applicable) to be fed into pins J and M

h. Voltage divider input excitation voltage, pin B (MS27264-9 and MS27264-10 timers only)

i. Voltage divider output signal, pin D (MS27264-9 and MS27264-10 timers only)

j. Voltage divider excitation return, pin C (applicable to MS27264-9 and MS27264-10 timers only).

3.4.5 Operating voltage. Except for the 5V a-c lighting circuit and voltage divider, the timer shall be designed to operate from aircraft electrical power systems having characteristics in accordance with MIL-STD-704. The accuracy specified herein shall apply for all power input voltages from 25.0 to 29.0V dc.

3.4.5.1 Current ratings. The current ratings of the various timer components shall be as follows:

a. Timer mechanism — not to exceed 0.17 amp

b. Clutch — not to exceed 0.17 amp for each operation

c. Switches and relays — shall be capable of handling at least 1.5 amp inductive load at 28V dc

d. The timer, with both functions operating on rated power, shall not draw more than 600 milliamps with the bulbs unlit.

Note: In a solid-state design, the total of a and b shall not exceed 0.34 amp.

3.4.5.2 Output voltage tolerance. The output signal voltage from pins G and L of the timer connector shall be within 1 percent of the input voltage under loads up to 1.5 amp.

3.4.6 Lighting. Integral lighting shall be in accordance with MIL-L-25467 or MIL-L-27160 as defined by the applicable part number shown on MS27264 (see 1.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:51Z
Check the source to verify that this is the current version before use.

3.4.6.1 MS27264-6 deviations. Timers that require a 28V lighting system in accordance with MIL-L-25467 shall deviate from those requirements as follows:

a. The lamp circuitry within the timer shall contain a resistor that will drop the voltage across the lamps to 26.0 ±0.1V when 28.0V are applied to the lighting terminals of the timer connector

b. The requirements of MIL-L-25467 shall apply when 28V (in lieu of 5V) are applied to the lighting terminals of the timer connector.

3.4.6.2 MS27264-7 deviations. Timers that require a 28V lighting system in accordance with MIL-L-27160 shall deviate from those requirements as follows:

a. The lamp circuitry within the timer shall contain a resistor that will drop the voltage across the lamps to 26.0 ±0.1V when 28.0V are applied to the lighting terminals of the timer connector

b. The requirements of MIL-L-27160 shall apply when 28V (in lieu of 4.5V) are applied to the lighting terminals of the timer connector.

3.6.4.3 Prime standard. The prime standard shall be prepared as follows: A minimum of 20 areas, covering the entire face of the timer, shall be measured for brightness, color, and stray light as specified in the applicable lighting specification. The prime standard shall be approved by the procuring activity.

3.4.7 Reliability program. The contractor shall establish a reliability assurance program in accordance with MIL-STD-785.

3.4.7.1 Reliability. The timer shall be designed to demonstrate a minimum acceptable mean-time-between-failures (MTBF) of 1,000 hours at a 90 percent confidence level.

3.4.7.2 Longevity. The timer shall have an operating life span (equipment longevity) of not less than 2,500 hours before wearout failures occur or the equipment consistently fails to meet the specified MTBF index. Parts requiring replacement within this period of time and the normal operating period of such parts shall be reported by the contractor to the procuring activity. Life requirements of lamps shall be in accordance with applicable specifications approved by the procuring activity.

* 3.4.8 Maintainability. The timer shall be so constructed that adjustments and repairs can be easily made by personnel of overhaul bases without the use of special tools. Maintainability shall be in accordance with MIL-STD-470.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:51Z
Check the source to verify that this is the current version before use.

3.4.9 Dial to cover glass distance. The distance between the digital counters and the inside of the cover glass shall not exceed 0.125 inch.

3.4.10 Readability. When viewed from any direction with the timer at eye level or lower, the counter numerals shall be clearly readable within a 45° angle from a line perpendicular to the timer face in between the counter openings. No light leakage shall be observed within this cone.

3.4.11 Nonstandard parts. Nonstandard parts and the application thereof shall conform to MIL-E-5400. Nonstandard parts shall be approved by the procuring activity prior to fabrication of production items.

3.4.12 Elapsed time indicator. Each timer shall include one electrochemical elapsed time indicator conforming to MS3311-1 or MS90386-4. It shall be electrically connected to the timer circuitry and shall be energized when power is applied to the timer. The elapsed time indicator shall be so located that it will be easily readable when the timer cover is removed.

* 3.5 Performance. The timer shall operate satisfactorily and shall meet the requirements specified herein when subjected to the following conditions:

a. Temperature - Temperatures ranging from -54° to +71°C

b. Vibration - Vibration at frequencies between 5 and 500 Hz and at applied double amplitudes ranging up to 0.1 inch maximum

c. Humidity - Relative humidity up to 95 percent

d. Acceleration - Acceleration ranging between +13 and -5g in the vertical and horizontal axes and 5g along the other orthogonal axis

e. Fungus - Exposure to fungus for 28 days as encountered in tropical climates

f. Shock - Exposure to 18 shocks of 50g for 8.5-milliseconds duration in both directions along each of 3 mutually perpendicular axes

g. Dust - Exposure to sand and dust as encountered in desert areas

h. Salt fog - Exposure to salt fog for 48 hours

i. Altitude - Altitudes ranging from sea level to 65,000 feet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:51Z
Check the source to verify that this is the current version before use.

* 3.5.1 Dielectric strength. The timer shall withstand a potential of 300V rms commercial frequency for a period of 1 minute applied between the connector pins and the case and between any connector pins that are isolated, circuitry wise, from any other pins of the connector.

* 3.5.2 Electromagnetic interference. The timer shall meet the electromagnetic interference requirements of MIL-STD-461, equipment class ID. The test shall be conducted with the following loads applied to both the pullup and release output channels. The four loads shall be connected in parallel.

a. Three Leach relays, model 9230-3553, or equivalent, each with a coil resistance of 148 ohms ±10 percent and a coil inductance of 3.4H

b. One GE 327 lamp, or equivalent.

3.5.3 Operating position. The timer shall be capable of operating in any position.

3.5.4 Explosive decompression. The timer shall meet the performance requirements specified herein immediately after the unit has been subjected to condition I of the explosive decompression test in accordance with 4.6.18. It shall not deform nor disintegrate in a manner that could cause injury to a crew member or otherwise jeopardize aircraft safety when subjected to condition II of 4.6.18.

3.5.5 Magnetic effect. The timer, operating or nonoperating, shall not create a magnetic field with such intensity as to deflect a short bar magnetic compass more than 2°.

3.6 Part numbering of interchangeable parts. All parts having the same manufacturer's part number shall be functionally and dimensionally interchangeable. The item identification and part number requirements of MIL-STD-100 shall govern the manufacturer's part numbers and changes thereto.

3.7 Cover glass. The cover glass over the timer shall be clear and free from flaws that would interfere with normal reading of the timer. The glass shall be secured in place and shall be leakproof.

3.8 Connector. The connector shall be either Bendix part No. PT07H-14-12P or PTIH-14-12P, or equivalent.

* 3.9 Lubrication. During assembly, the components shall be lubricated in accordance with MIL-STD-838 and shall require no additional lubrication throughout their normal service life. Lubrication of the components shall not be affected by the operating position of the timer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:51Z
Check the source to verify that this is the current version before use.

* 3.10 Antireflection coating. All reflecting glass surfaces shall be provided with a reflection-reducing coating conforming to MIL-C-14806 which shall withstand the environmental condition specified herein.

3.11 Weight. The weight of the timer shall not exceed 2.7 pounds.

3.12 Dimensions and tolerances. Dimensions and tolerances not specified shall be as close as in consistent with the best shop practices. Where dimensions and tolerances may affect the interchangeability, operation, or performance of the timer, they shall be held or limited accordingly.

3.13 Screw threads. Unless otherwise specified, the threads of all machine screws shall conform to MIL-S-7742.

3.14 Finishes and protective coatings

3.14.1 Exterior. Unless otherwise specified, the exterior of the timer shall be finished in durable dull black, color No. 37038 of FED-STD-595. When aluminum is used, it may be finished with a black anodized coating.

3.14.2 Plating. Plating shall not be required on normally lubricated parts, such as gears, bearings, and shafts (fabricated from brass), bronze, or corrosion-resistant steel.

3.14.3 Cadmium-plated parts. Cadmium-plated parts shall be in accordance with QQ-P-416, of a type and class necessary for the protection required.

3.14.4 Aluminum alloy parts. Aluminum alloy parts shall be covered with an anodic film in accordance with MIL-A-8625, except that small holes, straight threads, and case inserts need not be anodized.

3.15 Identification of product. Equipment, assemblies, and parts shall be marked for identification in accordance with MIL-STD-130.

3.15.1 Schematic. An electrical schematic showing the function of each connector pin shall be permanently attached to the body of the timer.

3.16 Workmanship. The timer, including all parts and accessories, shall be fabricated and finished in a thoroughly workmanlike manner. Particular attention shall be given to freedom from blemishes, defects, burrs, and sharp edges, accuracy of dimensions, radii of fillets, and marking of parts and assemblies, choroughness of soldering, welding, brazing, painting, wiring, and riveting, alignment of parts, and tightness of assembly screws and bolts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:51Z
Check the source to verify that this is the current version before use.

3.16.1 Gears. Gear assemblies shall be properly aligned and meshed and shall be operable without interference, tight spots, loose spots, or other irregularities. Where required for accurate adjustments, gear assemblies shall be free from backlash.

3.16.2 Cleaning. After final assembly, the timer shall be thoroughly cleaned and loose, spattered, or excess solder, metal chips, resin flash that may crumble, and other foreign materials shall be removed.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of tests. The inspection and testing of timers shall be classified as follows:

a. Qualification tests

b. Quality conformance tests.

4.3 Test conditions

4.3.1 Standard atmospheric conditions. Whenever the pressure and temperature existing at the time of the test are not specified definitely, it is understood that the test is to be made at atmospheric pressure (approximately 29.92 inches Hg) and at room temperature (approximately 25°C). When tests are made with atmospheric pressure or room temperature differing materially from the above values, proper allowance shall be made for the difference from the specified condition.

4.3.2 Attitude. Unless otherwise specified, the timer shall be tested in such a position that the lighting plate in the face of the timer will be vertical.

4.3.3 Timer test voltage. Unless otherwise specified, the timer shall be tested with a 28V d-c power supply, except for the lighting circuit which shall be tested with a nominal 5 or 28V supply, varied as required to perform the tests specified in MIL-L-25467 or MIL-L-27160, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:51Z
Check the source to verify that this is the current version before use.

4.3.3.1 Voltage divider test voltage. The excitation voltage shall be between 0 and 20V ac rms, which shall be varied as required to perform the tests specified herein, and the frequency shall be 400 Hz. The voltage tolerance at any specified level shall be ±0.1V ac rms and the frequency tolerance shall be ±5 Hz.

4.3.4 Vibration. Unless otherwise specified, the timer shall not be subjected to any form of vibration or tapping during the performance of the tests specified herein.

4.3.5 Test sequence. All tests shall be run in the order specified herein.

4.4 Qualification testing

* 4.4.1 Test samples. The test samples shall consist of at least 12 timers representative of the production equipment. Six of the samples shall be subjected to all the tests except reliability and longevity and the other six samples shall be subjected to the reliability and longevity tests only. The samples shall be identified with the manufacturer's part number and such information as required by the letter of authorization. The contractor shall submit to the qualifying activity all test samples upon which qualification tests have been performed.

4.4.2 Test report. The contractor shall prepare a test report in accordance with MIL-STD-831 (see 6.2.1).

4.4.3 Qualification tests. The qualification tests shall consist of all the tests specified under 4.6.

4.5 Quality conformance tests. Quality conformance tests shall consist of:

a. Individual tests

b. Sampling tests.

4.5.1 Individual tests. Each timer shall be subjected to the following tests as described under 4.6:

a. Examination of product

b. Operational checks.

Source: https://assist.dla.mil -- Downloaded: 20261O-21T11:51Z
Check the source to verify that this is the current version before use.

4.5.2 Sampling tests. Two timers shall be selected at random from each 100 or less produced on the contract or order and subjected to the following tests as described under 4.6:

a. Individual tests

b. High temperature

c. Low temperature

d. Vibration error

e. Voltage variation

f. Integral lighting

g. High speed knob twist.

4.5.2.1 Rejection and retest. When one item selected from a production run fails to meet the specification, no items still on hand or later produced shall be accepted until the extent and cause of failure are determined. After corrections have been made, all necessary tests shall be repeated.

4.5.2.2.1 Individual tests may continue. For operational and production reasons, individual tests may be continued pending the investigation of a sampling test failure. But final acceptance of items on hand or later produced shall not be made until it is determined that items meet all the requirements of the specification.

4.5.3 Defects in items already accepted. The investigation of a test failure could indicate that defects may exist in items already accepted. If so, the contractor shall fully advise the procuring activity of all defects likely to be found and methods of correcting them.

4.6 Test methods

4.6.1 Examination of product. The timer shall be inspected to determine compliance with the requirements specified herein with respect to materials, workmanship, marking, and general conformance to MS27264.

4.6.2 Operational checks

4.6.2.1 Mechanical operation. The timer shall be checked for mechanical operation by manipulating the setting knobs sufficiently to operate the indicator readout from the lower to the upper stop. Travel below or above the

Source: https://assist.dla.mil -- Downloaded: 202610-21T11:51Z
Check the source to verify that this is the current version before use.

specified stop locations shall not be sufficient to allow the timer indicator readout to detent on any timer setting below or above the specified limits (0.0 and 60.0 on the pullup indicator and 0.0 and 30.0 on the release indicator). Detent action shall be observed during this manipulation to insure that the digits of the indicators stop in satisfactory readable alignment of each detent. The setting knobs shall be driven against the stops for three full turns of the knob at both ends of the scale to determine that the slip clutch operates properly.

* 4.6.2.2 Electrical operation. The timer shall be connected to a 28V d-c power supply making sure that both the POWER and START switches are open initially. The initial timing check shall be made by setting in the maximum readout on both indicators (60.0 seconds, pullup and 30.0 seconds, release). The timer warmup shall also be checked on the first run as follows: The EXCITATION power switch shall be turned on and within 20 seconds later, the START switch shall be turned on to start the timer in operation. The time which elapses between the closing of the START switch and the initiation of the PULLUP and RELEASE signals shall be measured and recorded. A similar run shall be made using half-scale settings on the timer indicators. Similarly, a third set of readings shall be taken using 0.2 second as the timer readout on both indicators. At no time shall the actual PULLUP signal timing differ from the indicator setting by more than $\pm$0.05 second, nor shall the actual RELEASE signal timing differ from the time set into the release indicator by more than $\pm$0.05 second at any time. When both the pullup and release functions operate sequentially, the maximum combined error shall not exceed 0.075 second. The timing procedure for the three sets of readings shall be repeated except that the input power signal shall first be interrupted for 100 +0 -5 milliseconds midway through the pullup timing cycle, and the cycle shall then be rerun with the interruption occurring midway through the release cycle. The third set of readings shall be taken with 5 seconds readout on both channels. The specified tolerances shall apply. At the end of this test and the test specified in 4.6.2.1, the timer shall be checked for compliance with the automatic shutoff requirement.

* 4.6.2.2.1 Voltage drop. Separate 1.5-amp loads shall be connected across pins G and A (pullup load) and across pins L and A (release load). The timer shall then be caused to produce PULLUP and RELEASE signals. The voltage across pins L and A and across pins G and A shall be measured. Each voltage shall be within 1 percent of the input voltages across pins K and A.

4.6.2.2.2 Scale error. The timer shall be connected to the test equipment with loads applied to both the pullup and release output channels specified in 3.5.2. The timing intervals shall then be set into the timer for each set of

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:51Z
Check the source to verify that this is the current version before use.

test points listed in table I; the time-out signals shall be within the tolerances specified therein. The time which elapses between the closing of the START switch and the initiation of the PULLUP and RELEASE signals shall be measured with the equipment having an accuracy of at least one order of magnitude greater than the accuracy specified in table I. The accuracies listed in table I include the test tolerances.

4.6.2.2.3 Scale error voltage divider (MS27264-9 and -10 only). The timer shall be connected to the test equipment as specified in 4.6.2.2.2 and the voltage divider shall be connected to the test equipment with a 100,000 ±100-ohm load across pins D and C. The voltage ratio shall be within the tolerances specified in 3.4.3.1.1 for the settings shown in table II.

4.6.2.3 Setting knob torque. The amount of torque required to turn the setting knobs shall be measured and shall be 12 ±3 ounce-inches.

4.6.2.4 Setting knob operation. A 0.0-second reading shall be set on both the pullup and release counters. The setting knobs shall then be rotated so that both counters are at full scale (60.0 seconds for pullup and 30.0 seconds for release). The action of the setting knobs shall be observed for compliance with the following:

a. Rotation of the setting knobs in a clockwise direction when viewed from the front which shall produce an increase in the timing interval on the digital counters

b. Increasing or decreasing of the counter setting by 0.1 second for each detent

c. Twelve turns to move the pullup counter setting from 0.0 second to 60.0 seconds and 6 turns to move the release counter setting from 0.0 second to 30.0 seconds. For MS27264-9 and -10 timers, 9 ±0.5 setting-knob revolutions to move the release counter setting from 00.0 to 30.0 seconds.

d. Slip clutch action between setting knobs and the counter mechanisms when attempting to set beyond the upper and lower indicator limits (0.0 to 60.0 and 0.0 to 30.0 seconds for the pullup and release counters, respectively).

4.6.2.5 Quadrature voltage test (MS27264-9 and -10 only). The voltage divider shall be checked over its entire range for the output-signal voltage component 90° out of time phase with the voltage divider excitation voltage. The output-signal voltage component shall not exceed 0.35 mv/V.

Source: https://assist.dla.mil -- Downloaded: 202640-21T11:51Z
Check the source to verify that this is the currentversion before use.

4.6.2.6 Voltage divider resistance test (MS27264-9 and -10 only). With pin D (wiper) open, the resistance between pins B and C shall be checked and shall be 10,400 ±500 ohms.

4.6.2.7 Visual lighting check. Production timers shall be checked by comparison with the prime standard specified in 3.4.6.3. The prime standard and the instrument under test shall be placed side by side at eye level. Both units shall be connected to a common variable source (0-5V or 0-28V), as applicable. With 2.85 ±0.1V or 13.0 ±0.2V, as applicable, applied to both units, the brightness of the two units shall be compared. If the brightness lighting of the two units appears the same visually, the unit under test shall be considered acceptable. If any area of the instrument under test appears visually to differ from the same area of the prime standard, it shall then be subjected to all display tests listed in MIL-L-25467 or MIL-L-27160, as applicable, and sufficient data taken to substantiate conformance or nonconformance to the display requirements therein.

4.6.2.7.1 Visual color check. A voltage of 5.0V or 28.0V, as applicable, shall be applied to the prime standard and the timer being tested. The two units shall be compared and shall visually appear identical in color. If the color of the two units appears the same visually, the unit under test shall be considered acceptable. If any area of the unit under test appears visually to differ from the same area of the prime standard, the unit shall be subjected to the color tests specified in MIL-L-25467 or MIL-L-27160, as applicable, and sufficient data taken to substantiate conformance or nonconformance to the color requirements therein.

4.6.3 High temperature. The timer shall be subjected to a high temperature test in accordance with method 501 of MIL-STD-810, procedure I. Near the end of the test, the timer shall be subjected to 10 cycles of operation at both midscale and full-scale settings. The tolerances shall not exceed those specified in 3.4.3.1. Upon completion of this test, the timer shall meet the test specified in 4.6.2.2.2.

4.6.4 Low temperature. The timer shall be subjected to a low temperature test in accordance with method 502 of MIL-STD-810. The test shall consist of 10 cycles of operation at both midscale and full-scale timer settings at the -54°C temperature. Tolerances shall not exceed those specified in 3.4.3.1. Upon completion of this test, the timer shall meet the test specified in 4.6.2.2.2.

4.6.5 Vibration error. The timer shall be subjected to a vibration error test in accordance with MIL-STD-810, method 514 equipment category (b) curve D, as specified in the vibration test selection chart, except that for MS27264-9 and -10 timers, the g-level shall not exceed 2g. This test shall be conducted

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:51Z
Check the source to verify that this is the current version before use.

while the timer is being subjected to 10 cycles of operation at midscale and full-scale settings. Tolerances shall not exceed those specified in 3.4.3.1 and 3.4.3.1.1, as applicable. Upon completion of this test, the timer shall meet the tests specified in 4.6.2.2.2 and 4.6.2.2.3, as applicable.

4.6.6 Voltage variation. The timer shall be connected to a nominal 28V d-c power source and subjected to the test specified in 4.6.2.2, first with 25.0V d-c input to the timer and then with a 29.0V input. The timing accuracies specified therein shall apply.

4.6.7 Integral lighting. Lighting tests shall be conducted on all test units in accordance with the applicable lighting specification and as specified in 3.4.6 through 3.4.6.2, as applicable. Lighting acceptability of production timers shall be based on visual comparison with the prime standard.

4.6.8 High speed knob twist. The setting knobs shall be rotated through an arc of at least 0° to 180° but not more than 270° and shall attain a minimum speed of 1150 rpm upon reaching the 180° position. Each knob twist shall be performed at a different counter-wheel setting and shall include both one and two counter-wheel operations. The counters shall respond properly to the knob twists. If necessary, the clutches may be adjusted for this test.

4.6.9 Vibration failure. The timer shall be subjected to a vibration failure test in accordance with MIL-STD-810, method 514 equipment category (b), curve D, as specified in the vibration test selection chart, except that for MS27264-9 and -10 timers, the g-level shall not exceed 2g. At the conclusion of this test, the timer shall be subjected to 10 cycles of operation at midscale and full-scale settings. The tolerances shall not exceed those specified in 3.4.3.1 and 3.4.3.1.1, as applicable. Upon completion of this test, the timer shall meet the tests specified in 4.6.2.2.2 and 4.6.2.2.3, as applicable.

4.6.10 Magnetic effect. The timer, not operating, shall be rotated in a vertical plane about a short-bar magnetic compass with the nearest part of the timer 5-1/2 inches from the center of the compass. The vertical plane shall be oriented east-west through the center of the compass, and the face of the timer shall remain in this plane. Starting directly under the compass, the timer shall be held in positions 0°, 45°, 90°, 135°, 180°, 225°, 270°, and 315° from the initial position. At each of these positions, the timer shall be rotated on its own horizontal axis until it is in the normal upright position. The horizontal magnetic field intensity shall be 0.17 to 0.19 oersted. The deflection of the compass at any of the specified positions shall not exceed 2°. This test shall be repeated with the timer operating at rated voltage.

Source: https://assist.dla.mil -- Downloaded: 202610-21T11:51Z
Check the source to verify that this is the current version before use.

4.6.11 Electromagnetic interference. The timer shall meet the electromagnetic tests specified in MIL-STD-462 for class ID equipment.

* 4.6.12 Power interruption. The timer shall be subjected to a scale error test as specified in 4.6.2.2.2 at room temperature. At each timer setting, the input power signal shall be momentarily interrupted midway through the timing cycle. The signal interruption time shall be varied between test points, and shall include, but not exceed, 100 milliseconds. For dual channel operation, the timer shall be run twice at each test point. During the first timing run, the interruption shall occur during the pullup cycle. During the second run, the interruption shall occur during the release cycle. The tolerance listed in table I shall apply for all timer settings.

* 4.6.13 Dielectric strength. The timer shall be placed in a chamber having a pressure of 1.67 inches Hg absolute (65,000 feet) and a potential of 300V rms commercial frequency applied for a period of 1 minute across the connector pins or pins and ground. There shall be no evidence of breakdown. The case grounds may be removed for this test.

4.6.14 Humidity. The timer shall be subjected to a humidity test in accordance with MIL-STD-810, method 507, procedure I. After completion of this test, the timer shall be subjected to and shall meet the tests specified in 4.6.2.1, 4.6.2.2, 4.6.2.2.1 and 4.6.2.2.2, except the abbreviated test schedule shall apply.

4.6.15 Dust. The timer shall be subjected to a dust test in accordance with MIL-STD-810, method 510, procedure I. The timer shall then be subjected to and shall meet the tests specified in 4.6.2.1, 4.6.2.2, 4.6.2.2.1, and 4.6.2.2.2, except the abbreviated test schedule shall apply.

4.6.16 Fungus. The timer shall be subjected to a fungus test in accordance with MIL-STD-810, method 508, procedure I. At the conclusion of this test, the timer shall be removed from the chamber and subjected to the test specified in 4.6.2.2.

4.6.17 Salt fog. The timer shall be subjected to a salt fog test in accordance with MIL-STD-810, method 509, procedure I. At the completion of this test, the timer shall be removed from the chamber and subjected to the test specified in 4.6.2.2 and 4.6.2.2.2, except the abbreviated test schedule shall apply.

4.6.18 Explosive decompression. The timer shall be subjected to an explosive decompression test in which the surrounding air pressure varies with time in accordance with conditions I and II of figure 2. The requirements specified in

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:51Z
Check the source to verify that this is the current version before use.

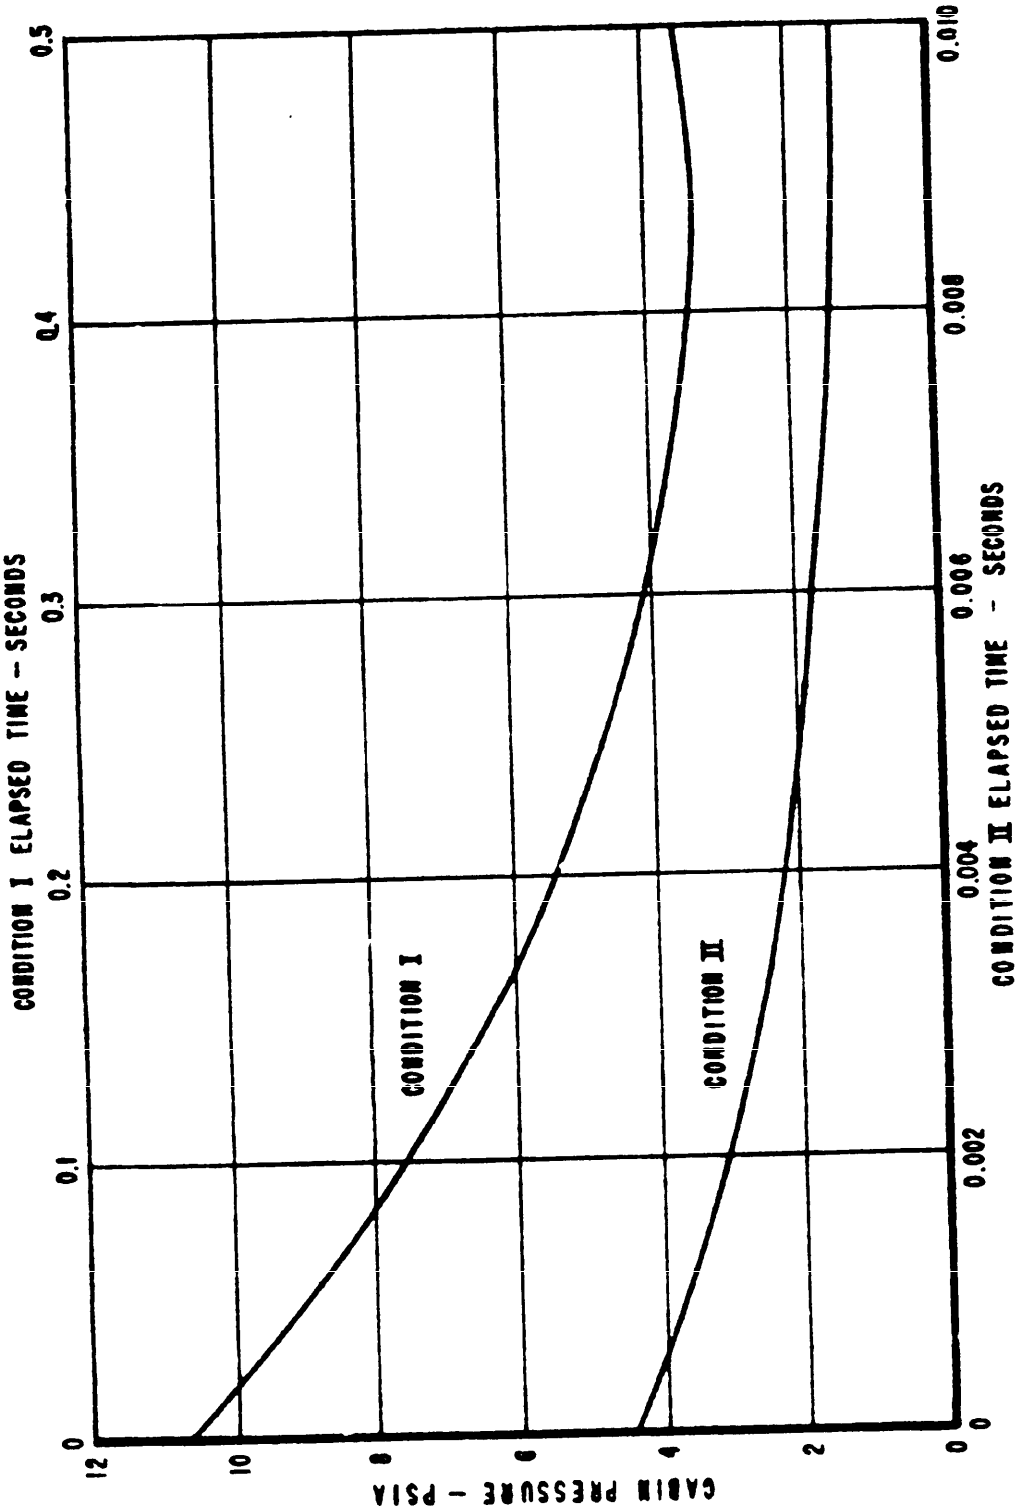


FIGURE 2. Cabin Pressure Decay During Explosive Decompression (Conditions I & II)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:51Z
Check the source to verify that this is the current version before use.

3.5.4 shall be met. The timer shall then meet the tests specified in 4.6.2.1, 4.6.2.2, 4.6.2.2.1, and the abbreviated test schedule of 4.6.2.2.2.

* 4.6.19 Setting knob and counter cycling. The pullup set knob shall be cycled from 01.0 second to 59.0 ±0.5 seconds and return to 01.0 second. This excursion shall be considered one cycle of operation. The total cycling period shall be a minimum of 2,500 cycles for each function and shall be conducted at a rate of 9 ±0.5 cpm. The last 1,000 cycles for each function shall be conducted over the entire range of the scale and shall cause the slip clutch to engage for at least two complete revolutions of the set knobs at both ends of the scale. Prior to the cycling test, the torque required to turn the set knobs shall be measured and recorded. Upon completion of the cycling test, a physical and functional operation inspection in accordance with 4.6.2.1, 4.6.2.2, and 4.6.2.2.2 shall be conducted to assure that binding, deformation, and malfunction are not evident. The torque required to turn the set knobs shall again be measured and shall not differ from the measurement recorded at the start of the cycling test by more than 2 ounce-inches. Before and after this test, each setting knob shall be rotated as specified in 4.6.8 at least five times in each direction.

* 4.6.20 Altitude. The timer shall be placed in a chamber at an absolute pressure of 1.67 inches Hg (65,000 feet) and tested as specified in MIL-STD-810, method 500, procedure II. While at the specified pressure, the timer shall meet the test specified in 4.6.2.2. The rate of pressure change shall be 500 feet per minute minimum.

4.6.21 Temperature-altitude. The timer shall be subjected to a temperature-altitude cycling test in accordance with MIL-STD-810, method 504, for class 2 equipment, except the altitude shall be 65,000 feet and the temperature range shall be from -54° to +71°C. At the completion of this test, the timer shall be inspected for leakage and cracking of the pressure seals. The timer shall then be subjected to the tests specified in 4.6.2.1 through 4.6.2.2.2.

4.6.22 Acceleration. An acceleration force of 5g shall be applied in each of the orthogonal directions in accordance with MIL-STD-810, method 513, procedure II, except as follows:

a. An acceleration of 13g shall be applied along the axis perpendicular to the face plate and in a direction extending from the face plate toward the timer.

b. An acceleration of 13g shall be applied along the axis parallel with the face plate and in a direction extending from the top toward the bottom of the face plate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:51Z
Check the source to verify that this is the current version before use.

The duration of each application shall be at least 1 minute in each direction before initiating a timing cycle. A full-scale timing cycle for both the pullup and release indicators shall then be initiated and timed to their completion. At no time shall there be even momentary PULLUP or RELEASE signals until initiated; they shall hold solidly until released in the normal manner. Upon deactivating the timer by turning off the external START or EXCITATION switch, the PULLUP and RELEASE signals shall disappear. Upon completion of this test, the timer shall meet the test specified in 4.6.2.2.2.

4.6.23 Shock. At the completion of all other tests, one timer shall be subjected to a shock test in accordance with MIL-STD-810, method 516, procedure procedure III, except that severity of the shocks shall be 50g and the duration of each shock shall be 8.5 milliseconds. Upon completion of this test, the timer shall be subjected to the tests specified in 4.6.2.1, 4.6.2.2, 4.6.2.2.1, and 4.6.2.2.2, except the abbreviated test schedule shall apply.

4.6.24 Reliability. The six timers specified in 4.4.1 shall be subjected to a reliability test which shall demonstrate a minimum acceptable MTBF of 1,000 hours to a 90 percent confidence level. The total test time shall be computed from figure 3. No preventive maintenance shall be performed.

4.6.24.1 Test equipment. The test equipment and fixtures shall include provisions for timer operation cycling, temperature cycling, and vibration.

4.6.24.2 Timing cycling. During this test, the timers shall produce timing cycles at a rate of 30 ±2 cycles per hour of full-scale timing settings on both the pullup and release channels. Pullup and release loads as specified in 3.5.2 shall be imposed on both output circuits throughout this test.

4.6.24.3 On-off cycling. The timer shall be turned off for the first hour of the room-temperature cycle during temperature cycling.

4.6.24.4 Temperature cycling. The temperature of the chamber in which the timers are tested shall be cycled as follows: Starting at room temperature, increase temperature to 71°C and stabilize for 2 hours; decrease temperature to [illegible] and stabilize for 2 hours; increase temperature to room temperature and stabilize for 2 hours; repeat.

4.6.24.5 [illegible]bration cycling. Throughout this test, the timers shall be vibrated [illegible] period of 10 minutes during each hour at any frequency between 20 and 60 [illegible] an applied acceleration of 2g.

Source: https://assist.dla.mil -- Downloaded: 202610-21T11:51Z
Check the source to verify that this is the current version before use.

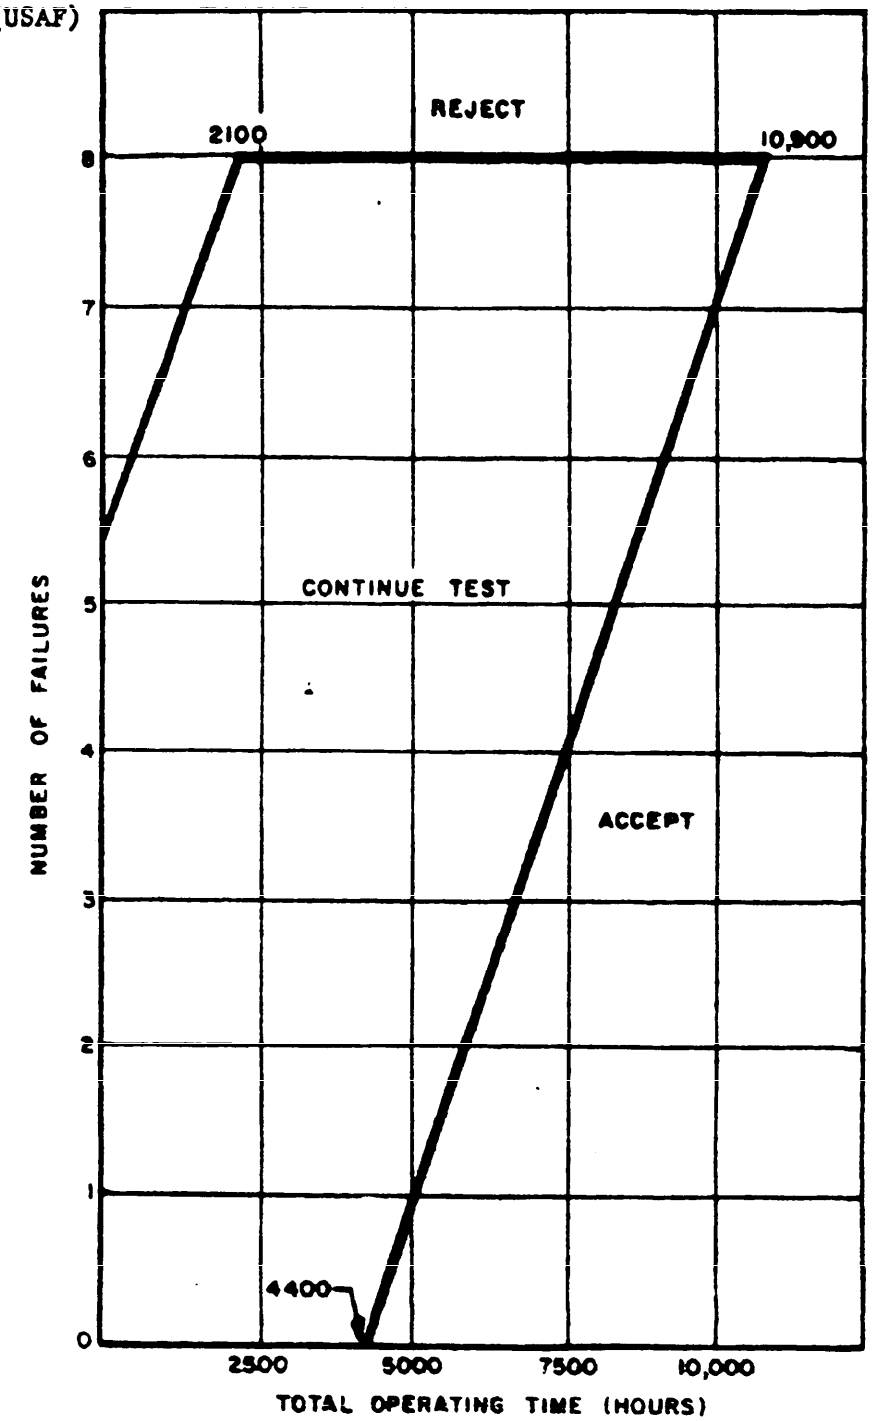


FIGURE 3. Reliability

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:51Z
Check the source to verify that this is the current version before use.

* 4.6.24.6 Performance check. At each 100-hour interval and at the end of this test, the timers shall be checked for voltage drop and scale error (abbreviated test schedule shall apply). During each scale error test, if any two test points exceed the allowable tolerances by ±15 milliseconds, one malfunction shall be charged against this test. During the 100-hour checks, voltage drop may exceed 1 percent but shall not exceed 10 percent.

4.6.24.7 Failure criteria. For an accept decision, each timer shall be operated within 50 hours of its total time. If a timer fails, all testing shall be stopped and the failed unit examined for cause of failure. The timer shall then be repaired and testing shall be continued. The procuring activity shall immediately be informed of the failure, its cause, and the type of repair that was performed. The number of failures permitted shall not exceed eight.

4.6.24.8 Reporting. The reliability test log shall be included in the test report (see 4.4.2).

4.6.25 Longevity. Testing of two of the six reliability test samples shall be continued through a longevity test for a total of 2,500 hours on each sample. Results of this test shall be reported to the procuring activity.

4.7 Inspection of preservation, packaging, packing, and marking for shipment. Inspection of preservation, packaging, packing, and marking for shipment shall be in accordance with section 5.

* 5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A. Unless otherwise specified in the contract or order, timers shall be preserved in accordance with MIL-P-116, method III and packaged in accordance with MIL-STD-794, one each in a container conforming to PPP-B-636.

5.1.2 Level C. Each timer shall be preserved and packaged in a manner that will afford adequate protection against corrosion, deterioration, and physical damage during shipment from the supply source to the first receiving activity. This level may conform to the supplier's standard practice provided the latter meets this requirement.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:51Z
Check the source to verify that this is the current version before use.

5.2.1 Level A. Timers preserved and packaged as specified in 5.1.1 shall be packed in weather-resistant shipping containers conforming to PPP-B-636. The grade of each shipping container, determined by the gross weight and cube, shall comply with the applicable special requirements table of the specification. Interior cushioning, blocking, bracing, and waterproofing shall be in accordance with MIL-STD-1186. Closure and strapping shall be in accordance with the appendix of PPP-B-636. Exterior shipping containers shall be of uniform shape and size and of minimum cube and tare.

5.2.2 Level B. Level B packing shall be the same as level A except that waterproofing will not be required and domestic shipping containers will be used.

5.2.3 Level C. Packages that require overpacking for acceptance by the carrier shall be placed in exterior-type shipping containers in a manner that will ensure safe transportation at the lowest rate to the point of delivery. Containers shall comply with the uniform freight classification rules or regulations of other carriers as applicable to the mode of transportation.

5.3 Marking. In addition to any other marking required by the contract or order, interior and exterior containers shall be marked in accordance with MIL-STD-129.

5.3.1 Reinspection date marking. Reinspection date marking shall be in accordance with the instructions of the procuring activity.

6. NOTES

6.1 Intended use. The fire control bombing timers covered by this specification are intended for use in fighter aircraft.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification

b. Type of timer required (see 1.2)

c. Levels of preservation, packaging, and packing required (see section 5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:51Z
Check the source to verify that this is the current version before use.

6.2.1 The contractor will provide the following to the qualifying activity:

a. Outline drawings of the timer covering dimensions, face plate layout, and any other configuration details required by this specification

b. Three copies of the test report specified in 4.4.2 covering compliance of the timer with all testing specified herein.

6.3 Definitions

6.3.1 Timing phase. The timing phase is the time-out of each timing parameter, such as pullup or release timing.

6.3.2 Face plate. The face plate is the integrally lighted face of the timer.

6.4 Qualification. With respect to products requiring qualification, awards will be made only for such products which are, at the time set for opening of bids, qualified for inclusion in the applicable Qualified Products List whether or not such products have actually been so listed by that date. The attention of suppliers is called to this requirement, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. The activity responsible for the Qualified Products List is the Aeronautical Systems Division, Attn: ASNFI-20, Wright-Patterson Air Force Base, Ohio 45433, and information pertaining to qualification of products may be obtained from that activity.

6.5 Marginal indicia. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in those notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Air Force - 11

Review activity:
Air Force - 82

Preparing activity:
Air Force - 11

Project No. 6645-F267

Source: https://assist.dla.mil -- Downloaded: 202610-21T11:51Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:51Z
Check the source to verify that this is the current version before use.