MIL-F-16723E
21 September 1981
SUPERSEDING
MIL-F-16723D
20 September 1976

MILITARY SPECIFICATION

FAIRLEADS AND ROLLERS (FOR PONTOON ASSEMBLIES)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers fairleads and rollers used in conjunction with P-series pontoon structures.

* 1.2 Classification. The items shall be of the following styles, as specified (see 6.2).

Style 1 - Fairlead, sheave (box) mark GV-13.
Style 2 - Fairlead, sheave (hoist), mark WT-4.
Style 3 - Fairlead, roller (spool guide), mark WT-6.
Style 4 - Fairlead, roller (single line).
Style 6 - Fairlead, roller (double line).
Style 8 - Roller, anchor cable.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 *Specifications and standards*. The following specifications and standards, of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-P-116 - Preservation-Packaging, Methods of.
MIL-F-3541 - Fitting, Lubrication.
MIL-P-5431 - Plastic, Phenolic, Graphited, Sheets, Rods, Tubes and Shapes.
MIL-P-24441 - Paint, Epoxy-Polyamide.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer (Code 156), Naval Construction Battalion Center, Port Hueneme, CA 93043, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 2040

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:19Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED STD H28 - Screw-Thread Standards for Federal Services.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-794 - Parts and Equipment, Procedures for Packaging and Packing of.

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

AMERICAN PETROLEUM INSTITUTE (API)

API STD 5A - Casing, Tubing, and Drill Pipe.

(Application for copies should be addressed to the American Petroleum Institute, 1801 K Street, N.W., Washington, DC 20006.)

AMERICAN SOCIETY OF MECHNICAL ENGINEERS (ASME)

Boiler and Pressure Vessel Code - Section IX

(Application for copies should be addressed to the American Society of Mechanical Engineers, 345 East 47th Street, New York, NY 10017.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

A36 - Structural Steel.
A108 - Cold-Finished Carbon Steel Bars and Shafting.
A120 - Black and Hot-Dipped Zinc-Coated (Galvanized) Welded and Seamless Steel Pipe for Ordinary Uses.
A307 - Low-Carbon Steel Externally and Internally Threaded Standard Fasteners.
B144 - High-Leaded Tin Bronze Sand Castings.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:19Z
Check the source to verify that this is the current version before use.

AMERICAN WELDING SOCIETY (AWS)

D1.1 - Structural Welding code.
Welding Inspection Manual.

(Application for copies should be addressed to the American Welding Society, 2501 N.W. 7th Street, Miami, FL 33125.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Description. A fairlead is a device that consists of sheaves or rollers arranged to permit reeling in of a cable from any direction, and is used in conjunction with winches and similar apparatus. A roller is a revolving cylinder over which a cable is moved.

3.2 First article. When specified (see 6.2), the contractor shall furnish a unit for first article inspection and approval (see 4.3 and 6.4).

* 3.3 Materials. Materials used shall be free from defects which would adversely affect the performance or maintainability of individual components or of the overall assembly. Materials not specified herein shall be of the same quality used for the intended purpose in commercial practice. Unless otherwise specified herein, all equipment, material, and articles incorporated in the work covered by this specification are to be new and fabricated using materials produced from recovered materials to the maximum extent possible without jeopardizing the intended use. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this specification unless otherwise specified.

3.3.1 Pipe. Pipe shall be extra strong black steel pipe conforming to ASTM A120, schedule 80.

3.3.2 Tubing. Tubing shall be seamless steel tubing of the size and wall thickness shown on the applicable figures. Material shall conform to API STD 5A, grade J.

3.3.3 Structural steel. The steel plates, bars, and structural shapes shall conform to ASTM A36.

3.3.4 Steel pins and axles. Pins and axles shall conform to ASTM A108, grade 1040. At the option of the vendor, alloy steel having equivalent or superior mechanical properties may be utilized.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:19Z
Check the source to verify that this is the current version before use.

3.3.5 Sheaves. Sheaves shall be drop forged or cast steel at the option of the vendor.

* 3.3.6 Bolts. The bolts, nuts, and tap bolts shall conform to ASTM A307 and shall have a tensile strength of not less than 65,000 pounds per square inch. Screw threads shall conform to FED STD H28.

3.3.7 Plastic bushing bearings. Plastic bushing bearings shall be the flanged type of graphite impregnated plastic conforming to MIL-P-5431, or other low-frictional plastic. When specified (see 6.2), suitable anti-friction bearings having seals and lubrication fittings shall be used in lieu of plastic bushing bearings.

3.3.8 Bronze sleeve bearings. Bronze sleeve bearings shall conform to ASTM B144 as cast condition. When specified (see 6.2), suitable antifriction bearings having seals and lubrication fittings shall be used in lieu of bronze sleeve bearings.

3.4 Design and construction. The design of the unit shall be in accordance with accepted commercial practice for this type of equipment.

3.4.1 Fairlead, sheave (box), style 1 (mark GV-13). The box sheave fairlead assembly shall be constructed as shown on Figure 1. Sheave pins shall be drilled for passage of lubricant to sheave bearings, and pressure lubrication fittings shall be provided.

3.4.2 Fairlead, sheave (hoist), style 2 (mark WT-4). The fairlead shall be constructed as shown on Figure 2 and shall be provided with pressure lubrication fittings.

3.4.3 Fairlead, roller (spool guide), style 3 (mark WT-6). The style 3 fairlead shall be constructed as shown on Figure 3.

3.4.4 Fairlead, roller (single line), style 4. The single line fairlead shall be constructed as shown on Figure 4, sheets 1 and 2 and Figure 6, sheets 1 and 2. Pressure lubrication fittings shall be provided.

3.4.5 Fairlead, roller (double line), style 6. The fairlead assembly shall be constructed as shown on Figure 5, sheets 1, 2, and 3 and Figure 6, sheets 1 and 2. Pressure lubrication fittings shall be provided.

3.4.6 Roller, anchor cable, style 8. The roller assembly shall be constructed as shown on Figure 7.

* 3.5 Lubrication. Unless otherwise specified (see 6.2), pressure lubrication fittings shall conform to type IV or V of MIL-F-3541. The bearing surfaces of all parts that require lubrication shall be thoroughly greased, in accordance with 5.1.1.3, prior to delivery.

* 3.6 Cleaning and painting.

* 3.6.1 Cleaning. All steel surfaces of the fabrications to be painted shall be cleaned by blasting. Blast cleaning shall be to a near white metal blast or cleaner. Near white metal blast is described as a surface with

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:19Z
Check the source to verify that this is the current version before use.

95 percent of each square inch free of all visible residue with the remaining 5 percent of each square inch having no more than very light shadows or streaks caused by rust stains or mill scale oxides. Blast cleaning shall utilize either dry sand or crushed grit made of cast iron, steel, or synthetic grit. Grit shall be of a maximum particle size no larger than that which is able to pass through a 16 mesh screen.

* 3.6.2 Epoxy-polyamide painting. Epoxy-polyamide paint shall conform to MIL-P-24441. Formulations of MIL-P-24441 shall be applied only to dry surfaces in an atmosphere having a relative humidity not greater than 80 percent and a temperature of 70° Fahrenheit (F) or higher. When ambient atmosphere does not meet these requirements, all painting shall be accomplished in a humidity and temperature controlled environment. There shall be 16 hours of curing between each coat. If more than 7 days elapse between epoxy coats, the surface shall be cleaned with water and detergent, rinsed with fresh water, dried, and then a tack coat (1 to 2 mils wet film thickness) of the last coat applied before application of the next full coat called for. The two components of all the MIL-P-24441 coatings should be mixed in equal volume by first thoroughly stirring each component separately and then stirring the components together. After mixing, there shall be a waiting period of approximately 2 hours at 50° to 60°F, 1 to 1-1/2 hours at 60° to 70°F, and 1/2 to 1 hour above 70°F before applying the coating to insure complete curing. If spray or roller painting is utilized, all corners and welds shall first be thoroughly brush coated for each coat of paint. The paint application shall be uniform in thickness and color, smooth in appearance, free of dry over-spray, pinholes, orange peel, sags, or other film defects. Threaded surfaces and gages shall not be painted. All painted areas shall be touched-up where paint is removed as a result of handling or assembly at the manufacturer's plant.

* 3.6.2.1 Primer and intermediate coat. Primer and intermediate coats shall consist of epoxy-polyamide paint conforming to MIL-P-24441. The primer coat shall be green, formula 150, and shall have a minimum 2.5 mil dry film thickness. The intermediate coat shall be white, formula 152, and shall have a minimum 2.5 mil dry film thickness. Priming of the cleaned surface shall be completed within a maximum of 4 hours after blast cleaning. Epoxy-polyamide paint shall be applied in accordance with 3.6.2.

* 3.6.2.2 Finish coat. All metal surfaces to be painted, shall be given one finish coat of epoxy-polyamide paint conforming to MIL-P-24441. The finish coat shall be haze gray No. 27, formula 151, and shall have a minimum 3.0 mil dry film thickness.

* 3.7 Identification marking. Equipment shall be marked with its noun name, mark number, and NSN as specified (see 6.2). The required marking shall be applied directly to the surface of the item by metal stamp, vibro peening, embossing, forging, casting, or molding. Marking shall be in Gothic type capital letters and Arabic numerals not less than 1-inch high for stenciled information and not less than 3/16-inch high for information on cloth tags.

3.8 Workmanship.

3.8.1 Steel fabrication. The steel used in fabrication shall be free from kinks, sharp bends, and other conditions which would be deleterious to the

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:19Z
Check the source to verify that this is the current version before use.

finished product. Manufacturing processes shall not reduce the strength of the steel to a value less than intended by the design. Manufacturing processes shall be done neatly and accurately. All bends shall be made by controlled means to insure uniformity of size and shape.

3.8.2 Bolted connections. All bolt holes shall be accurately punched or drilled and shall have the burrs removed. Washers or lockwashers shall be provided. All bolts, nuts, and screws shall be tight.

* 3.8.3 Welding. Welding procedures shall be in accordance with a AWS D1.1 or ASME Boiler and Pressure Vessel Code, Section IX. The surface of parts to be welded shall be free from rust, scale, paint, grease, or other foreign matter. Weld penetration shall be such as to provide transference of maximum design stress through the base metal juncture. Fillet welds shall be provided, when necessary, to reduce stress concentration.

3.8.4 Castings. All castings shall be sound and free from patching, misplaced coring, warping, or any other defect which reduces the castings ability to perform its intended function.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) First article inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).

4.3 First article inspection. First article inspection shall be performed on one unit when a first article sample is required (see 3.2 and 6.2). This inspection shall include the examination of 4.5 and the tests of 4.6. The first article may be a standard production item from contractor's current inventory provided the item meets the requirements of the specification and is representative of the design, construction, and manufacturing technique applicable to the remaining items to be furnished under the contract.

4.4 Quality conformance inspection. Quality conformance inspection shall be performed on each sample selected in accordance with 4.4.1 and 4.4.2. This inspection shall include the examination of 4.5, the test of 4.6, and the packaging inspection of 4.7.

* 4.4.1 Inspection lot. All fairleads and rollers offered for delivery at one time shall be considered a lot for purpose of inspection.

Source: https://assist.dla.mil -- Downloaded: 202610-18T09:19Z
Check the source to verify that this is the current version before use.

* 4.4.2 Sampling. A random sample of fairleads and rollers shall be selected from each lot in accordance with MIL-STD-105.

* 4.4.2.1 Sampling for examination. Examination of the fairleads and rollers shall be based on inspection level II and an Acceptable Quality Level (AQL) of 4.0 percent defective.

4.4.2.2 Sampling for test. Tests of the fairleads and rollers shall be based on an inspection level S-4 and an AQL of 4.0 percent defective.

4.5 Examination. Each unit selected for examination shall be examined for compliance with Section 3 of this specification. This element of inspection shall encompass all visual and dimensional measurements.

4.5.1 Welding examination. Visual examination of welds and weldments shall be performed utilizing the proper mechanical gages, fixtures, and appropriate weld gages. Applicable sections of the AWS Welding Inspection Manual shall be followed including, but not limited to, verification of the following:

(a) Dimensional accuracy of the weldment including warpage.
(b) Conformity to figure requirements. This involves determination of whether all required welding has been done and whether finished welds conform with regard to size and contour.
(c) Acceptability of welds with regard to appearance including such items as surface roughness and weld spatter.
(d) The presence of unfilled craters, pock marks, undercuts, overlaps, and cracks.
(e) Evidence of mishandling from center punch or other inspection markings or excessive grinding.
(f) Proper marking of areas requiring weld repair.
(g) Subsequent inspection of weld repair.

* 4.6 Test. Each unit selected for testing shall be manually tested to determine that hand-free turning, by one man, of all rollers and sheaves is possible. Failure of one or more sheaves or rollers to be hand turnable shall be cause for rejection. Rejected units may be reworked by the contractor at no cost to the Government. Such reworked units shall be re-examined as described in 4.5 and retested as specified herein.

4.7 Packaging inspection. The preservation, packing, and marking of the fairleads and rollers shall be inspected to verify conformance with the requirements of Section 5.

5. PACKAGING

* 5.1 Preservation. The preservation shall be level A or commercial, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Disassembly. Disassembly shall be the minimum necessary to accomplish reduction in cube. Bolts, nuts, and pins shall be reinstalled in one of the mating parts and secured to prevent their loss.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:19Z
Check the source to verify that this is the current version before use.

5.1.1.2 Unpainted surfaces. Unpainted metal surfaces, threaded surfaces, and surfaces exposed by disassembly shall be coated with type P-1 preservative in accordance with MIL-P-116.

* 5.1.1.3 Lubrication fittings. Lubrication fittings specified in 3.5 shall be preserved with P-11 in accordance with MIL-P-116.

* 5.1.2 Commercial. The fairleads and rollers shall be preserved and packaged in accordance with the contractor's standard practice.

* 5.2 Packing. The packing shall be level A, B, or commercial as specified (see 6.2).

* 5.2.1 Levels A and B. Fairleads and rollers of the same style shall be packed in containers selected from Table II of MIL-STD-794 for the appropriate level.

* 5.2.2 Commercial. Fairleads and rollers of the same style shall be packed in a manner which will insure arrival at destination in satisfactory condition. Containers and packing shall comply with applicable carrier rules and regulations.

5.3 Marking. The marking shall be in accordance with MIL-STD-129.

6. NOTES

* 6.1 Intended use. Styles 1 through 4, and styles 6 and 8 are used with various pontoon assemblies and auxiliary equipment mounted on pontoon assemblies.

* 6.2 Ordering data. Acquisition documents should specify the following:

(a) Title, number, and date of this specification.
(b) Style required (see 1.2).
(c) When first article is required for inspection and approval (see 3.2, 4.3, and 6.4).
(d) When antifriction bearings are required (see 3.3.7 and 3.3.8).
(e) When lubrication fittings shall be other than as specified (see 3.5).
(f) Identification marking required (see 3.7).
(g) Level of preservation and level of packing required (see 5.1 and 5.2).

6.3 Contract data requirements. When this specification is used in an acquisition which incorporates a DD Form 1423 and invokes the provisions of paragraph 7-104.9(n) of the Defense Acquisition Regulations (DAR), the data requirements will be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the Contract Data Requirements List (DD Form 1423) incorporated into the contract. When the provisions of DAR 7-104.9(n) are not invoked, the data shall be delivered in accordance with the contract requirements.

6.4 First article. When a first article is required, it shall be tested and approved under the appropriate provisions of paragraph 7-104.55 of the DAR. The first article should be a first production item, or it may be a

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:19Z
Check the source to verify that this is the current version before use.

standard production item from the contractor's current inventory as specified in 4.3. The first article should consist of one unit. The contracting officer should include specific instructions in all acquisition instruments regarding arrangement for examinations, tests, and approval of the first article.

6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:

Navy - YD

User activity:

Army - ME

Preparing activity:

Navy - YD

Project No. 2040-N140

Source: https://assist.dla.mil -- Downloaded: 202640-18T09:19Z
Check the source to verify that this is the current version before use.



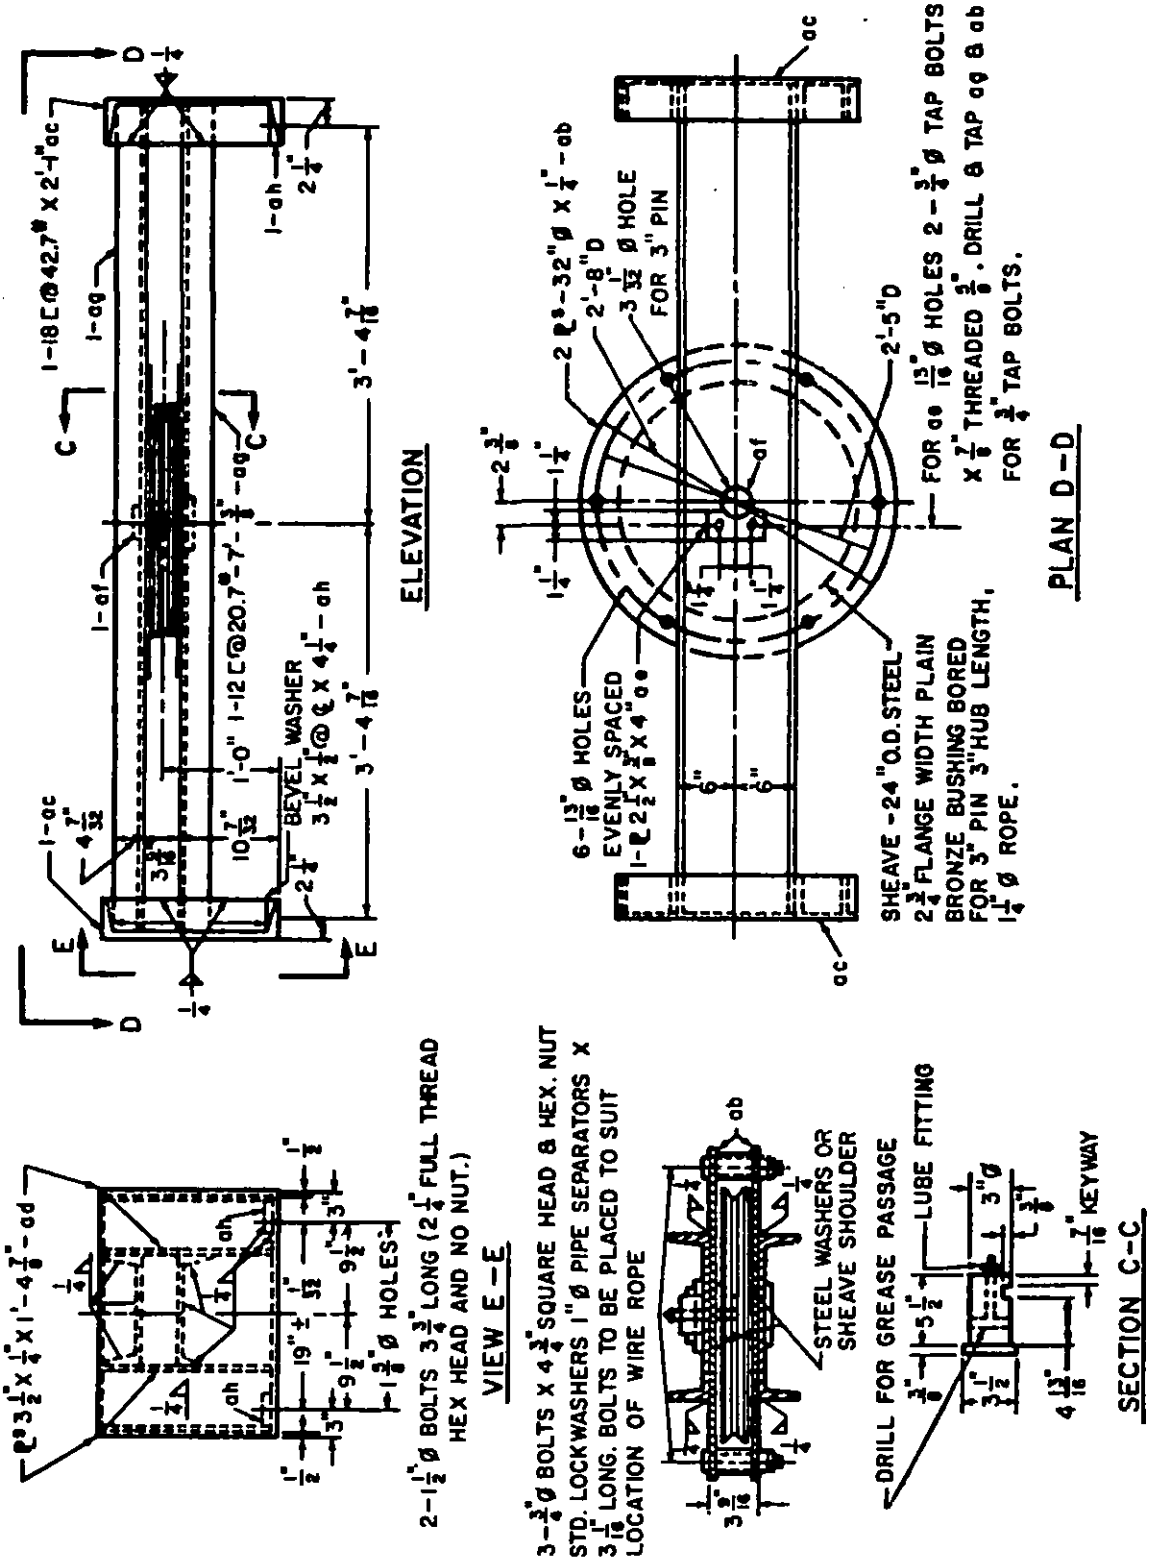


Figure 1. Style 1, Fairlead, sheave (box), Mark GV-13.

Source: https://assist.dla.mil -- Downloaded: 202610-18T09:19Z
Check the source to verify that this is the current version before use.

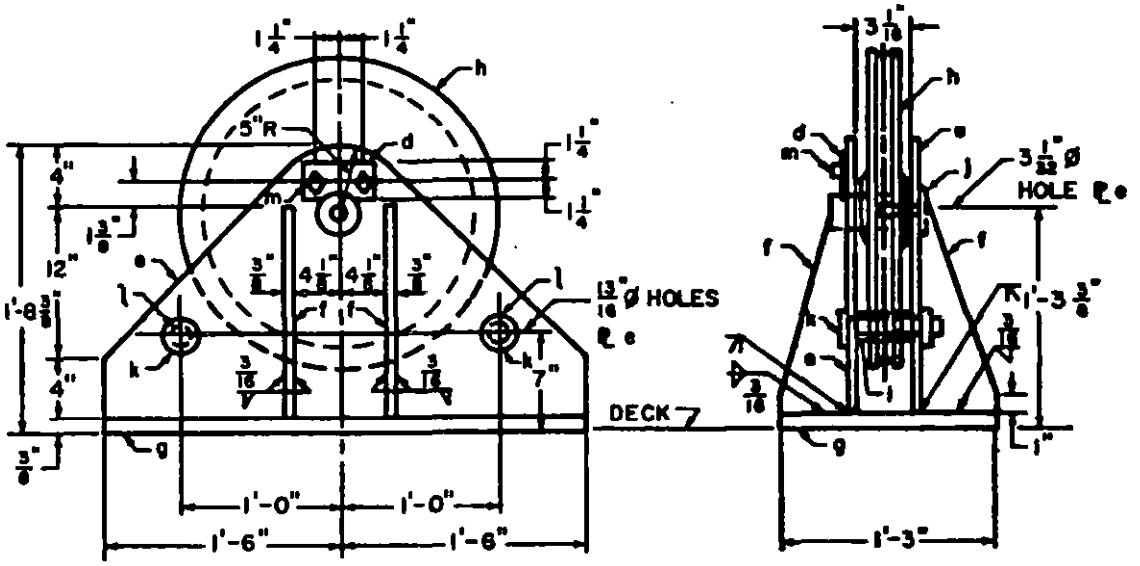

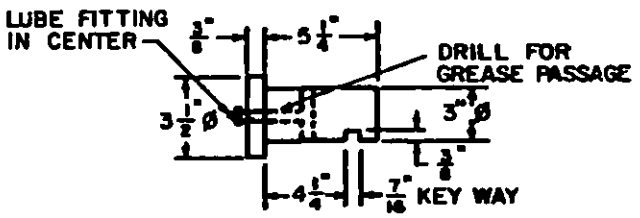


DETAIL OF 3"Ø PIN-J

Pc Mk	QTY	DESCRIPTION
d	1	℄ $2\frac{1}{2}$" X $\frac{3}{8}$" X 5"
e	2	℄ 20 $\frac{3}{8}$" X $\frac{5}{8}$" X 3'-0"
f	4	℄ $5\frac{1}{4}$" X $\frac{3}{8}$" X 1'-4"
g	1	℄ 15" X $\frac{3}{8}$" X 3'-0"
h	1	24" O.D. STEEL SHEAVE $2\frac{3}{4}$" FLANGE WIDTH, PLAIN BRONZE BUSHED FOR 3"Ø PIN; 3" HUB LENGTH; GROOVED FOR $1\frac{1}{4}$" ROPE.
j	1	STEEL PIN 3"Ø X $5\frac{1}{4}$" (SEE DETAIL)
k	2	$\frac{3}{4}$"Ø X $5\frac{1}{2}$" BOLTS $1\frac{1}{2}$" THREAD
l	2	1"Ø X $3\frac{1}{16}$" (EXACT) PIPE SPACERS
m	2	$\frac{3}{4}$"Ø TAP BOLTS X $\frac{7}{8}$" HEXAGON HEAD

Figure 2. Style 2, Fairlead, sheave (hoist), Mark WT-4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:19Z
Check the source to verify that this is the current version before use.

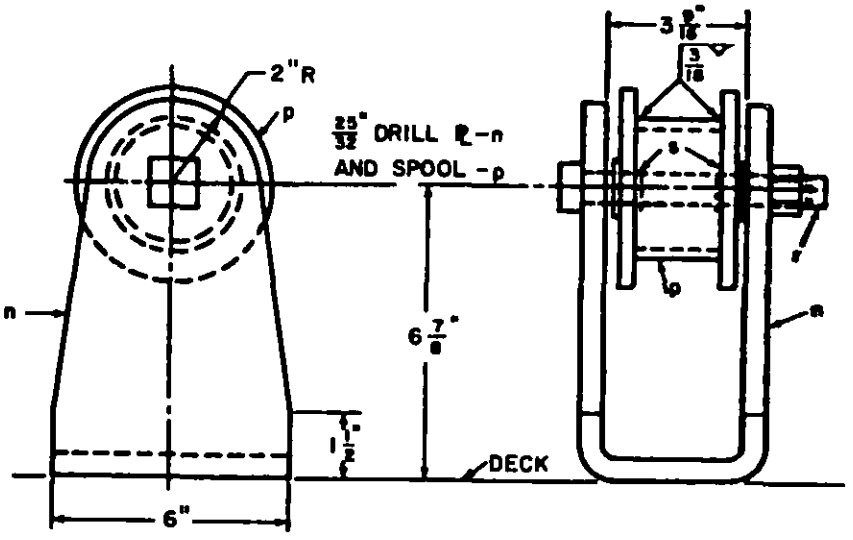

Pc Mk	QTY	DESCRIPTION
n	1	℄ 6" X 7/16" X 1'-9 1/2"
p	1	SPOOL { 1-3" Ø EXTRA STRONG PIPE X 3" ; 2-℄S-4 1/2" Ø X 1/4" }
r	1	3/4" Ø BOLT X 6", HEXAGON NUT AND COTTER
s	2	PLASTIC BUSHING BEARINGS

Figure 3. Style 3, Fairlead, roller (spool guide), Mark MT-6.

Source: https://assist.dla.mil -- Downloaded: 202610-18T09:19Z
Check the source to verify that this is the current version before use.

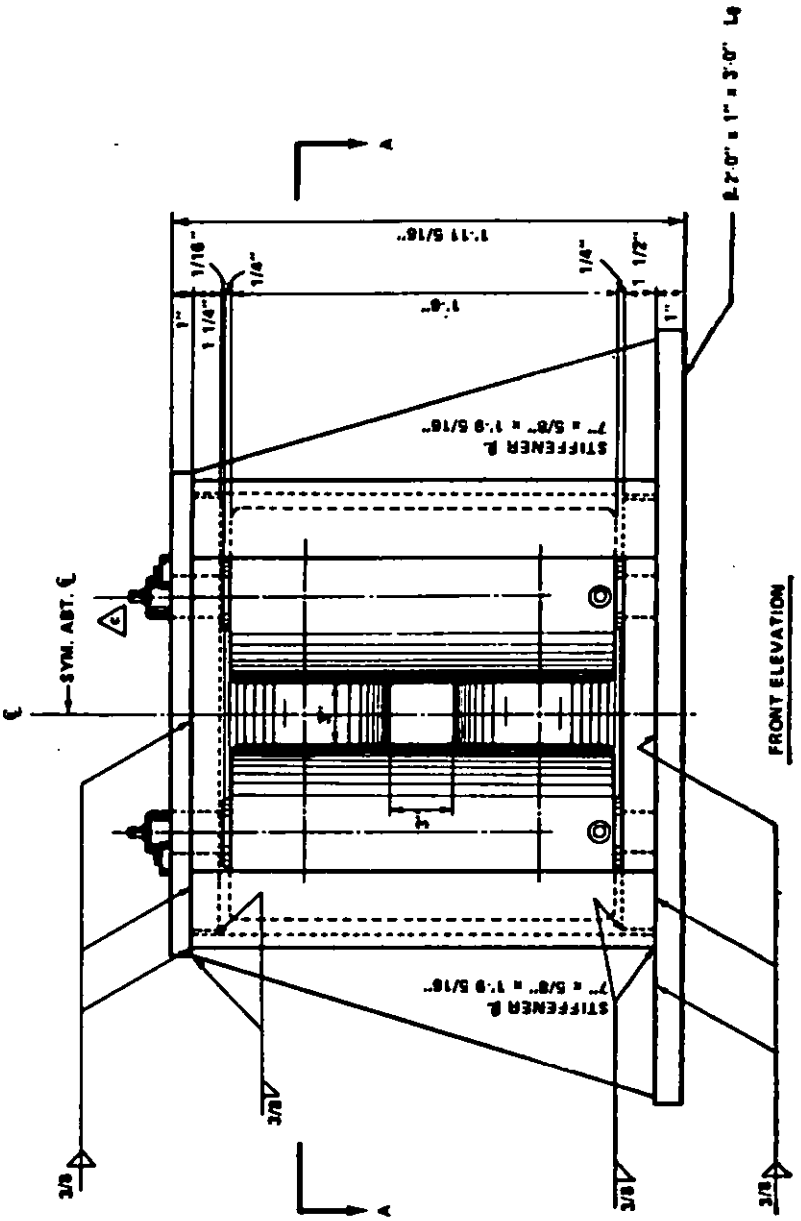
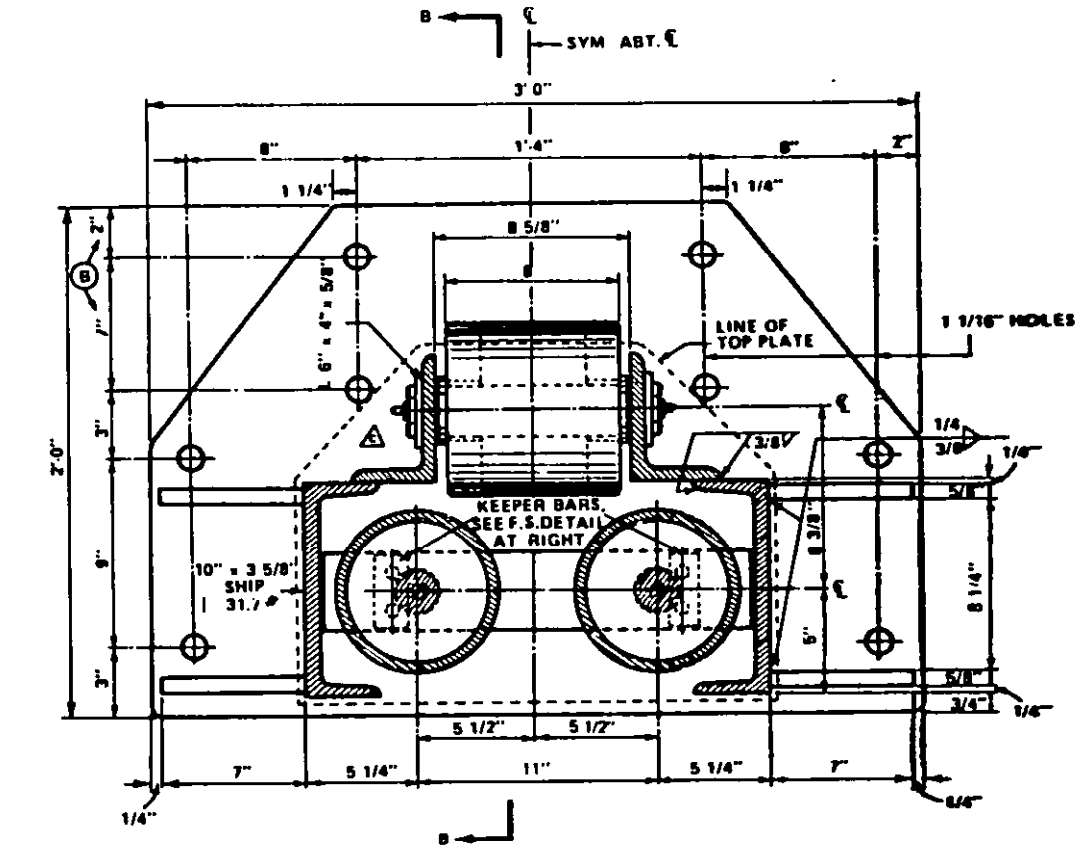


Figure 4. Style 4, fairlead, roller (single line) (Sheet 1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:19Z
Check the source to verify that this is the current version before use.



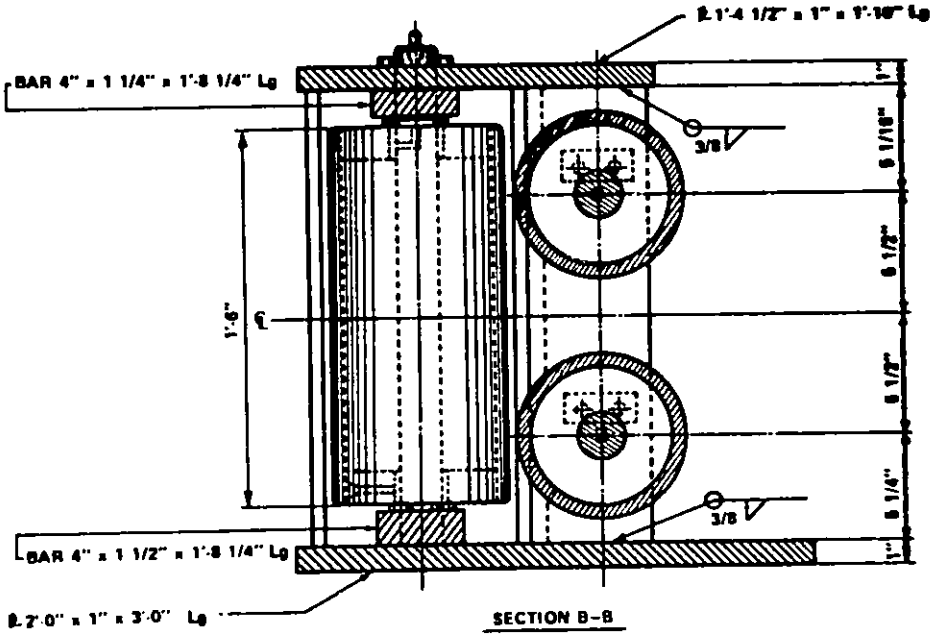


Figure 4. Style 4, Fairlead, roller (single line) (Sheet 2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:19Z
Check the source to verify that this is the current version before use.



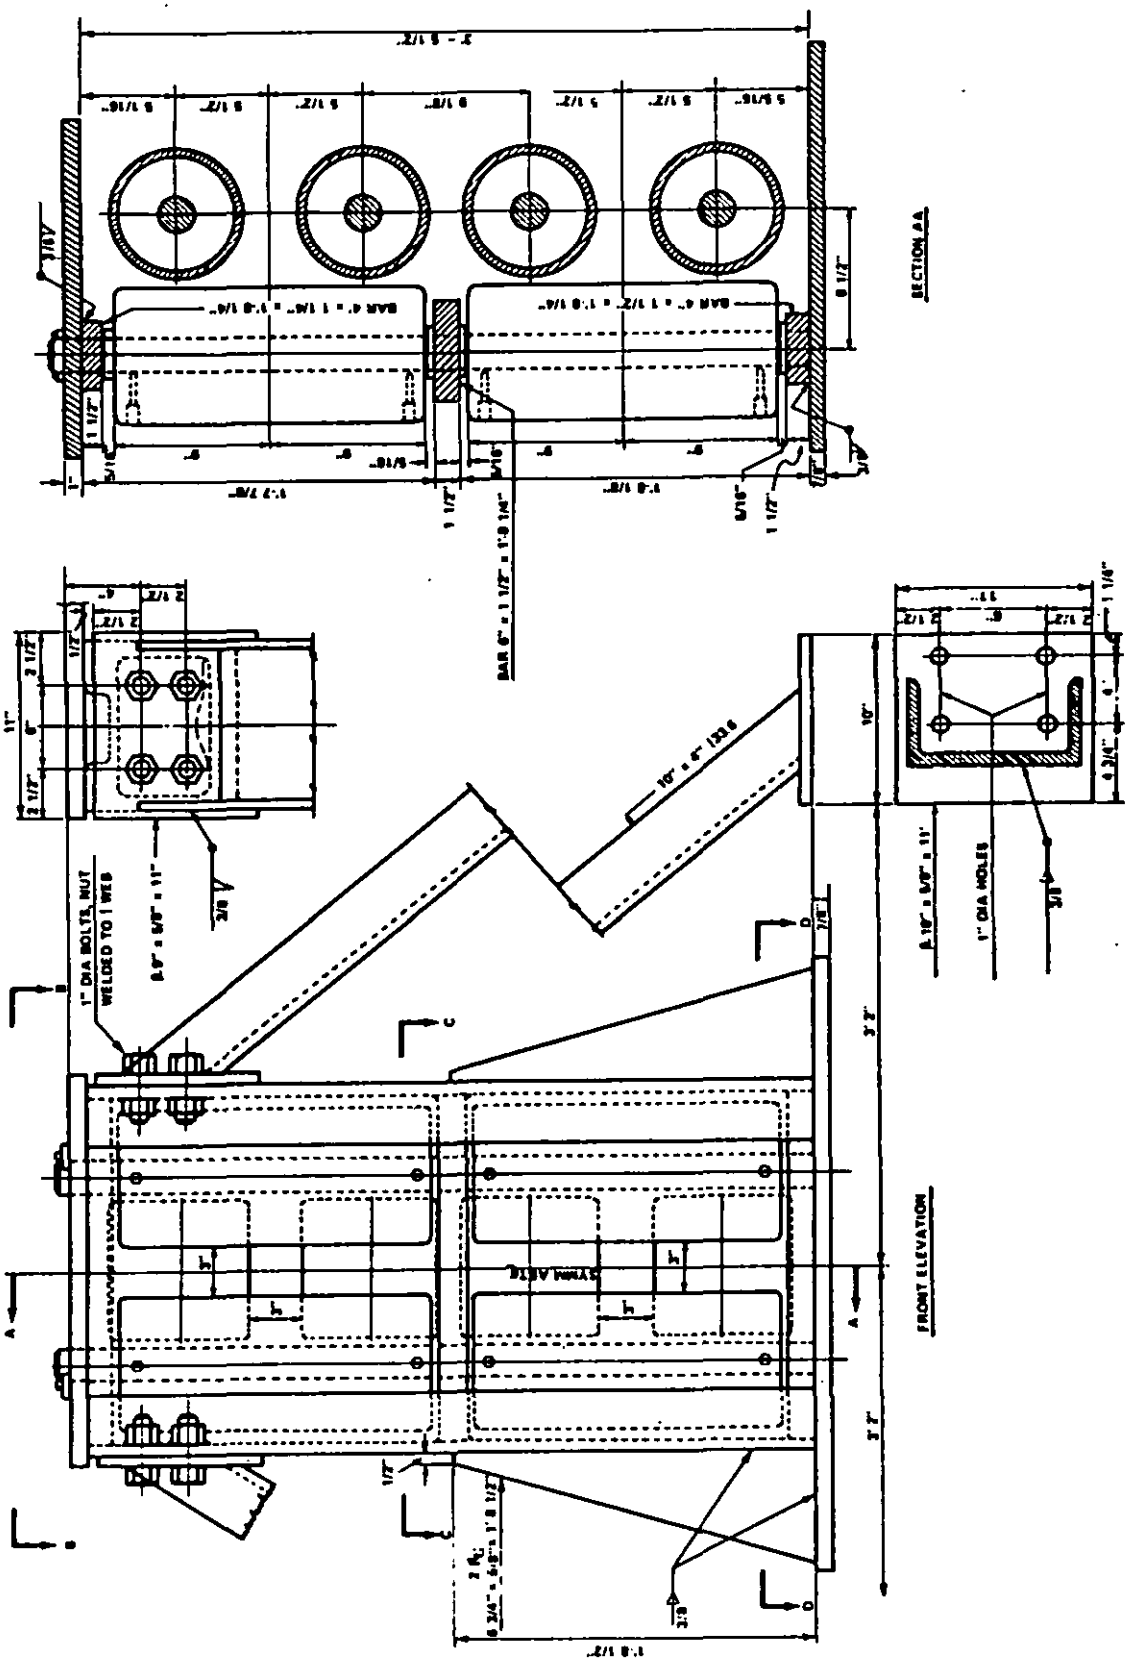


Figure 5. Style 6, Fairlead, roller (double line) (Sheet 1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:19Z
Check the source to verify that this is the current version before use.

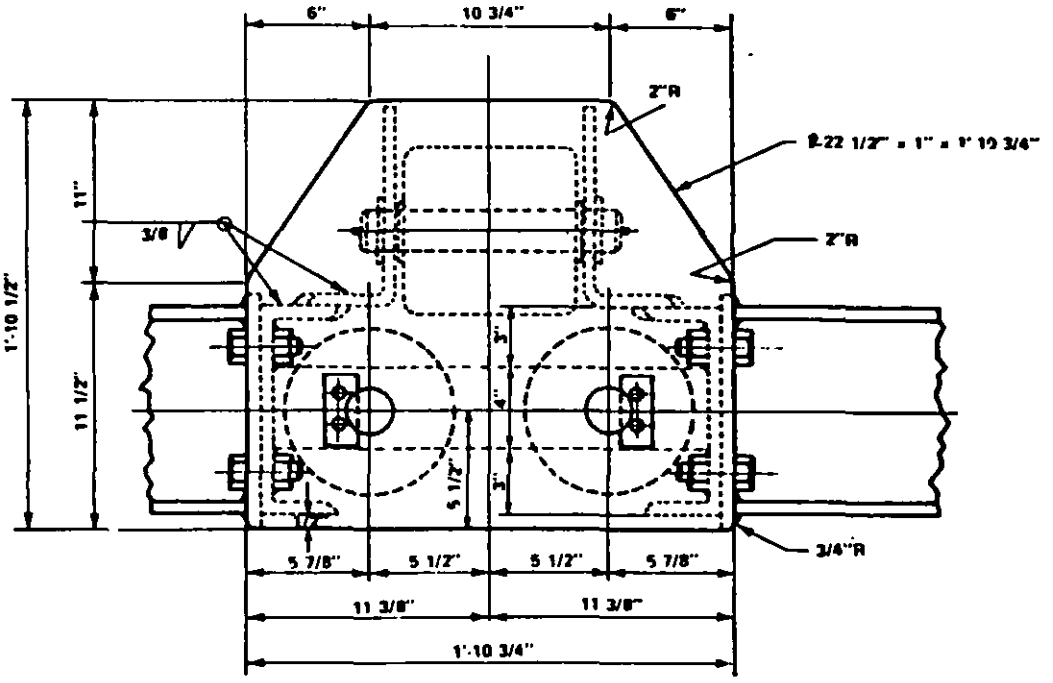

TOP VIEW "BB"

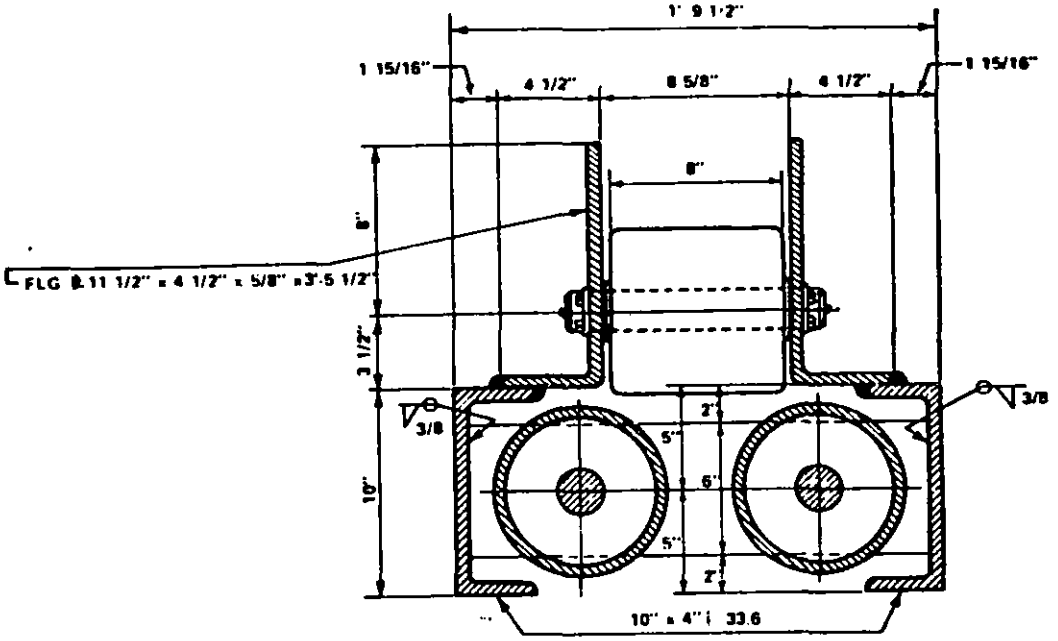

SECTION CC

Figure 5. Style 6, Fairlead, roller (double line) (Sheet 2).

Source: https://assist.dla.mil -- Downloaded: 202610-18T09:19Z
Check the source to verify that this is the current version before use.


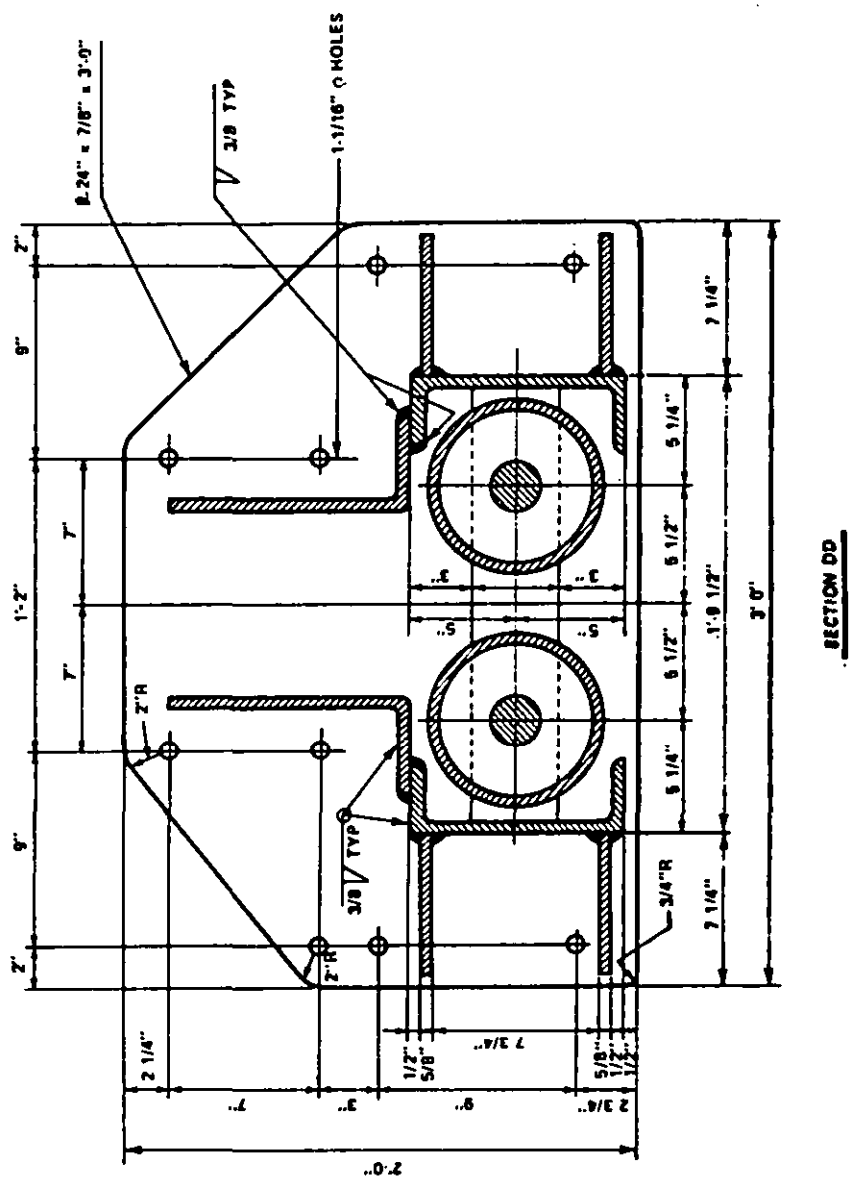


Figure 5. Style 6, Fairlead, roller (double line) (Sheet 3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:19Z
Check the source to verify that this is the current version before use.

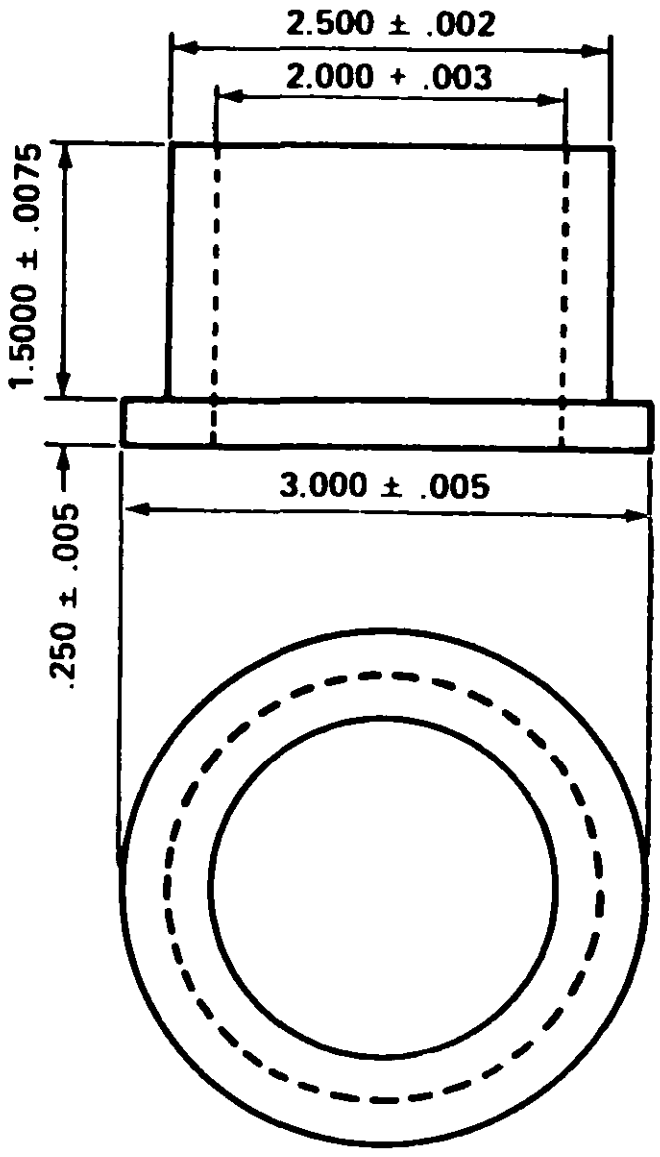

ⓒ FLANGED BEARING DETAIL
SCALE–FULL SIZE

PHOSPHOR BRONZE SAE STANDARD
NO. 64. 2 OIL GROOVES

Figure 6. Style 4 and 6, Details, (Flanged Bearing) (Sheet 1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:19Z
Check the source to verify that this is the current version before use.



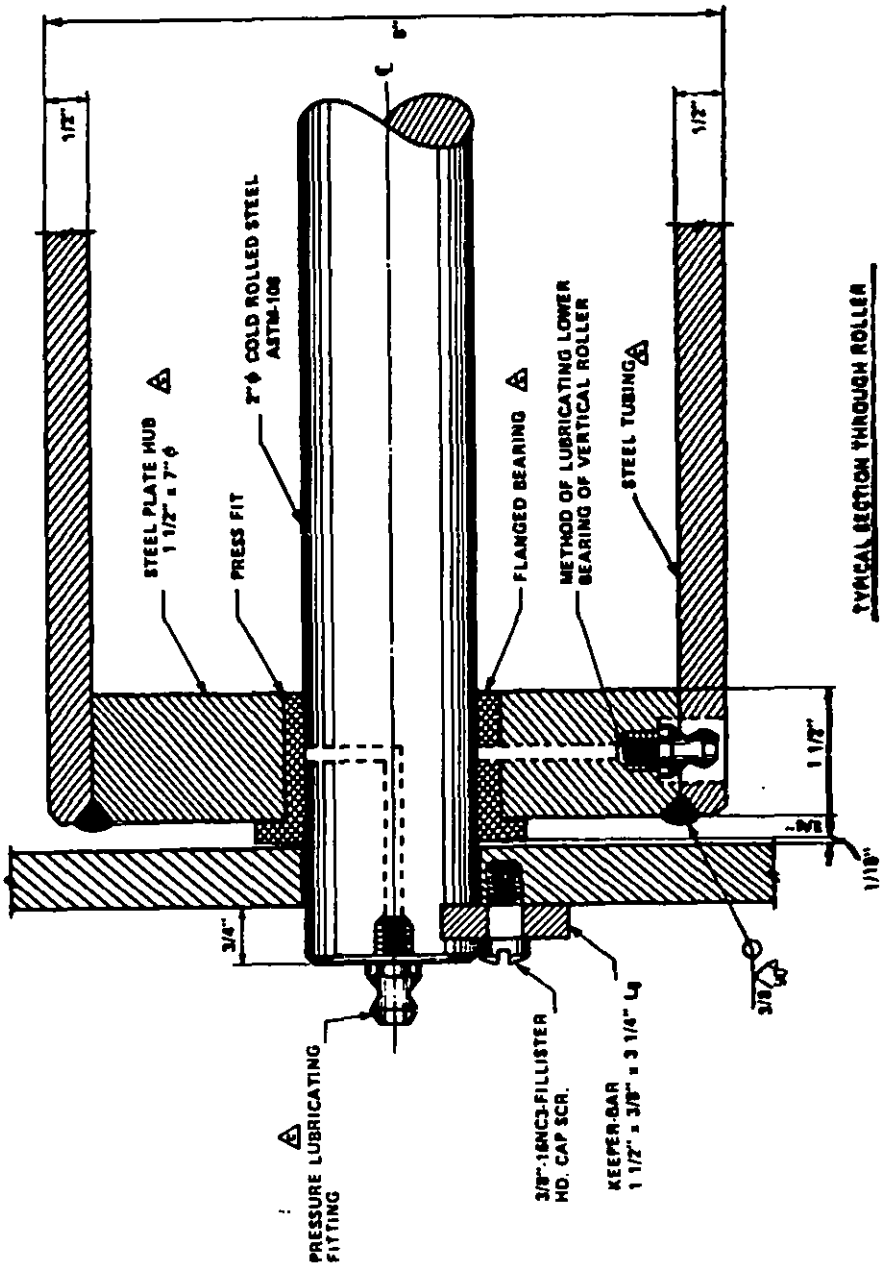


Figure 6. Style 4 and 6, Details, (Roller) (Sheet 2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:19Z
Check the source to verify that this is the current version before use.

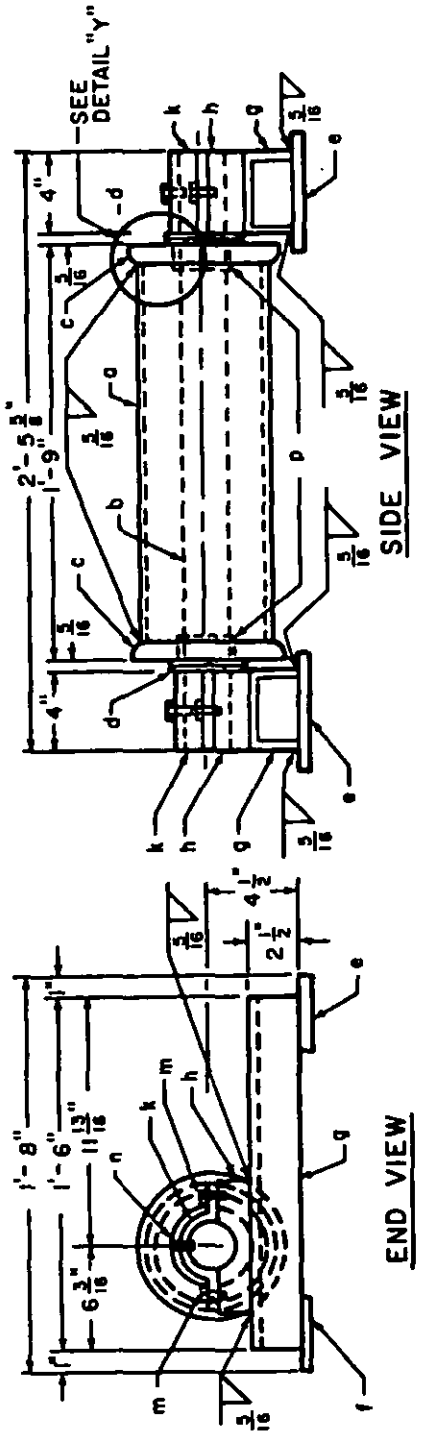

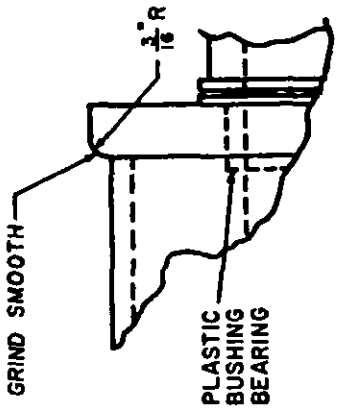

Pc Mk	QTY	DESCRIPTION
a	1	PIPE 6" X 1'-6 1/2" LONG, EXTRA STRONG
b	1	ROD 2 3/8" Ø X 2'-5 5/8"
c	2	PLATES 7 3/4" Ø X 1 1/4" -2 3/16" Ø HOLE F/BUSHING
d	2	WASHERS 3 1/2" Ø X 1/8"
e	2	PLATES 3 3/4" X 3/8" X 6"
f	2	PLATES 3 3/4" X 3/8" X 6"
g	2	4 ⌐ 13.8# X 1'-6"
h	2	PLATES 4" X 1 3/4" X 7"
k	2	PLATES 4" X 3/8" (BENT)
m	4	TAP BOLTS 1/2" Ø X 3/4"
n	2	TAP BOLTS 3/8" Ø X 2/4"
p	2	PLASTIC BUSHING BEARINGS

Figure 7. Style 8, Roller, anchor cable.

Source: https://assist.dla.mil -- Downloaded: 202610-18T09:19Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. 2040-N140

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-F-16723E - FAIRLEADS AND ROLLERS (FOR PONTOON ASSEMBLIES)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1426 1 OCT 76 *Replaces edition of 1 Jan 72 which may be used.* S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:19Z
Check the source to verify that this is the current version before use.