MIL-J-16643C
6 July 1978
SUPERSEDING
MIL-J-16643B
27 July 1967

MILITARY SPECIFICATION

JAR, SURGICAL DRESSING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type of glass surgical dressing jar, complete with a corrosion-resisting steel cap.

1.2 Classification. The glass surgical dressing jar covered by this specification shall be of the following styles.

Style 1 - Straight mouth.
Style 2 - Beaded lip mouth.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

PPP-B-566	- Boxes, Folding, Paperboard.
PPP-B-636	- Boxes, Shipping, Fiberboard.
PPP-B-676	- Boxes, Setup.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Directorate of Medical Materiel, DPSC-ATT, 2800 South 20th Street, Philadelphia, PA 19101, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 6530

Source: https://assist.dla.mil -- Downloaded: 202610-18T09:16Z
Check the source to verify that this is the current version before use.

STANDARDS

Federal

FED-STD-66	- Steel: Chemical Composition and Hardenability.
FED-TEST METHOD STD-151	- Metals: Test Methods.

Military

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise specified, the issue in effect on date of invitation for bids or request for proposals shall apply.

American Society for Testing and Materials (ASTM)

C-148 Polariscopic Examination of Glass Containers.

(Request for copies should be addressed to American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19101.)

3. REQUIREMENTS

* 3.1 First article. When specified in the procurement document, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.1.2.1 and 6.2).

3.2 Material.

3.2.1 Glass. Shall be either soda-lime or borosilicate glass, of the highest quality throughout, and suitable in all respects for the purpose intended.

3.2.2 Steel. Steel used in the manufacture of the caps shall be AISI 302 or 304 corrosion-resisting steel conforming to FED-STD-66, and shall meet the requirements for chemical composition, when tested as specified in 4.4.1.

* 3.3 Construction. Design and dimensions shall be in accordance with figure 1 and as specified herein. The bottom of the jar shall be concave, and the jar shall not rock while resting on a flat surface. Either style 1 or style 2 shall be acceptable.

3.3.1 Style 1. The rim of the mouth of style 1 jar shall be fire-polished.

3.3.2 Style 2. The rim of the mouth of style 2 jar shall be beaded as shown in figure 1.

Source: https://assist.dla.mil -- Downloaded: 20261O-18T09:16Z
Check the source to verify that this is the current version before use.

3.3.3 Cap. Design and dimensions of the cap shall be as shown in figure 1. Corrosion-resisting steel used in the cap shall have a thickness of not less than 0.025 inches. In the forming of the skirt of the cap, commercial tolerances in reduction of metal thickness shall be permitted. A round knob-type corrosion-resisting steel handle shall be securely riveted in the center of the cap. The outer surface of the cap shall be given as No. 4 commercial finish, or better; however, the underside of the cap may have a light satin buff, or better. Minor surface imperfections appearing as small scratches resulting from sheet steel stacking shall not be cause for rejection.. As an alternate, a round knob-type handle of anodized aluminum shall be acceptable.

3.4 Annealing. Annealing shall be such that the jars shall not have ring strain greater than a No. 1 temper when tested as specified in 4.4.2. Any longitudinal strain shall be faint or highly diffused.

3.5 Workmanship. Workmanship shall be first class throughout. The jars and the caps shall be free from defects which may detract from their appearance or may impair their serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

4.1.2 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual and auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.2.1 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection.
b. Quality conformance inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:16Z
Check the source to verify that this is the current version before use.

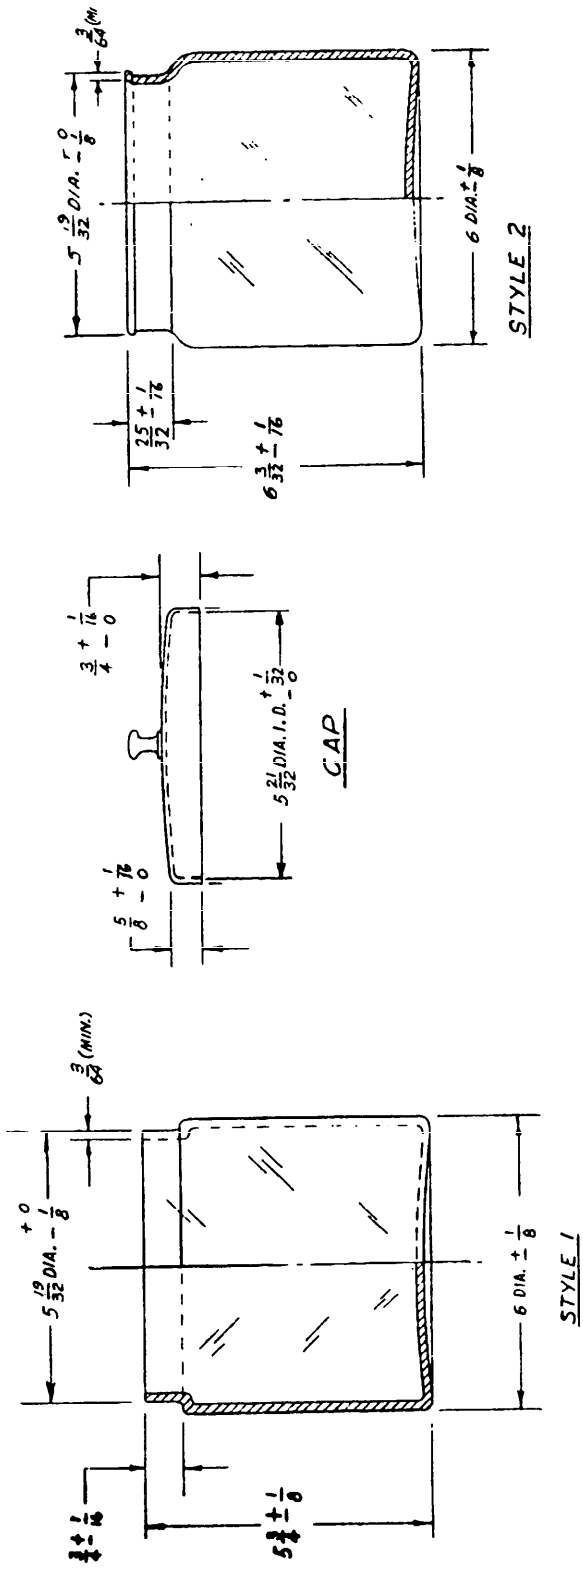


FIGURE 1. Jar and cap.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:16Z
Check the source to verify that this is the current version before use.

* 4.1.2.1.1 First article inspection. First article inspection shall be performed on the jars when a first article sample is required (see 3.1). This inspection shall include examination of 4.3 and tests of 4.4.

* 4.1.2.1.2 Quality conformance inspection. Quality conformance inspection shall include the examination of 4.3 and tests of 4.4.

4.1.3 Certificates of quality. Certificates of quality, supplied by the manufacturer of the materials may be furnished in lieu of actual performance of such testing by the contractor, provided lot identity has been maintained and can be demonstrated to the Government. The certificate shall include the name of the contractor, the contract number, the name of the manufacturer or supplier, the NSN, the Item Identification, the name of the component/ material, the lot number, the lot size, the sample size, the date of testing, the test method, individual test results, and the specification requirements.

* 4.2 Inspection lot.

4.2.1 Raw materials. An inspection lot for raw material inspection shall be all material produced under the same conditions and controlled to the degree that uniformity of product within the designated lot can be assured. Lot identification of the raw material by the manufacturer is one method of control, as cited above, which is considered acceptable.

4.2.2 End product. An inspection lot for inspection of end product shall consist of all jars of the same type produced under essentially the same conditions and offered for inspection at one time.

* 4.3 Sampling.

4.3.1 For examination. Sampling for examination shall be conducted in accordance with MIL-STD-105, and table I. The unit of product for sampling purposes shall be the surgical dressing jar.

TABLE I. Sampling for examination

	Inspection level	AQL (defects per hundred units)
For visual examination		
Major defects	II	1.0
Total defects (Major and Minor combined)	II	4.0
For dimensional examination	S-1	2.5

4.3.2 For tests. Sampling for tests shall be conducted in accordance with MIL-STD-105 and table II. The unit of product for sampling purposes shall be the surgical dressing jar.

Source: https://assist.dla.mil -- Downloaded: 202610-18T09:16Z
Check the source to verify that this is the current version before use.

TABLE II. Sampling for tests

Component (Unit of product)	Characteristic	Require-ment	Test procedure	Inspection level	AQL
Jar	Chemical composition Strain	3.2.2 3.4	4.4.1 4.4.2	(see 4.3.3) S-2	1/ 2.5

1/ Acceptance number shall be zero

4.3.3 Raw materials. Four ounces of each lot of each metal used in the manufacture of the jars shall be selected for chemical analysis.

4.4 Examination. The jars shall be examined to determine compliance with all requirements contained in this specification.

4.4.1 Classification of defects. Examination shall be conducted in accordance with the classification of defects listed in table III. Examination shall not be restricted to the classified possible defects listed below.

TABLE III. Classification of defects

Catagories	Defects
Major	
101	Component part not present.
102	Glass jar not free of sharp edges.
103	Glass jar not free of chipping.
104	Glass jar not free of cracks.
105	Glass jar not free of protrusions.
106	Glass jar top and bottom not free of rocking when placed on a flat surface.
107	Cap not free of sharp edges.
108	Cap not free of dents and deformity.
Minor	
201	Glass jar not free of bubbles.
202	Glass jar not free of stones and striae.
203	Glass jar not free of scratches.
204	Cap not free of pits and burs.
205	Cap not free of scratches (see 3.3.3).

Source: https://assist.dla.mil -- Downloaded: 202640-18T09:16Z
Check the source to verify that this is the currenversion before use.

4.3.2 Dimensional examination. The units shall be examined for defects in dimensions. Any dimension not within the tolerances specified herein shall be classified as a defect.

* 4.3.3 Packaging inspection. The inspection of the unit package, packing and marking for shipment and storage shall be in accordance with quality assurance provisions of the applicable container specification and marking requirements of MIL-STD-129.

4.4 Tests. Tests shall be conducted, as necessary, to determine compliance with specification requirements.

4.4.1 Chemical composition. Tests for chemical analysis shall be conducted, in accordance with method 111 or 112 of FED-TEST METHOD STD-151.

4.4.2 Strain. Ring strain in the glass shall be not greater than temper No.1 when tested as specified in ASTM-C148. Longitudinal strain, if present, shall be faint and highly diffused.

* 5. PACKAGING

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Unit of issue. One jar constitutes a unit of issue.

5.1.2 Level A. Each jar with cap in place shall be clean, dry and wrapped in tissue paper and packaged in a box conforming to PPP-B-566 or PPP-B-676. Closure of the box shall be as specified in the appendix of the applicable box specification.

5.1.3 Level C. Each jar shall be clean, dry and packaged in a manner that will afford adequate protection against corrosion, deterioration and physical damage during shipment form the supply source to the first receiving activity.

5.2 Packing. Packing shall be level A, B or C, as specified (see 6.3).

5.2.1 Level A. Twelve unit packages containing jars of one style only shall be packaged in a shipping container designed for a type 2 load and conforming to PPP-B-636, class weather-resistant. Closure, strapping and waterproofing shall be as specified in the appendix of the box specification.

5.2.2 Level B. Twelve unit packages containing jars of one style only shall be packed in a shipping container designed for a type 2 load and conforming to PPP-B-636, class domestic. Closure shall be as specified in the appendix of the box specification.

Source: https://assist.dla.mil -- Downloaded: 202610-18T09:16Z
Check the source to verify that this is the currentversion before use.

5.2.3 Level C. The packaged jars shall be packed in shipping containers in a manner that will afford adequate protection against damage during direct shipment form the supply source to the first receiving activity. These packs shall conform to the carrier's rules and regulations.

5.3 Marking. Unit packages and shipping containers shall be marked as specified in MIL-STD-129.

6. NOTES

6.1 Intended use. Item is intended for use in Military medical facilities.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents.

a. Title, number and date of this specification.
b. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
c. When a first article is required (see 3.1, 4.1.2.1 and 6.3).

6.3 First article. When a first article is required, it shall be tested and approved under the appropriate provisions of the Armed Services Procurement Regulations. The contract or purchase order specifies the quantity, procedure for delivery and other specific instructions for inspection and approval of the first article.

6.4 This specification covers the following item appearing in the Federal Supply Catalog:

National Stock Number	Item Identification
6530-00-782-8100	JAR, SURGICAL, DRESSING

6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army-MD
Navy-MS
Air Force-03

Preparing activity:
DLA-DM

Project No. 6530-1450

Review activity:
DoD-MB

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:16Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

JAR, SURGICAL DRESSING - MIL-J-16643C

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:16Z
Check the source to verify that this is the current version before use.

FOLD

DEFENSE PERSONNEL SUPPORT CENTER
2800 SOUTH 20TH STREET
PHILADELPHIA, PA 19101

POSTAGE AND FEES PAID

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

DEFENSE PERSONNEL SUPPORT CENTER
DIRECTORATE OF MEDICAL MATERIEL, CODE ATT
2800 SOUTH 20TH STREET
PHILADELPHIA, PA 19101

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:16Z
Check the source to verify that this is the current version before use.