MIL-L-16727D(AS)

23 February 1968

SUPERSEDING
MIL-L-16727C (NORD)
12 January 1955

# MILITARY SPECIFICATION
# LINK, AMMUNITION, 20mm, MARK 2
# (FOR 20mm MARK 12 A/C GUNS)

This specification has been approved by
the Naval Air Systems Command
Department of the Navy

## 1. SCOPE

1.1 This specification covers the 20mm Ammunition Link MARK 2 MODs 1, an 2, herein after referred to as linf. The nomenclature used in this specification is shown in Figure 1.

## 2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on the date of invitation for bids or request for proposal, form a part of the specification to the extent specifird herein.

SPECIFICATIONS

Federal

| | |
|---|---|
| VV-L-800 | Lubricating Oil, General Purpose, Preservative, (Water-Displacing, Low Temperature) |

Military

| | |
|---|---|
| MIL-P-8585 | Primer; Zinc-Chromate, for Aircraft Use |

STANDARDS

Federal

Federal Test Method Metals; Teat Methods.
Standard No. 151

FSC 1305

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:20Z
Check the source to verify that this is the current version before use.

Military

| | |
|---|---|
| MIL-STD-105 | Sampling Procedures and Tables for Inspection by Attributes. |
| MIL-STD-129 | Marking for Shipment and Storage |

PUBLICATIONS

| | |
|---|---|
| Bureau of Naval Weapons OP 1866 | 20mm Aircraft Gun, MARK 12 MODs 0, 2, and 3, Description, Operation and Maintenance. |

DRAWINGS

| | |
|---|---|
| LD 256043 | 20mm Ammunition Link, MARK 2 MOD 1 |
| LD 288383 | 20mm Link Packaging for 20mm Link MARK 2 MOD 1. |
| LD 415250 | Index to Lists of Inspection Gages for MARK 2 MOD 1 Link. |
| LD 288830 | 20mm Ammunition Link MARK 2 MOD 2 |
| LD 256010 | 20mm Link Packaging For 20mm Link MARK 2 MOD 2 |
| LD 414100 | Index to Lists of Inspection Gages For MARK 2 MOD 2 Link. |

(Copies of documents required by contractors in connection with specific procurement functions should be obtained from the procuring agency, or as directed by the contracting officer).

3. REQUIREMENTS

3.1 Preproduction lot. Unless otherwise specified in the contract or order, a preproduction lot of links shall be manufactured using the methods and procedures proposed for the production. The preproduction lot shall be tested as specified in Section 4 herein and is for the purpose of determining that, prior to starting production, the contractor's production methods are capable of yielding items that comply with the technical requirements of the contract.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:20Z
Check the source to verify that this is the current version before use.

3,2 Compliance with documents. Unless otherwise specified, the links shall be in accordance with the requirements specified herein and in the applicable documents listed in Section 2.

3.3 Materials. Unless otherwise specified, the materials used in the manufacture of the links shall conform to the material specifications listed in the applicable drawings (See Section 2).

3.4 Design. The links shall conform with the design requirements specified by the applicable drawings and this specification (See Section 2).

3.5 Finish.

3.5,1 Burrs. All burrs should be removed from the links. Cutting, stamping, and forming operations shall be performed in such a manner that all burrs which may be formed will be directed toward the outside of the links. No burrs shall be permitted in areas delineated by the applicable drawings to be free from burrs (See Section 2).

3.5,2 Protective coating, Subsequent to appropriate hardness treatment, links shall receive the protective coating specified by the applicable drawings. The MARK 2 MOD 1 links shall be locally painted, prior to rust preventive coating, with one coat of zinc chromate primer Specification MIL-P-8585 (See Section 2).

3.5.2.1 Residual Coating. The residual coating of rust preventative compound shall not exceed 75 milligrams per round retainer or 25 milligrams per connecting loop.

3.6 Environmental Requirements.

3.6.1 Salt Spray Resistance. Each link component tested in accordance with 4.6.1.2 shall be visually examined for evidence of rust. Each round retainer shall show no more than six easily discernible rust spots, each measuring not more than 1/8 inch in diameter or equivalent area. Each connecting loop shall show not more than three easily discernible rust spots, each measuring not more than 1/8 inch in diameter or equivalent area. Rust staining, rust drainage, and edge rust shall not be considered when measuring the area of rust spots.

3.6.2 Temperature extremes. The links shall comply with the requirements of 3.8 at any temperature between minus 65 degrees Fahrenheit (F) and plus 165 degrees F.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:20Z
Check the source to verify that this is the current version before use.

3.7 Construction. The links shall meet the requirements specified in 3.7.1, 3.7,2, 3.7.3, 3.7.4, and 3.7.5.

3.7.1 Stowage. When tested in accordance with 4.6.1.3.1, the closed sides of the links In one layer shall pass over the closed sides of the links in the next layer without hang-up or interference between the projecting surfaces of the links in the two layers, No hang-up or interference shall exist when the open sides pass over each other

3.7.2 Extraction Resistance. Links shall meet the following requirements for extraction resistance when tested in accordance with 4,6.1.3.2: (a) A fall of not more than 22 inches shall fully extract the gage bar from the round retainer of the link. (b) A fall of 14 inches shall fail to fully or partially extract the gage bar from the round retainer. (c) A gradually applied load of 80 lbs. shall not fully extract the gage bar from the round retainer.

3.7.3 Pulling strength. When tested in accordance with 4.6.1.3.3, the links shall withstand a load of 250 pounds without fracture and without permanent increase in belt pitch in excess of 0.010 inch.

3.7.4 Deformation of bridges. When tested in accordance with 4.6.1,3.4, the links shall withstand a load of 31 pounds without fracture and without exceeding permanent set of 0.012 inch measured at the inner forward edge of the round retainer.

3.7.5 Spring Tension of Connecting Loop. Links when tested in accordance with 4.6.1.3.5, using a 12 pound load, shall retain sufficient tension in the joint so that the longitudinal axis of the round retainer does not rotate more than 2° from its original position prior to application of the load.

3.8 Performance characteristics,

3.8.1 Belt feeding during firing. Belted links, containing ammunition, shall properly feed into the feed mechanism at the prescribed rate of fire, The belts, when being fed to the feed mechanism, shall be properly withdrawn from the ammunition magazines and passed through the feed chutes without hang-up, belt separation, binding, or link breakage (See 4.6.2).

3.8.2 Link stripping and ejection during firing. The links shall permit proper stripping of the rounds by the feed mechanism.



Source: https://assist.dla.mil -- Downloaded: 202610-18T09:20Z
Check the source to verify that this is the current version before use.

Subsequent to stripping, the links shall pass through the link ejection chutes without hang-up, catching, or binding (See 4.6.2).

3.9 Government-furnished property. Ammunition boxes, LD 165132, in quantities specified in the. contract or order, are required to comply with the packaging requirements of Section 5.

3.10 Government-loaned property. When requested by the contractor, the Government will furnish, on loan, 20mm MARK 103, MOD O dummy rounds of ammunition for use in conducting the tests specified herein. The contractor shall be responsible for any damage to or loss of Government loaned property.

3.11 Packaging, packing, and marking. Packaging, packing, and marking of the links shall conform to the requirements of Section 5 of this specification.

3.12 Workmanship. Links shall be uniform in quality and temper, and shall be free from laminated metal (complete separation of the metal at some point), excessive scale, scraps, splits, cracks, seams, and other defects. The quality of workmanship shall assure conformance to all requirements of this specification and the applicable documents listed in Section 2. The standards of workmanship exhibited in any approved preproduction sample , subject to any qualification stated in the Government notice of approval, shall be determinative of the requirements of the contract relative to workmanship insofar as not specifically covered by applicable specifications.

## 4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for insertion. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspections specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in this specification where. such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Classification of inspection. Inspection and testing of the links shall be classified as follows:

(a) Preproduction inspection

(b) Quality conformance inspection



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:20Z
Check the source to verify that this is the current version before use.

4.3 Lot. A lot shall consist of all links manufactured by the same process at the same plant locations, and submitted for Government acceptance at the same time. Unless otherwise specified in the contract or order, the lot size shall consist of 25,000 MARK 2 MOD 2 links. Lot size for the MARK 2 MOD 1 link shall consist of 10,000 links or as directed by the contracting officer.

4.4 Sampling.

4.4.1 Preproduction sample. A preproduction sample of 152 MARK 2 MOD 1 links, and 290 MARK 2 MOD 2 links, manufactured in accordance with 3.1, shall be subjected to the following tests and inspections:

| Examination or Test | Requirement Paragraph | Method Paragraph | No. of Sample Units to be Inspected | No. of Defective Allowed |
|---|---|---|---|---|
| Group I | | | | |
| Material, Design, and Workmanship | 3.2,3.3,3.4, 3.12 | 4,6.1.1 | 20 " | 0 |
| Group II | | | | |
| Salt Spray | 3.6,1 | 4.6.1.2 | 20 | 0 |
| Group III | | | | |
| Residual Rust Preventive Coating | 3.5.2.1 | 4.6.1.1 | 20 | 0 |
| Group IV | | | | |
| Stowage | 3.7.1 | 4.6.1.3.1 | 20 | 0 |
| Group V | | | | |
| Extractor Resistance | 3.7.2 | 4.6.1.3.2 | 20 | 0 |
| Group VI | | | | |
| Pulling Strength | 3.7.3 | 4.6.1.3.3 | 20 | 0 |
| Group VII | | | | |
| Deformation of Bridge | 3.7.4 | 4.6.1.3,4 | 20 | 0 |
| Group VIII | | | | |
| Spring Tension of Connecting Loop | 3.7.5 | 4.6.1.3.5 | 20 | 0 |
| Group IX | | | | |
| Performance Characteristics | 3.8 | 4.6.2.3 | 12 MARX 2 MOD 1<br>150 MARK 2 MOD 2 | See 4.6.2 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:20Z
Check the source to verify that this is the current version before use.

Acceptance of the preproduction sample shall be based on no defects. Any production by the supplier prior to approval of the preproduction lot shall be at the supplier's risk.

4.4.2 Quality conformance inspection sampling, The sampling plans and procedures set forth in Standard MIL-STD-105 shall be used in the determination of acceptability of the links tested and inspected as specified in 4.5 and 4,6.

4.5 Examination.

4.5.1 Components. Prior to acceptance of the links, it shall be ascertained that all components procured under separate documents have been inspected, tested, and accepted in accordance with their respective documents.

4.6 Tests.

4.6.1 Acceptance tests.

4.6.1.1 Visual and mechanical inspection. Link samples selected in accordance with 4.4.2 shall be tested for conformance to 3.2, 3,3, 3.4, 3.5, 3.11, and 3.12. When applicable, a link acting under its own weight shall be able to pivot about or drop out of a go gage and shall not be able to pivot about or drop out of a no go gage. Lot quality shall be judged in accordance with Standard MIL-STD-105, General Inspection Level II, Acceptable Quality Level (AQL) 1.0 percent defective for major defects, plus 2.5 percent defective for minor defects. Classification of defects for the MARK 2 MOD 1 link shall be in accordance with NAVORD OCD 1212380. Classification of defects for the MARK 2 MOD 2 link shall be in accordance with NAVORD OCD 1252961.

4.6,1.2 Salt Spray resistance test. After the links have received the protective coating specified in 3.5.2, samples shall be selected in accordance with MIL-STD-105, Inspection level S-4, acceptance number zero, and subjected to the test of Federal Test Method Standard No. 151, Method 811.1, for 48 hours. The links shall meet the require-ments of 3.6.1. The salt spray test shall be conducted on unassembled link components. Test links shall not be reused for other tests, nor shall they be delivered to the Government as units of production.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:20Z
Check the source to verify that this is the current version before use.

4.6. 1.3 Link samples shall be-selected in accordance with MIL-STD-105, Inspection level S-4, for each test specified in 4.6.1.3.1, 4.6.1.3.2, 4.6.1.3.3, 4.6.1.3.4 and 4.6.1.3.5. Lot disposition shall be as specified in 4.6.3.1. Each link shall be used for only one test, except links used in Group IV Test under 4.4.1 may be used for subsequent tests. Tested links shall not be delivered to the Government as units of production.

4.6.1.3.1 Stowage. MARK 2 MOD 2 links shall be tested for stowage requirements of 3.7.1 by use of a minimum belt of twenty rounds of 20mm MARK 103 MOD O dummy ammunition placed on a level surface with the closed sides of the links against the level surface, and the belt being fanned to its maximum projectile-end-in free-state position. Linked rounds at one end of the belt shall be raised over adjacent linked rounds, and pulled by hand across and in contact with the dummy rounds and links in the rest of the belt. Repeat the above procedure with the open sides of the links facing the level surface.

4.6.1.3.2 Extraction resistance. Links shall be tested for required extraction resistance specified in 3.7.2 by use of a hardened and ground steel bar or plug. The bar shall have the same dimensions as the basic cartridge case (See Figure 2), and shall support a pendant rod at right angles to the axis of the bar at the mid point of the stripping section of the round retainer. The rod shall be provided with a freely sliding drop block weighing two pounds and a stop at the lower end of the rod so positioned as to stop the block after falling freely through the required distance. Total weight of the bar, pendant rod, and stop, exclusive of the drop block, shall be 1.50 ± .02 pounds. The bar shall be inserted in the round retainer of the link so that the rod hangs below the center of width of the round retainer. The link shall be supported in a horizontal position by means of the stripping bridge of the round retainer being tested and also by means of the T-slot of the connecting loop. The drop block shall be permitted to fall freely through the prescribed distance and strike the stop. Full extraction shall be when the gage bar drops free from the round retainer. Partial extraction shall be when either end of the round retainer snaps beyond its mating diameter on the gage bar and does not return to its original position, When testing the MARK 2 MOD 1 link, each round retainer shall be subjected to the above procedure.

4,6. 1.3.3 Pulling strength. Links shall be tested for required pulling strength specified in 3.7.3 by assembling the link on two parellel studs having the same dimensions as the basic cartridge case (See Figure 2). When testing the MARK 2 MOD 2 links, one extra MARK 2 MOD 2 link shall be assembled on the stud holding the connecting



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:20Z
Check the source to verify that this is the current version before use.

loop under test. This extra link shall be the only means of holding the connecting loop of the test link on the stud. The studs shall then be forced apart laterally to produce the pull specified in 3.7.3, the load being applied at approximately the center line of the connecting loop, The links shall meet the requirements of 3.7.3.

4.6. 1.3.4 Deformation of bridge. Links shall be tested for bridge deformation by inserting a plug, having the same dimensions as the base end of the basic cartridge case (See Figure 2), in the rear end of the round retainer with the forward wall of the plug flush with the rear of the stripping bridge. The plug and round retainer (open side up) shall be clamped in a restraining device and a load imposed at the center of the groove near the forward edge. of the round retainer pulling away from the center line of the link so that the stripping bridge will be bent with the least load. When testing the MARK 2 MOD 1 link, separate tests shall be performed on each round retainer in the unassembled condition. Links shall meet the requirements of 3.7.4.

4.6.1.3.5 Spring tension of connecting loop. Test for tension for the MARK 2 MOD 2 links shall be at the joint made by the two hooks of the connecting loop gripping the round retainer. The connecting loop shall be supported, open side down, in a fixture , with the axis of both members in a horizontal plane and the round retainer unsupported by the fixture. A load shall be applied vertically at the edge of the opening in the T-slot of the connecting loop nearest the joint being tested. The above procedure shall be used when testing the MARK 2 MOD 1 links, except with the axis of the round retainers in a horizontal plane so that the fixture shall not support the round retainer gripped by the two hooks of the connecting loop. The links shall meet the require-rents of 3,7.5.

4.6.2 Functioning tests.

4.6.2.1 Preproduction sample., From each preproduction lot, 12 MARK 2 MOD 1 links and 150 MARK 2 MOD 2 links shall be delivered to a Naval test activity (as specified in the contract or order) for functioning tests.

4.6.2.2 Production sample. From each production lot, 12 MARK 2 MOD 1 links and 150 MARK 2 MOD 2 links shall be delivered to a Naval test activity (as specified in the contract or order) for functioning tests. These links shall be in addition to the quantity specified in the contract or order, and shall be furnished at no cost to the Government.



Source: https://assist.dla.mil -- Downloaded: 202610-18T09:20Z
Check the source to verify that this is the current version before use.

4.6.2.3 Test firing requirements. The test firing shall be conducted with the following:

(a) A test mount with a minimum rigidity of 250,000 pounds per inch.

(b) One group of belted links to be cold conditioned at minus 65 degrees F for at least two hours immediately prior to test firing; a second group of belted links from, the same lot, to be hot conditioned at plus 165 degrees F for at least two hours immediately prior to test firing, and a third group of belted links, from the same lot, to be conditioned at plus 70 degrees F.

(c) Use of MARK 100 series rounds of ammunition.

(d) Use of the MARK 12 MOD O gun system equipped with the MARK 7 MOD 2 feed mechanism or the MARK 12 MOD 3 gun system equipped with the MARK 9 MODS 4 and 5 feed mechanisms.

(e) Rate of fire to be between 925 to 1075 rounds per minute .

(f) Ammunition and links to be lightly oiled with lubricating oil conforming with VV-L-800.

(g) Use of link ejection chutes comparable with those in current Navy aircraft having MARK 12 gun installations.

(h) Fifty round bursts shall have two momentary interruptions.

(i) The flexible feed chute shall be unsupported for the 12 inches nearest the feed mechanism. The supported part of the flexible feed chute shall be on the same level as the entrance to the feed mechanism. There shall be enough slack in the feed chute so that it may be raised at the middle of the unsupported length to a height of 4 inches above the lowest point (determined under slight load).

4.6.2.4 MARK 2 MOD 2 link test firing

4.6.2.4.1 Right hand feed. Test fire 150 belted rounds under the following conditions:



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:20Z
Check the source to verify that this is the current version before use.

(a) Fire one group of 50 links conditioned at -65°F.

(b) Fire a second group of 50 links conditioned at ambient temperature (+70°F).

(c) Fire a third group of 50 links conditioned at +165°F.

4.6.2.4.2 Left hand feed. Repeat the tests prescribed in 4.6.2.4.1, reusing the same links, but firing from left hand feed.

4,6.2.4.3 Links conditioned at one temperature shall be reconditioned at that same temperature, and shall not be intermixed with other groups.

4.6.2.4.4 Each link shall be used a total of two times for the tests of 4.6.2.4.1 and 4.6.2.4.2.

4.6.2.5 MARK 2 MOD 1 link test firing.

4,6.2.5,1 Right hand feed. Test fire 30 belted rounds under the following conditions:

(a) Three 10 round belts shall be assembled. Each belt shall consist of two MARK 2 MOD 1 links and six previously accepted MARK 2 MOD 2 links.

(b) Fire one 10 round belt conditioned at -65°F.

(c) Fire a second 10 round belt conditioned at ambient temperature (+70°F).

(d) Fire a third 10 round belt conditioned at +165°F.

4.6.2.5.2 Left hand feed. Repeat the tests prescribed in 4.6,2.5.1, using a new group of MARX 2 MOD 1 links, but firing from left hand feed.

4.6.2.6 When link failures occur which cause a lot to be rejected, testing of that lot shall be terminated. If link breakage or belt separations occur which do not cause rejection of the lot, remove the broken or dislodged links and continue testing (See 4.6.3). Records of link breakages and belt separations shall be kept for each lot.



Source: https://assist.dla.mil -- Downloaded: 202610-18T09:20Z
Check the source to verify that this is the current version before use.

4.6.3 Acceptance criteria.

4.6.3,1 Failure of any links to pass the tests of 4.6.1.3.1, 4.6.1.3.2, 4.6.1.3.3, 4.6.l.3.4, and 4.6.1.3,5 shall be cause for rejection of the lot represented.

4.6.3.2 Lot disposition for the tests of 4.6.2.4 shall be as follows:

step 1. The entire lot shall be rejected if one link breaks , or one belt separation occurs during the first use of the links. If no link breakage or belt separation occurs, then proceed to Step 2.

Step 2. The entire lot shall be rejected if two or more links break, or two or more belt separations occur during the second use of the link. One link breakage and one belt separation in combination will also reject the lot,

4,6.3,2.1 Link breakages and belt separations caused by use of defective testing equipment shall not be counted as failures of the links during the tests prescribed in 4.6.2.

4,7 Waiver provisionapplicable to functioning tests. After five (5) consecutive production lots manufactured by a contractor have successfully passed functioning test requirements and have been accepted for service use, the contracting officer or the test activity shall have the authority to waive functioning tests for subsequent lots produced (maximum of three successive lots) if it is reasonably assured that this reduction in the number of lots tested will not result in loss of quality maintained in the first five lots produced. Should 2 lot fail to pass functioning test during this reduced firing arrangement, firing of every lot shall be resumed until five (5) more consecutive lots have been successfully fired after which the reduced firing tests may be resumed. During the course of the reduced firing plan, the test activity may revert to testing of each or any particular lot as is considered appropriate to guarantee continued quality for service use.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A, or C as specified (See 6.2).

5.1.1 Level A



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:20Z
Check the source to verify that this is the current version before use.

5.1.1.1 Preservation. The supplementary oil finish applied subsequent to phosphate coating, as specified by the applicable drawings, shall serve as the preservative for the links. No additional preservative is required.

5.1.1.2 Unit packaging. Not applicable.

5.1.2 Level C.

5.1.2.1 Preservation. Preservation shall be as specified in 5.1.1.1.

5.1.2.2 Unit packaging. Not applicable.

5,2 Packaging.

5,2.1 Level A.

5,2.1.1 Exterior containers. Links, in numbers specified in the contract or order (See 6.2) shall be packed into containers conforming to drawings listed in LD 288383 for the MARK 2 MOD 1 links, and LD 256010 for the MARK 2 MOD 2 links.

5,2.1.2 Cushioning. The pack shall incorporate sufficient cushioning material, bracing, or other adequate shock absorbing devices to ensure that the links will meet all of the requirements of Section 3.

5.2.2 Level C.

5.2.2.1 Exterior containers. Links, in numbers specified in the contract or order (See 6.2) , shall be packed to afford protection against damage during direct shipment from the supply source to the first receiving activity for immediate use. Shipping containers shall conform to the carrier rules and regulations applicable to the mode of transportation.

5.2.2.2 Cushioning. Cushioning shall be as specified in 5.2.1.2.

5.3 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with Standard MIL-STD-129.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:20Z
Check the source to verify that this is the current version before use.

## 6. NOTES

6.1 Intended use. The links are intended for assembling into 20mm ammunition belts for use with the 20mm aircraft gun MARK 12. Each link consists of one or two round retainers and one connecting loop, joined together so as not to be readily separated. The MARK 2 MOD 1 link is used as an end link; (either leading or trailing) all other links in the belt are MARK 2 MOD 2. The complete belt is capable of being drawn through either a flexible or rigid chuting arrangement which may be twisted and turned into various configurations. The links are capable of being stripped transversely from the round of ammunition by the feed mechanism in such a manner that the belt disintegrates and the links expended through the link ejection chute.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.

(b) Size of preproduction lot if different from 4.4.1,

(c) Facility designated to evaluate the preproduction lot.

(d) Government-furnished property (See 3.9).

(e) Government-loaned property (See 3.10).

(f) Production lot size (See 4.3).

(g) Facility designated to evaluate the production lots.

(h) Procedure for resubmittal of rejected lots.

(i) Preservation, packaging and packing levels.


(j) Purchase order number.

(k) Contract number,


(l) Federal stock number.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:20Z
Check the source to verify that this is the current version before use.

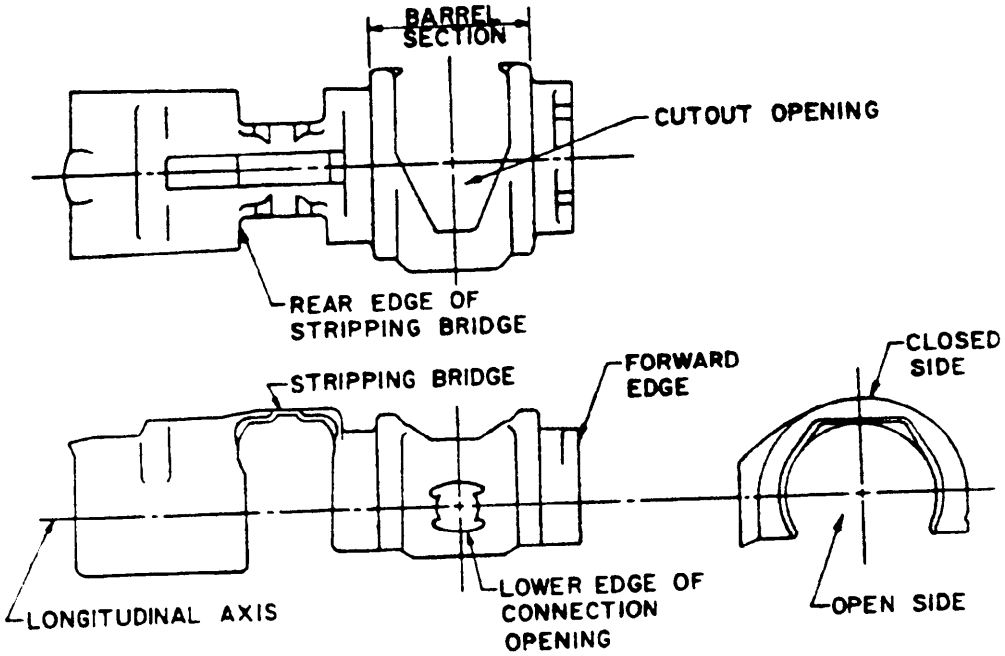


ROUND RETAINER

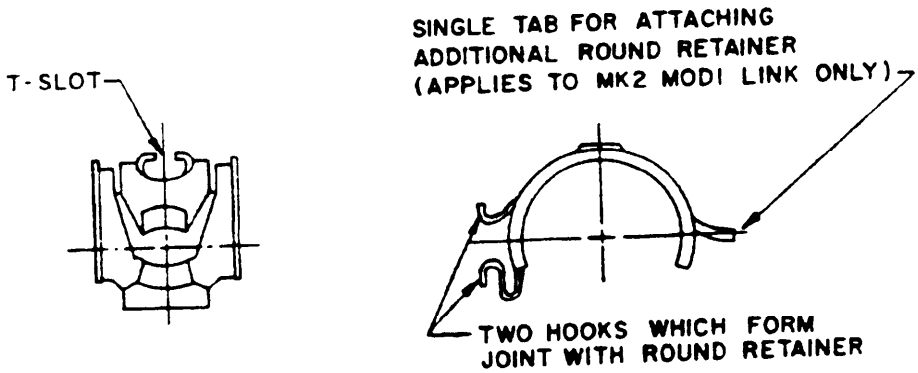


CONNECTING LOOP

FIGURE 1



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:20Z
Check the source to verify that this is the current version before use.

MIL-L-16727D (AS)

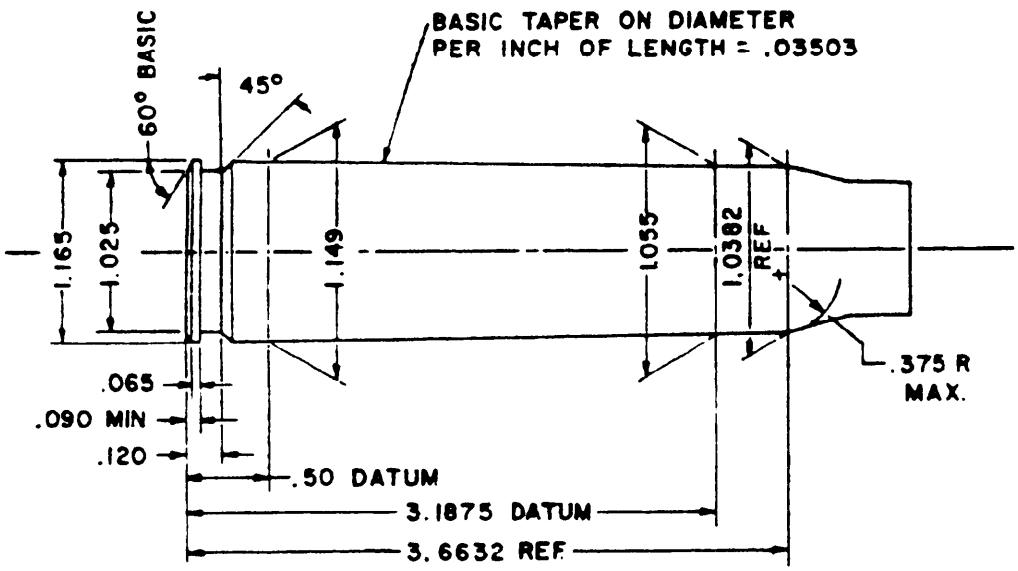



FIGURE 2



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:20Z
Check the source to verify that this is the current version before use.

# SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

**INSTRUCTIONS**

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity (as indicated on reverse hereof).

SPECIFICATION

MIL-L-16727D(AS) LINK, AMMUNITION, 20 MM MK 2 (For 20 MM Mk 12 A/C Guns

| ORGANIZATION (Of submitter) | CITY AND STATE |
|---|---|
| | |

| CONTRACT NO. | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT |
|---|---|---|
| | | $ |

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS (Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)

| SUBMITTED BY (Printed or typed name and activity) | DATE |
|---|---|
| | |

DD, FORM 1 APR 63 1426

C-8878

Source: https://assist.dla.mil -- Downloaded: 202610-18T09:20Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Systems Command
Washington, D.C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

NAVAL AIR SYSTEMS COMMAND (AIR-52021)
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

GPO 303-226/Z 1018

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:20Z
Check the source to verify that this is the current version before use.