[INCH-POUND]
A-A-55563
April 29, 1996


COMMERCIAL ITEM DESCRIPTION

HOLDERS, ELECTRICAL CARD, METAL CARD GUIDE, GENERAL REQUIREMENTS FOR

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies

1 SCOPE This CID covers the general requirements for a family of metal card guides (here after referred to as card holders) intended for use to guide and hold circuit card assemblies into their installed positions Items covered by this CID are intended for all federal agencies applications and environments

2 CLASSIFICATION The CID uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see 7 1) The following part identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor

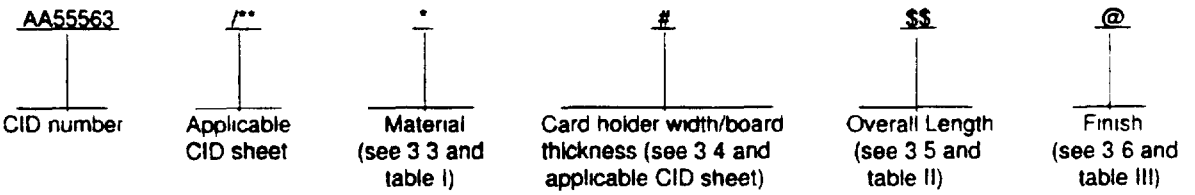

3 SALIENT CHARACTERISTICS

3 1 CID sheet The family of card holders intended for use on circuit card assemblies shall be in accordance with the requirements specified herein and the applicable CID sheet In the event of conflict between this general CID and the applicable CID sheet, the latter shall govern

3 2 Design, construction, and physical dimensions Card holders shall be of the design, construction, and physical dimensions as specified on the applicable CID sheet

3 3 Material type Material type shall be as specified herein and the applicable CID sheet When a definite material is not specified, a material shall be used which will enable the card holders to meet the performance requirements of this CID (see table I and the applicable CID sheet)

TABLE I Card holder material

Material designator	Material type	Applicable specification (or equivalent)	Paragraph
A	Beryllium copper 1/4 hard	ASTM B194, temper TD01	3 3 1
B	Beryllium copper 1/4 heat treated	ASTM B194, temper TH01	3 3 2
C	Steel	ASTM A682 or ASTM A684	3 3 3
D	Stainless steel 1/4 hard	AMS 5517, type 301	3 3 4

Beneficial comments, recommendations additions deletions clarification etc and any data which may improve this document should be sent to Defense Electronics Supply Center, ATTN DESC-ELST, 1507 Wilmington Pike, Dayton, OH 45444-5764, or telephone (513) 296-6278, facsimile (513) 296-6870

AMSC N/A FSC 5998

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 202610-18T09:19Z
Check the source to verify that this is the current version before use.

3 3 1 Beryllium copper 1/4 hard Beryllium copper 1/4 hard shall be as defined in ASTM B194, temper TD01, or equivalent Beryllium copper 1/4 hard material type parts shall include a suffix "A" in the PIN (see section 2, table I, and the applicable CID sheet)

3 3 2 Beryllium copper 1/4 heat treated (after forming) Beryllium copper 1/4 heat treated (after forming) shall be as defined in ASTM B194, temper TH01, or equivalent Beryllium copper 1/4 heat treated material type parts shall include a suffix "B" in the PIN (see section 2, table I, and the CID sheet)

3 3 3 Steel Steel shall be as defined in ASTM A682 or ASTM A684, or equivalent Steel material type parts shall include a suffix 'C" in the PIN (see section 2, table I, and the applicable CID sheet)

3 3 4 Stainless steel 1/4 hard Stainless steel 1/4 hard shall be as defined in AMS 5517 or MIL-S-5059, type 301, or equivalent Stainless steel 1/4 hard material type parts shall include a suffix "D" in the PIN (see section 2, table I, and the applicable CID sheet)

3 4 Card holder width/board thickness Card holder width/board thickness shall be as specified in the applicable CID sheet Card holder width/board thickness designator(s) A, B, C, or D from the applicable CID sheet shall be included in the PIN (see section 2, and the applicable CID sheet)

3 5 Overall length Unless otherwise specified in the applicable CID sheet, overall length shall be as defined in table II Overall length designator from table II shall be included in the PIN (see section 2, table II, and the applicable CID sheet)

TABLE II Card holder overall length

Length designator	Card holder overall length Dimension L Inches (mm)
20	2 0 (50 80)
25	2 5 (63 50)
30	3 0 (76 20)
35	3 5 (88 90)
40	4 0 (101 60)
45	4 5 (114 30)
50	5 0 (127 00)
55	5 5 (139 70)
60	6 0 (152 40)
65	6 5 (165 10)
70	7 0 (177 80)
75	7 5 (190 50)

3 6 Finish Unless otherwise specified in the applicable CID sheet, finish shall be as defined in table III Finish designator from table III shall be included in the PIN (see section 2, table III, and the applicable CID sheet)

3 6 1 Cadmium plate Cadmium plate finish shall be as defined in QQ-P-416, type II, class 2, or equivalent with cadmium plate thickness to be 0003 inch minimum - 0015 inch maximum (0 0076 mm - 0 0381 mm) Cadmium plate finish parts shall include a suffix "A" in the PIN (see section 2, table III, and the applicable CID sheet)

3 6 2 Cadmium plate clear chromate Cadmium plate clear chromate finish shall be as defined in QQ-P-416, type II, class 2, or equivalent with cadmium plate thickness to be 0003 inch minimum - 0015 inch maximum (0 0076 mm - 0 0381 mm) Cadmium plate clear chromate finish parts shall include a suffix "B" in the PIN (see section 2, table III, and the applicable CID sheet)

3 6 3 Copper plate Copper plate finish shall be as defined in MIL-C-14550, class 2, or equivalent Copper plate finish parts shall include a suffix "C" in the PIN (see section 2, table III, and the applicable CID sheet)

3 6 4 Ebonal black plate finish Ebonal black plate finish parts shall include a suffix "D" in the PIN (see section 2 table III and the applicable CID sheet)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:19Z
Check the source to verify that this is the current version before use.

TABLE III Card holder finishes

Finish designator 1/	Finish	Applicable specification (or equivalent)	Paragraph
A	Cadmium	QQ-P-416, type II, class 2	3 6 1
B	Cadmium clear chromate	QQ-P-416, type II, class 2	3 6 2
C	Copper	MIL-C-14550 class 2	3 6 3
D	Ebonal black (copper)	MIL-F-495	3 6 4 1
	Ebonal black (steel)	MIL-C-13924, class 1	3 6 4 2
E	Gold	MIL-G-45204, type I, class 1	3 6 5
F	Nickel	QQ-N-290, class I, grade G, bright	3 6 6
G	Passivated steel	QQ-P-35, type VI or MIL-S-5002	3 6 7
H	Silver	QQ-S-365, type III, grade A	3 6 8
I	Zinc	ASTM B633, Fe/Zn 8	3 6 9
J	Zinc yellow chromate	ASTM B633, Fe/Zn 8	3 6 10
K	No finish		3 6 11

1/ Finish designator "D" is use for Ebonal black (copper or steel) and depends upon the basic base material selected how that finish will be applied (see also the applicable CID sheet)

3 6 4 1 Ebonal black (Copper) plate Ebonal black copper plate finish for 1/4 hard beryllium copper and 1/4 heat treated beryllium copper shall be as defined in MIL-F-495, or equivalent

3 6 4 2 Ebonal black (Steel) plate Ebonal black steel plate finish for steel and 1/4 hard steel shall be as defined in MIL-C-13924, class 1, or equivalent

3 6 5 Gold plate Gold plate finish shall be as defined in MIL-G-45204, type I, class 1, or equivalent Gold plate finish parts shall include a suffix "E" in the PIN (see section 2, table III, and the applicable CID sheet)

3 6 6 Nickel plate Nickel plate finish shall be as defined in QQ-N-290, class 1, grade G, bright, or equivalent Nickel plate finish parts shall include a suffix "F" in the PIN (see section 2, table III, and the applicable CID sheet)

3 6 7 Passivated steel plate Passivated steel plate finish shall be as defined in QQ-P-35, type VI, or MIL-S-5002, or equivalent Passivated steel plate finish parts shall include a suffix "G" in the PIN (see section 2, table III, and the applicable CID sheet)

3 6 8 Silver plate Silver plate finish shall be as defined in QQ-S-365, type III, grade A, or equivalent Silver plate finish parts shall include a suffix "H" in the PIN (see section 2, table III, and the applicable CID sheet)

3 6 9 Zinc plate Zinc plate finish shall be as defined in ASTM B633, Fe/Zn 8 Zinc plate finish parts shall include the suffix "I" in the PIN (see section 2, table III, and the applicable CID sheet)

3 6 10 Zinc yellow chromate plate Zinc yellow chromate plate finish shall be as defined in ASTM B633, Fe/Zn 8 Zinc yellow chromate plate finish parts shall include the suffix "J" in the PIN (see section 2, table III, and the applicable CID sheet)

3 6 11 No finish No finish option parts shall include the suffix "K" in the PIN (see section 2, table III, and the applicable CID sheet)

3 7 Marking Card holders supplied to this CID shall be marked with the manufacturer's (MFG) standard commercial PIN

3 8 Workmanship Card holders shall be representative of controlled industrial techniques Surfaces shall be free of pits in plating voids die marks plating scratches there shall be no base metal shavings, corrosion or other defects which could affect the life, serviceability, or performance of the card holders Identification grooves on surface of parts are acceptable

4 REGULATORY REQUIREMENTS This section is not applicable to this CID

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:19Z
Check the source to verify that this is the current version before use.

5 QUALITY ASSURANCE PROVISIONS

5 1 Contractor certification The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this CID and of the applicable individual CID requirements, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices, and is the same product offered for sale in the commercial marketplace The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract

5 2 Market acceptability The following market acceptability criteria are necessary to document the quality of the product to be provided under this CID

a The company producing the item must have been producing similar products meeting the requirements of this CID for a period of at least 2 years for the government or commercial users

6 PACKAGING

6 1 Preservation, packing, and marking Preservation, packing, and marking shall be as specified in the contract or order

7 NOTES This section contains relevant information which is useful to buyers, users, and suppliers in the process of acquiring the item, but is not mandatory

7 1 PIN The PIN should be used for Government purposes to buy commercial products to this CID See section 2 for PIN format example

7 2 CAGE code For ordering purposes, inventory control, and submission of these card holders to DESC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used

7 3 Source of documents

7 3 1 Government documents Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Defense Printing Service Detachment Office, Building 4D (Customer Service), 700 Robbins Avenue, Philadelphia, PA 19111-5094

SPECIFICATION

FEDERAL

QQ-P-35	-	Passivation Treatments for Corrosion-Resistant Steel
QQ-N-290	-	Nickel Plating (Electrodeposited)
QQ-S-365	-	Silver Plating, Electrodeposited, General Specification For
QQ-P-416	-	Plating, Cadmium (Electrodeposited

DEPARTMENT OF DEFENSE

MIL-F-495	-	Finish, Chemical, Black, For Copper Alloys
MIL-S-5002	-	Surface Treatments And Inorganic Coatings For Metal Surfaces of Weapons Systems
MIL-C-13924	-	Coating, Oxide, Black For Ferrous Metals
MIL-C-14550	-	Copper Plating (Electrodeposited)
MIL-G-45204		Gold Plating, Electrode Deposited

7 4 2 Non-Government publications

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM B194	-	Copper-Beryllium Alloy Plate, Sheet, Strip And Rolled Bar
ASTM B633		Zinc On Iron And Steel, Electrodeposited Coatings Of
ASTM A682	-	Standard Specification for Steel, Strip, High Carbon, Cold-Rolled
ASTM A684		Standard Specification for Steel, Strip, High Carbon, Spring Quality, General Requirements for

(Application for copies should be addressed to the American Society for Testing and Materials 1916 Race Street Philadelphia PA 19103 1187)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:19Z
Check the source to verify that this is the current version before use.

AEROSPACE MATERIAL SPECIFICATION (AMS)

AMS 5517	Steel Corrosion Resistant, Sheet and Strip, 18Cr - 8Ni (SAE 30301) Cold Rolled, 125 ksi (862 MPa) Tensile Strength

(Application for copies should be addressed to the Society of Automotive Engineers (SAE), 400 Commonwealth Drive, Warrendale, PA 15096-0001)

7 5 Ordering data The contract or order should specify the following

a CID sheet number, revision, and CID PIN

b Quality assurance provisions

c If a bid sample is required

d Packaging requirements, including pack quantity

7 6 Government users To acquire information on obtaining these card holders from the Government inventory system, contact Defense Electronics Supply Center, ATTN DESC-EOA, 1507 Wilmington Pike, Dayton, OH 45444-5518, or telephone (513)296-8483

7 7 Comments Comments on this CID should be directed to Defense Electronics Supply Center, 1507 Wilmington Pike, ATTN DESC-ELST Dayton OH 45444-5764 or by telephone (513) 296-6278 facsimile (513)296-6870

CIVIL AGENCY COORDINATING ACTIVITY

GSA - 7FXE

PREPARING ACTIVITY

DLA - ES

Project 5998-D062

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:19Z
Check the source to verify that this is the current version before use.