MIL-P-16790B(SHIPS)
28 October 1966
SUPERSEDING
MIL-P-16790A(SHIPS)
15 July 1955
(See 6.4)

MILITARY SPECIFICATION

PUBLIC ADDRESS SET, TYPE AN/UIQ-7

1. SCOPE

1.1 This specification covers a portable public address set consisting of an automatic record player, a microphone, loudspeakers and associated amplifiers. This equipment is intended for use as a public address system and for reproducing phonograph records at speeds of 16-2/3, 33-1/3, 45, and 78 revolutions per minute (r.p.m.).

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-J-641 - Jacks, Telephone, General Specification for.
MIL-P-642 - Plugs, Telephone.
MIL-I-983 - Interior Communication Equipment, Naval Shipboard, Basic Design Requirements for.
MIL-E-17555 - Electronic and Electrical Equipment and Associated Repair Parts, Preparation for Delivery of.

STANDARDS

MILITARY

MIL-STD-275 - Printed Wiring for Electronic Equipment.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

OFFICIAL CLASSIFICATION COMMITTEE

Uniform Freight Classification Rating, Rules, and Regulations.

(Application for copies should be addressed to Official Classification Committee, 1 Park Avenue at 33rd Street, New York, New York 10016.)

ELECTRONIC INDUSTRIES ASSOCIATION (EIA)

Standard RS-238-A - Phonograph Stylus Tips.

(Application for copies should be addressed to Electronic Industries Association, 2001 Eye Street, N.W., Washington, D.C., 20036.)

FSC 5830

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:22Z
Check the source to verify that this is the current version before use.

NATIONAL ASSOCIATION OF BROADCASTERS (NAB)
Standard for Phonograph Disc Recordings.

(Application for copies should be addressed to the National Association of Broadcasters, 1771 N Street, N.W., Washington, D.C. 20036.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Preproduction sample.- Prior to beginning production, a sample shall be tested as specified in 4.2 (see 6.3).

3.2 Description.- The public address set shall be a portable unit consisting of a four speed record player turntable and record changing mechanism, a balanced pickup arm, a stereo cartridge with stylus, two amplifiers, two loudspeakers, a microphone, and enclosure complete with connections. The public address set shall be capable of reproducing monophonic and stereophonic records as well as provide amplification for microphone signals.

3.3 General features.- The equipment shall be in accordance with the following paragraphs of MIL-I-983 in addition to the requirements specified herein. (Whenever a requirement of MIL-I-983 conflicts with a requirement of this specification, the requirement of this specification shall govern.)

General requirements
Definitions
Materials, general
Substitution of (equal or superior) materials or parts
Fungus-inert materials
Flammable materials
Arc-resistant materials
Toxic materials
Wood
Metals
Aluminum
Magnesium
Ferrous alloys
Nonferrous material (except aluminum)
Zinc
Springs (material)
Other metals
Plastics
Ceramics
Impregnating, embedding and encapsulating compounds
Lubricants and lubrication
Painting
Protection against corrosion
Bolts, machine screws, studs and nuts
Parts - mechanical
Dials and pointers
Dial sizes
Locking devices
Washers
Bearings
Bearings, ball
Bearings, sleeve-type
Parts - electrical - general
Use of nonstandard parts
Requirements for semiconductor devices (see 3.8.3)
Electron tube or capacitor sockets

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:22Z
Check the source to verify that this is the current version before use.

Capacitors (see 3.8.2)
Variable resistors
Transformers and inductors
Relays
Electrical tapes
Switches
Indicator lights and lampholders
Fuses
Fuseholders and fuse clips
Printed wiring
Enclosures - general (see 3.9.1)
Enclosure - accessibility
Enclosure - mounting (see 3.9.2)
Stiffening grooves
Through bolting
Ventilation
Size (for submarines and surface ships)
Threaded devices
Rounded corners and edges
Internal subassembly protection
Drilled and tapped holes
Structural welding
Shock, vibration and inclination (non-vital)
Features electrical
Overload protection
Primary power supply circuits (see 3.5.1.6)
Power supply tolerances
Safety (personnel hazard)
Shielding and radio frequency noise reduction
Ground potential and grounding
Soldering
Electrical parts mounting
Internal subassembly connection
Electrical connectors
Wiring
Color coding
Electrical insulation
Dielectric strength and insulation resistance clearances
Airborne noise (class A)
Structureborne noise (grade 3)
Drawings - general
Drawings - preliminary
Drawings - working
Schematic diagrams
Wiring diagram
Drawing list
Assembly drawings
Interchangeability and standardization
Manuals (type II)
Repair parts
Repair parts (electronic)
Designation and marking (serial numbers are required) (see 3.14)
Reports
Item names and nomenclature
Workmanship

3.4 Automatic record player.- The automatic record player shall be capable of reproducing a single record either automatically (see 3.4.1.1) or manually (see 3.4.2.3.4) and automatically reproducing any number up to 10 records of 7, 10, and 12 inch diameter at either 16-2/3, 33-1/3, 45, and 78 r.p.m.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:22Z
Check the source to verify that this is the current version before use.

3.4.1 Record changer mechanism.- The record changer mechanism shall be capable of handling any number of records up to 10.

3.4.1.1 Automatic reproduction (single cycle).- When a single record is placed on the record changer spindle (see 3.9.5(d)) and the mode selection switch (see 3.4.2.3) is placed in the "REJECT" position and released, the record changer mechanism shall place the pickup arm at the start of the record. During the reproduction of the record, the changer shall not, in any way affect the freedom of either the lateral or vertical motion of the pickup arm. When the pickup reaches the record's tripping groove and operates the tripping mechanism (see 3.4.1.3), the pickup arm shall be returned to the arm rest position (see 3.4.1.7.1) and the mode selection switch shall go to the "OFF" mode (see 3.4.2.3.1).

3.4.1.2 Automatic reproduction (multiple cycle).- When more than one record is placed on the record changer spindle (see 3.9.5(c)) and the mode selection switch is placed in the "REJECT" position and released, the record changer shall drop the first record onto the turntable and place the pickup at the start of the record. During the reproduction of the first record, the record changer mechanism shall not in any way affect the freedom of either the lateral or vertical motion of the pickup arm. When the pickup reaches the record's tripping grooves and operates the tripping mechanism the pickup arm shall be returned to the arm rest position (see 3.4.1.7.1) and the next record on the changer spindle shall be dropped onto the turntable and the reproduction cycle repeated. When the pickup reaches the tripping grooves of the last record to be reproduced, the pickup arm shall be returned to the arm rest position and the mode selection switch shall go to the "OFF" mode (see 3.4.2.3.1).

3.4.1.3 Trip mechanism force.- When the pickup reaches the tripping grooves of the record, to trip the record changer mechanism the lateral force exerted shall not exceed 1.0 gram when tested in accordance with 4.5.10.

3.4.1.4 Turntable platen.- The record player shall employ a minimum 10 inch diameter turntable with interchangeable centering facilities (see 3.9.5(c) and 3.9.5(d)) for manual and automatic reproduction of records. The turntable platen shall be constructed from a solid nonferrous metal weighing at least 6.5 pounds and shall be covered by a vibration absorbent pad at least 1/8 inch thick. Provision shall be made for locking the turntable to prohibit unintentional removal of the turntable from the drive shaft.

3.4.1.5 Turntable motor.- The turntable motor shall be life lubricated and shall not require any additional lubrication.

3.4.1.6 Drive mechanism.- The turntable drive mechanism shall employ a rim drive system. Drive idlers shall be disengaged from associated driving or driven members when the mode selection switch (see 3.4.2.3) is in the "OFF" position.

3.4.1.7 Pickup arm.- The pickup arm shall be a massed balanced type which will permit continuous operation of the record player under the simultaneous conditions of pitch and roll when tested in accordance with 4.5.20.

3.4.1.7.1 Pickup arm clamp.- A pickup arm clamp shall be provided to positively secure the pickup arm assembly in the arm rest position when the record player is not in use. The automatic record player shall not be damaged if the record changer reproduction cycle is initiated (see 3.4.2.3.3(a)) when the pickup arm is secured by the clamp.

3.4.1.8 Pickup cartridge.- The pickup cartridge shall be a magnetic type stereo cartridge. The pickup cartridge shall have an output voltage level of at least 4.0 millivolts per channel and a nominal impedance of 47k ohms per channel. One channel of the pickup cartridge output shall be connected to the channel A amplifier record player input and the remaining channel of the pickup cartridge output shall be connected to the channel B amplifier record player input. The cartridge holder shall be designed for easy cartridge mounting and shall lock the cartridge rigidly in place to act as an integral part of the pickup arm. The design of the cartridge shall be such that the stylus can be easily replaced. Dropping or skidding on the record surface or turntable pad shall not result in damage to the cartridge or stylus.

3.4.1.9 Pickup cartridge stylus.- The pickup stylus shall have a 0.7 mil (0.0007 inch) tip radius and shall be constructed from a whole diamond. The pickup cartridge stylus shall have a 15 degree vertical tracking angle in accordance with the EIA standard RS-238-A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:22Z
Check the source to verify that this is the current version before use.

3.4.2 Record player controls.-

3.4.2.1 Record size selector switch.- The record player shall be provided with a record size selector switch to select record sizes of 7, 10, and 12 inches when tested in accordance with 4.5.16. The record size selector switch shall be located on the record changer mechanism.

3.4.2.2 Turntable speed control.- The record player shall be provided with a turntable speed control to select turntable speeds of 16-2/3, 33-1/3, 45, and 78 r.p.m ±0.5 percent when tested in accordance with 4.5.11. The turntable speed control shall be marked to indicate the nominal speed of the turntable in r.p.m.

3.4.2.3 Mode selection switch.- A four position mode selection switch shall be provided to place the record player in the REJECT, ON, OFF, and MANUAL modes. The mode switch positions shall be arranged so that it will be impossible to place the mode switch in the "REJECT" position without going through the "ON" position. The mode selection switch positions shall also be arranged so that it will be impossible to place the mode selection switch in the "MANUAL" position without going through the "OFF" position. The mode selection switch shall be located beyond the outer edge of the turntable.

3.4.2.3.1 "OFF" mode.- When the mode selection switch is in the "OFF" position the record player turntable shall not rotate and the record changer mechanism shall not be energized.

3.4.2.3.2 "ON" mode.- When the mode selection switch is in the "ON" position the record player turntable shall rotate at the selected speed and the record changer mechanism shall be energized but not activated.

3.4.2.3.3 "REJECT" mode.- When the mode selection switch is held in the "REJECT" position and released (the lever shall automatically return to the "ON" position when released) the record changer shall be activated to do either of the following:

(a) Initiate the reproduction cycle (see 3.4.1.1 and 3.4.1.2).
(b) Discontinue the reproduction cycle of one record and initiate another reproduction cycle in accordance with 3.4.1.1 and 3.4.1.2.

3.4.2.3.4 "MANUAL" mode.- When the mode selection switch is placed in the "MANUAL" position the record player turntable shall rotate at the selected speed and the record changer mechanism shall not be activated. The "MANUAL" position shall provide reproduction of a single record by manually placing the pickup on the record and manually removing the pickup from the record.

3.4.2.4 Stylus force gauge.- A stylus force gauge with indicating scale shall be provided on the pickup arm to indicate the stylus force on a record. The gauge shall be calibrated from 0 to 7 grams in 0.5 gram increments and shall be accurate within 0.1 gram when measured in accordance with 4.5.9.

3.4.3 Record player performance requirements.-

3.4.3.1 Pickup arm resonance.- Pickup arm and cartridge assembly resonance shall be less than 15 Hertz (Hz) when tested in accordance with 4.5.14.

3.4.3.2 Flutter.- The flutter (wow) of the turntable shall not exceed 0.2 percent rms at 33 1/3 revolutions per minute (r.p.m.) when tested in accordance with 4.5.15.

3.4.3.3 Vibration isolation.- The turntable, the turntable motor, and record changer mechanism shall be resiliently mounted with suitable damping provided. The resonant frequencies of the mechanism or its mount shall be sufficiently displaced from the other resonant frequencies (such as pickup arm and motor speeds) to keep rumble at least 30 decibels (db) below rated output when measured in accordance with 4.5.17.

3.4.3.4 Tracking error (lateral).- The pickup arm shall be located so that the lateral tracking error from 100 to 7,500 Hz shall not produce more than 1 percent second harmonic distortion when tested in accordance with 4.5.12.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:22Z
Check the source to verify that this is the current version before use.

3.4.3.5 Tracking error (vertical).- The vertical tracking error from 100 to 7,500 Hz shall not produce more than 1 percent second harmonic distortion when tested in accordance with 4.5.13.

3.5 Amplifier requirements.-

3.5.1 Amplifier design.- The equipment shall be provided with two separate and identical amplifiers designated channel A and channel B. Channel A and channel B amplifiers shall be designed with plug-in connections to permit easy removal and replacement. All amplifier components shall be mounted on circuit boards using type V lead terminations in accordance with MIL-STD-275.

3.5.1.1 Microphone input.- The equipment shall be provided with a single microphone input. The microphone input jack shall be connected to channel A and channel B microphone amplifier inputs regardless of the position of the mono-stereo switch (see 3.5.1.4). The microphone input shall have an impedance of 200 ohms ±50 ohms, resistive over a frequency range of 100-7,500 Hertz. The rated input power shall be minus 50 db, referred to a zero level of 1 milliwatt in a resistance of 600 ohms. The microphone input jack type JJ-089 shall be in accordance with MIL-J-641.

3.5.1.2 Record player input.- Channel A and channel B amplifiers shall have separate inputs for the record player cartridge (see 3.4.1.8). Each channel amplifier shall provide record player playback equalization in accordance with the NAB standard on Phonograph Disk Recordings.

3.5.1.3 Amplifier outputs.-

3.5.1.3.1 Channel amplifier outputs.- The rated output power of each channel amplifier shall be 3 watts across an 8 ohm resistive load. Each channel amplifier output shall be connected to a separate output jack, type JJ-089 in accordance with MIL-J-641.

3.5.1.3.2 Auxiliary record player output.- An auxiliary record player output shall provide an equalized (see 3.5.1.2) voltage level from the record player. A voltage level range of 0.3 to 1.5 volts r.m.s. across a 150,000 ohm resistive load shall be provided when tested in accordance with 4.5.18. The auxiliary record player output shall be terminated by a type JJ-089 jack in accordance with MIL-J-641.

3.5.1.4 "Mono-stereo" switch.- A "mono-stereo" switch shall be provided.

3.5.1.4.1 "Mono" position.- When the "mono-stereo" switch is in the "mono" position the record player channel A and channel B signals shall be combined so that the same signal is connected to each channel amplifier.

3.5.1.4.2 "Stereo" position.- When the "mono-stereo" switch is in the "stereo" position, the record player channel A signal shall be connected to the channel A amplifier and the record player channel B signal shall be connected to the channel B amplifier.

3.5.1.5 Balance control.- A balance control shall be provided to equalize the sound levels from both channel loudspeaker's when tested in accordance with 4.5.5. With the balance control set to the midpoint of its rotation, the channel A output level shall be within ±2 db. of the channel B output level. This position of the balance control shall be marked "normal". With the balance control set at maximum counterclockwise rotation the channel A output level shall be at least 20 db. below the channel B output level. The channel B output level shall not vary more than ±2 db. from the output level attained when the balance control was adjusted to its "normal" position. This position of the balance control shall be marked "B max". With the balance control set at maximum clockwise rotation the channel B output level shall be at least 20 db. below the channel A output level. The channel A output level shall not vary more than ±2 db. from the output level attained when the balance control was adjusted to its "normal" position. This position of the balance control shall be marked "A max".

3.5.1.6 Equipment power supply.- All amplifier's shall operate from a single power supply. The equipment power supply shall be designed to operate from a single phase, a.c. power source of 115 volts, 60 Hertz.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:22Z
Check the source to verify that this is the current version before use.

3.5.2 Amplifier controls.-

3.5.2.1 Power "ON - OFF" switch.- A power switch controlling all power to the equipment shall be provided to disconnect both sides of the power line. A pilot light shall be provided and shall remain lighted when the power switch is in the "ON" position.

3.5.2.2 Level control.- A single level control shall be provided to adjust the output level of both channel amplifiers.

3.5.2.3 Tone controls.- A single bass tone control shall be provided for adjusting both channel amplifiers' 100 Hz response relative to the 1000 Hz response and a single treble tone control shall be provided for adjusting both channel amplifiers' 7,500 Hz response relative to the 1,000 Hz response. With the bass and treble controls set to the mid point of their rotation, the frequency response of both channel amplifiers shall be 100 to 7,500 Hz ± 2 db. when tested in accordance with 4.5.3. These controls settings shall be marked "NORMAL". With both bass and treble controls set for maximum counterclockwise rotation the 100 and 7,500 Hz response shall be down at least 10 db. with respect to the 1000 Hz response, and these control settings shall be marked "Min." With the bass and treble controls at full clockwise rotation, the 100 and 7,500 Hz response shall be up at least 10 db. with respect to the 1000 Hz response, and these control settings shall be marked "Max".

3.5.3 Amplifier performance requirements.-

3.5.3.1 Frequency response.- The frequency response of each channel amplifier shall be 100 to 7,500 Hz ± 2 db. when tested in accordance with 4.5.3.

3.5.3.2 Channel separation.- The channel separation between the channel A and channel B amplifiers shall be at least 15 db. from 100 to 7,500 Hz when measured in accordance with 4.5.19.

3.4.3.3 Signal to noise ratio.- The signal to noise ratio of each channel amplifier shall be at least 50 db. when measured in accordance with 4.5.2.

3.5.3.4 Output distortion.- The total harmonic distortion of each channel amplifier shall not exceed 3 percent when tested in accordance with 4.5.6.

3.6 Loudspeakers.- Two 8 inch diameter direct radiator type loudspeakers shall be provided with the equipment.

3.6.1 Loudspeaker cable.- A shielded 8 foot interconnecting cable shall be provided for connecting the channel B amplifier output to one of the loudspeakers. One end of the cable shall be permanently connected to the loudspeaker and the end of the cable shall be terminated with a type PJ-055B terminal plug in accordance with MIL-P-642. An identical interconnecting cable shall be provided for connecting the channel A amplifier output to the remaining loudspeaker.

3.6.2 Loudspeaker performance.- The loudspeaker enclosure shall meet the performance requirements shown in table I. The individual performance characteristics shall, in general, be determined in the order indicated.

Table I - Loudspeaker performance characteristics.

Loudspeaker characteristic	Performance requirement	Method of measurement paragraph
Endurance	24 hours	4.5.22.2
Impedance	8 ± 1 ohms at 400 Hz	4.5.22.3
Output versus input	Linear within 1 db.	4.5.22.4
Frequency response	Within limits shown on figure 1	4.5.22.5
Output sound pressure	94 db. (ref. 0.0002 dyne/cm2)	4.5.22.6

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:22Z
Check the source to verify that this is the current version before use.

3.7 Microphone and cable.- A microphone, shure model 51, or equal, shall be supplied. The microphone case shall be designed for desk mounting, and a microphone desk stand shall be supplied. The microphone shall also be provided with an integral stand adapter having a 5/8 inch 27 thread which allow the microphone to be mounted on a conventional floor standard. The microphone shall be supplied with a 15 foot shielded cable terminated with a type PJ-055B plug in accordance with MIL-P-642.

3.8 Electrical components.-

3.8.1 Level control linearity.- For equal angles of rotation, the attenuation provided by the level control shall be essentially equal in decibels throughout at least 80 percent of the control rotation when tested in accordance with 4.5.7.

3.8.2 Tantalum capacitors.- Tantalum capacitors shall be used for interstage coupling and signal bypass applications.

3.8.3 Semiconductor devices.- The equipment shall employ transistors and other semiconductor devices exclusively where active elements are required.

3.9 Physical requirements.-

3.9.1 Enclosure.- A three section enclosure shall be constructed of fibrous glass reinforced polyester plastic. Two of the enclosure sections shall be constructed identically and each shall house one loudspeaker. The third section of the enclosure shall house the equipment's remaining components. The three sections of the enclosure shall be secured together with heavy duty hinges and latches sufficiently rugged to provide trouble free operation during the life of the equipment. The enclosure hinges shall be designed to permit separation of the speaker enclosures from the third section of the enclosure, but the hinges shall not permit accidental separation of the speaker enclosures from the third section of the enclosure. Rubber mounting feet shall be provided on the bottom and hinged end of the enclosure and shall be mounted by through bolting.

3.9.1.1 Loudspeaker enclosure openings.- The enclosure shall have an opening for the loudspeaker face. The loudspeaker shall be covered with metal mesh or perforated metal not less than 0.040 inch thick. Mesh openings or perforations shall be 5/64 ± 1/64 inch. The loudspeaker enclosure openings shall face into the third section of the enclosure when the equipment is secured for transportation.

3.9.1.2 Enclosure handle.- An enclosure handle shall be mounted by through bolting on the latched end of the third section of the equipment enclosure so the equipment may be carried in one hand when the enclosure is closed. The handle shall be of adequate strength to withstand rough handling during transportation of the equipment.

3.9.2 Mounting.- The enclosure shall be designed for mounting on a shelf or table.

3.9.3 Overall dimensions.- The overall dimensions shall be held to a minimum and shall not exceed the following including the cover when closed:

Width 18 inches
Depth 15 inches
Height 8 inches

3.9.4 Weight.- The weight of the equipment shall not exceed 30 pounds.

3.9.5 Accessory storage.- Storage facilities shall be provided in the enclosure for the following accessories which shall be provided with each equipment:

(a) One microphone with associated components (see 3.7).
(b) One replacement stylus (see 3.4.1.9).
(c) One centering spindle for automatic reproduction of ten 45 r.p.m. records and one centering spindle for automatic reproduction of ten 33-1/3 r.p.m. records.
(d) One centering spindle for manual reproduction of 33-1/3 r.p.m. records.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:22Z
Check the source to verify that this is the current version before use.

3.10 Temperature and humidity.- The equipment shall show no degradation in electrical or mechanical performance after being tested in accordance with 4.5.24.

3.11 Life.- The equipment shall be designed for continuous operation and shall meet the requirements of the life test specified in 4.5.25.

3.12 Rough handling.- All parts of the equipment shall be designed so as to require no critical adjustments. Normal rough handling and shipment shall not necessitate readjustment. When packed as required in the specific contract or order, the equipment shall suffer no damage as a result of tests conducted in accordance with the procedure specified in 4.5.26.

3.13 Design for servicing.- The equipment shall be designed so that servicing of all parts can be quickly and easily performed.

3.14 Designation and marking.- In addition to the designation and marking requirements of MIL-I-983, all controls shall be permanently marked to indicate the function performed. The channel A amplifier output jack shall be marked "Channel A (left)" and the channel B amplifier output jack shall be marked "Channel B (right)".

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Preproduction inspection.- Preproduction inspection shall consist of the examination and tests listed in table II, which shall be performed, in general, in the order listed.

4.3 Sampling for quality conformance inspection.-

4.3.1 Inspection lot.- All equipment presented for delivery at one time shall be considered a lot. The lot may include the entire contract quantity or it may be the production of any convenient time period.

4.3.2 Sampling for group A examination and tests.- All equipments covered on the contract or order shall be subjected to the group A examination and tests listed in table IV. Failure to conform to this specification for any group A examination or test shall be counted as a defect, and the equipment shall not be offered for delivery.

4.3.3 Sampling for group B tests.- A sample of equipments shall be selected from each inspection lot in accordance with table III and subjected to the group B tests listed in table IV. Failure to conform to this specification for any group B test shall be counted as a defect, and the equipment shall not be offered for delivery. If the number of such nonconforming equipments in any sample exceeds the acceptance number for that sample, this shall be cause for rejection of the lot represented by that sample.

4.3.4 Sampling for group C tests.- Group C tests will be required by the bureau or agency concerned when the basic design of the equipment or the material of a vital part has been changed. One complete equipment shall be selected and subjected to the group C tests listed in table IV. In the event of failure to conform to this specification for any group C test, the contractor shall correct the cause of failure on future production units and repair the deficiency in all equipments produced on the contract or order.

4.4 Quality conformance inspection.- The sample equipments selected in accordance with 4.3 shall be subjected to the tests listed in table IV. Tests shall be performed, in general, in the order listed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:22Z
Check the source to verify that this is the current version before use.

Table II - Reproduction inspection.

Examination and tests	Requirement paragraph	Test reference
General examination	--	MIL-I-983
Operating	--	4.5.1
Supply line voltage and frequency variation	3.3	MIL-I-983
Shielding and radio frequency noise reduction	3.3	MIL-I-983
Signal to noise	3.5.3.3	4.5.2
Frequency response	3.5.3.1	4.5.3
Tone controls	3.5.2.3	4.5.4
Balance control	3.5.1.5	4.5.5
Distortion	3.5.3.4	4.5.6
Level control linearity	3.8.1	4.5.7
Turntable platen	3.4.1.4	4.5.8
Stylus force gauge	3.4.2.4	4.5.9
Trip mechanism force	3.4.1.3	4.5.10
Turntable speed	3.4.2.2	4.5.11
Tracking error (lateral)	3.4.3.4	4.5.12
Tracking error (vertical)	3.4.3.5	4.5.13
Pickup arm resonance	3.4.3.1	4.5.14
Flutter	3.4.3.2	4.5.15
Record size selector switch	3.4.2.1	4.5.16
Vibration isolation	3.4.3.3	4.5.17
Auxiliary record player output	3.5.1.3.2	4.5.18
Record player frequency response	3.5.3.1	4.5.19
Channel separation	3.5.3.2	4.5.19
Pitch and roll	3.4.1.7	4.5.20
Pickup arm clamp	3.4.1.7.1	4.5.21
Loudspeaker measurements	3.6.2	4.5.22
Life	3.11	4.5.25
Temperature and humidity	3.10	4.5.24
Rough handling	3.12	4.5.26
Physical requirements	3.9	4.5.23

Table III - Sampling for group B tests.

Number of equipments in inspection lot	Number of equipments in samples	Number of equipments nonconforming on group B tests	
		Acceptance number	Rejection number
3 and under	all	-	-
4 to 15	3	0	1
16 to 40	5	0	1
41 to 110	7	0	1
111 to 300	10	0	1
301 to 500	15	1	2
501 and over	25	2	3

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:22Z
Check the source to verify that this is the current version before use.

Table IV - Quality conformance inspection.

Examination and tests	Requirement paragraph	Test reference
Group A		
General examination	--	MIL-I-983
Operating	--	4.5.1
Group B		
Signal to noise	3.5.3.3	4.5.2
Frequency response	3.5.3.1	4.5.3
Auxiliary record player output	3.5.1.3.2	4.5.18
Distortion	3.5.3.4	4.5.6
Flutter	3.4.3.2	4.5.15
Record player frequency response	3.5.3.1	4.5.19
Channel separation	3.5.3.2	4.5.19
Stylus force gauge	3.4.2.4	4.5.9
Group C		
Supply line voltage and frequency variation	3.3	MIL-I-983
Trip mechanism force	3.4.1.3	4.5.10
Turntable speed	3.4.2.2	4.5.11
Record size selector switch	3.4.2.1	4.5.16
Vibration isolation	3.4.3.3	4.5.17
Pickup arm resonance	3.4.3.1	4.5.14
Tracking error (lateral)	3.4.3.4	4.5.12
Tracking error (vertical)	3.4.3.5	4.5.13
Shielding and radio frequency noise reduction	3.3	MIL-I-983
Temperature and humidity	3.10	4.5.24
Physical requirements	3.9	4.5.23
Pitch and roll	3.4.1.7	4.5.20
Life	3.11	4.5.25
Rough handling	3.12	4.5.26
Balance control	3.5.1.5	4.5.5
Tone controls	3.5.2.3	4.5.4
Loudspeaker measurements	3.6.2	4.5.22
Pickup arm clamp	3.4.1.7.1	4.5.21
Turntable platen	3.4.1.4	4.5.8
Level control linearity	3.8.1	4.5.7

4.5 *Test procedures.*-

4.5.1 Operating test.- The operating test shall consist of amplifying microphone signals and reproducing:

(a) Two twelve inch commercial phonograph records at 33-1/3 r.p.m. in accordance with 3.4.1.1 and 3.4.1.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:22Z
Check the source to verify that this is the current version before use.

(b) Two 45 r.p.m. commercial records in accordance with 3.4.1.1 and 3.4.1.2.
(c) One twelve inch commercial phonograph record at 33-1/3 r.p.m. in accordance with 3.4.2.3.4.

All controls shall be actuated to determine that they are functioning properly and the selected signal is available at the proper output.

4.5.2 Signal to noise.- A 1000 Hz signal of 0.5 millivolts shall be applied to the microphone input. Both loudspeakers shall be disconnected from the channel A and channel B output jacks and an 8 ohm resistive load shall be connected to each loudspeaker output jack. The bass, treble, and balance controls shall be adjusted to give no attenuation and the level control shall be adjusted to give rate power of 3 watts across each of the resistive loads. The levels across the 8 ohm resistive loads shall be measured with the signal removed from the microphone input with all amplifier controls set at the same position as where rated power output level was attained. The output level across each load shall be expressed in db. relative to the rated output signal to determine conformance with 3.5.3.3.

4.5.3 Frequency response.- A 1000 Hz signal at rated input power (see 3.5.1.1) shall be applied to the microphone input. Both loudspeakers shall be disconnected from the channel A and channel B output terminals and an 8 ohm resistive load shall be connected to each loudspeaker output terminal. The bass, treble, and balance controls shall be adjusted to give a flat frequency response and the level control shall be adjusted to give rated power across each of the resistive loads. Frequencies of 100, 300,700, 1000, 2000, 5000, and 7,500 Hertz at rated input power shall be applied to the microphone input and the outputs of these frequencies shall be measured across each 8 ohm resistive load with all the amplifier controls set at the same position as when maximum output levels at 1000 Hz was attained. The output level across each load shall be related in db. to the 1000 Hz output level to determine conformance with 3.5.3.1.

4.5.4 Tone controls.- A 1000 Hz signal at rated input power shall be applied to the microphone input. Both loudspeakers shall be disconnected from the channel A and channel B output jacks and an 8 ohm resistive load shall be connected to each loudspeaker output jack. The bass, treble, and balance controls shall be adjusted to give a flat frequency response and the level control shall be adjusted to give 0.3 watts output across each of the resistive loads. The 1000 Hz signal shall be removed, and a 100 Hz signal shall be applied to the microphone input. With the level and balance controls set at the same positions as when the 0.3 watt output level at 1000 Hz was attained, the bass and treble controls shall be placed in the "min" position and the 100 Hz response measured across the resistive loads shall be related in db. to the 1000 Hz response to determine conformance with 3.5.2.3. With the level and balance controls set at the same positions as when the 0.3 watt output level at 1000 Hz was attained, the bass and treble controls shall be placed in the "Max" position and the 100 Hz response measured across the resistive loads shall be related in db. to the 1000 Hz response to determine conformance with 3.5.2.3. The test shall be repeated with a 7,500 Hz signal at rated input power applied to the microphone input to determine conformance with 3.5.2.3.

4.5.5 Balance control.- A 1000 Hz signal at rated input power shall be applied to the microphone input. Both loudspeakers shall be disconnected from the channel A and channel B output jacks and an 8 ohm resistive load shall be connected to each loudspeaker output jack. The bass, treble, and balance controls shall be adjusted to give a flat frequency response and the level control shall be adjusted to give 3 db. below rated output power across each of the resistive loads to determine conformance with 3.5.1.5. With the tone and level controls set at the same positions as when rated output power across each resistive load was attained, the balance control shall be rotated to its "A max" and "B max" positions and the channel output levels measured and related in db. to determine conformance with 3.5.1.5.

4.5.6 Distortion.- A signal generator having an output distortion content of less than 0.3 percent shall be used as an input signal source. A 1000 Hz signal at rated input power (see 3.5.1.1) shall be applied to the microphone input. Both loudspeakers shall be disconnected from the channel A and channel B output jacks and an 8 ohm resistive load shall be connected to each loudspeaker output jack. The bass, treble, and balance controls shall be adjusted to give a flat frequency response and the level control shall be adjusted to give rated power across each of the resistive loads. The total harmonic distortion shall be measured to determine conformance with 3.5.3.4. The test shall be repeated using input signals at frequencies of 100 and 7,500 Hz to determine conformance with 3.5.3.4.

4.5.7 Level control linearity.- The linearity of the level control shall be measured to determine conformance with 3.8.1.

4.5.8 Turntable platen.- The turntable platen shall be weighed to determine conformance with 3.4.1.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:22Z
Check the source to verify that this is the current version before use.

4.5.9 Stylus force gauge.- The stylus force gauge scale shall be measured with a balanced scale to determine conformance with 3.4.2.4.

4.5.10 Trip mechanism force.- The trip mechanism force required to trip the record changer mechanism shall be measured with a gram gauge to determine conformance with 3.4.1.3. The gram gauge shall be accurate within 0.1 gram within a range from 0 to 1 gram.

4.5.11 Turntable speed.- A stroboscope disc and stroboscope or test record shall be used to determine compliance with 3.4.2.2. The turntable speeds shall conform to 3.4.2.2 over the range of power supply voltage tolerances specified in MIL-I-983. Turntable speeds shall only be tested at a power supply frequency of 60 Hertz.

4.5.12 Tracking error (lateral).- The stylus force gauge shall be adjusted to give 2 grams stylus force. A test record, technical series test record STR-130, side A, band 7 (manufactured by CBS Laboratories, Stamford, Connecticut) or equal, shall be used to test for conformance with 3.4.3.4.

4.5.13 Tracking error (vertical).- The stylus force gauge shall be adjusted to give 2 grams stylus force. A test record, technical series test record STR-100, side B, band 5 (manufactured by CBS Laboratories, Stamford, Connecticut) or equal, shall be used to determine conformance with 3.4.3.5.

4.5.14 Pickup arm resonance.- The stylus force gauge shall be adjusted to give 2 grams stylus force. A test record, technical series test record STR-100, side A, bands 4 and 5 (manufactured by CBS Laboratories, Stamford, Connecticut) or equal, shall be used to determine conformance with 3.4.3.1.

4.5.15 Flutter.- A test record, technical series test record BTR-150, side A, band 5 (manufactured by CBS Laboratories, Stamford, Connecticut) or equal, shall be used with a Furst type wow meter, or equal to determine conformance with 3.4.3.2.

4.5.16 Record size selector switch.- The record size selector switch shall be placed in the 7 inch position. Three commercial 7 inch, 45 r.p.m. records shall be reproduced automatically to determine conformance with 3.4.2.1 and the test shall be repeated with three commercial 10 inch, 78 r.p.m. records, and three commercial 12 inch, 33-1/3 r.p.m. records to determine conformance with 3.4.2.1 and 3.4.1.1.

4.5.17 Vibration isolation.- The mono-stereo switch shall be placed in the stereo position and the stylus force gauge shall be adjusted to give 2 grams stylus force. A test record, technical series test record STR-120, side B (manufactured by CBS Laboratories, Stamford, Connecticut) or equal, shall be used as a signal source. The channel amplifier A and B output terminals shall be terminated with an 8 ohm resistive load. Band 3 of the CBS test record or equal shall be applied to the record player channel A input and the level control shall be adjusted to give rated output across the channel A output resistive load. Band 3 of the test record shall be removed and band 1 or equal shall be applied to the channel A record player. With the level control set in the same position as when rated output was attained, the output level of band 1 shall be related in db. to the output level of band 3 to determine conformance with 3.4.3.3. The test shall be repeated relating bands 3 and 8, bands 2 and 1, bands 2 and 8, to determine conformance with 3.4.3.3.

4.5.18 Auxiliary record player output.- The auxiliary record player output shall be terminated with a 150,000 ohm resistive load and the mono-stereo switch placed in the "mono" position. The tone and balance controls shall be placed in their "normal" positions. A test record STR-130, side A, band 7 (manufactured by CBS Laboratories, Stamford, Connecticut) or equal shall be used as a signal source and the level control shall be adjusted to give output levels from 0.3 to 1.5 volts r.m.s. across the resistive load to determine conformance with 3.5.1.3.2.

4.5.19 Frequency response and channel separation.- The channel A and B output terminals shall each be terminated with an 8 ohm resistive load. A frequency test record BTR-150, side B (manufactured by CBS Laboratories, Stamford, Connecticut) or equal shall be used as a signal source. The stylus force gauge shall be adjusted to 2 grams stylus force. The tone and balance controls shall be adjusted to the "normal" positions and the "mono-stero" switch shall be placed in the "stereo" position. A 1000 Hz, 3.54 centimeters per second, reference tone from the test record shall be applied to the channel A record player input and the level control shall be adjusted to give rated power at the channel A output. With all controls set at the same

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:22Z
Check the source to verify that this is the current version before use.

position that rated power output at 1000 Hz was attained, the frequency test record shall apply signal frequencies from 100 to 7,500 Hz to the channel A record player input. The output level at these frequencies shall be related in db. to determine conformance with 3.5.3.1 and 3.5.3.2, respectively. The test shall be repeated by applying the test record signal to the channel B record player input to determine conformance with 3.5.3.1 and 3.5.3.2.

4.5.20 Pitch and roll.- The equipment shall reproduce automatically two records at 33-1/3 r.p.m. and reproduce automatically two records at 45 r.p.m. at a stylus gauge (see 3.4.2.4) force optimum for the cartridge while undergoing simultaneous pitch and roll as follows to determine conformance with 3.4.1.7.

4.5.20.1 Roll.- The roll shall be through an angle of 50 degrees (±25 degree pitch) at the rate of 10 Hertz and acceleration varying with an approximate sine wave form. Operation shall be possible with roll either perpendicular or parallel to the plane of the pickup arm when in the arm rest position.

4.5.20.2 Pitch.- The pitch shall be through an angle of 16 degrees (±8 degrees) at the rate of 15 Hertz with an acceleration varying with an approximate sine wave form.

4.5.21 Pickup arm clamp.- The record changer reproduction cycle shall be initiated (see 3.4.2.3.3(a)) with the pickup arm secured by the pickup arm clamp. Part of the operating test (see 4.5.1(a)) shall be performed to determine conformance with 3.4.1.7.1. Flutter, lateral and vertical tracking error tests shall also be performed to determine conformance with 3.4.3.2, 3.4.3.4, and 3.4.3.5, respectively.

4.5.22 Loudspeaker measurements.- The methods of measurements, by means of which the loudspeaker performance characteristics specified in 3.6. shall be determined, are described in 4.5.22.1 through 4.5.22.6. All measurements shall be made at the rated operating conditions of 5 watts unless otherwise specified, with the loudspeaker installed in its enclosure. The amplifier contained in the equipment shall not be used for these measurements. An external amplifier of at least 20 watts capacity, low distortion and low noise shall be employed. Prior to performing any measurements, the loudspeaker shall be subjected to the endurance test of 4.5.22.2 in order to condition the suspension system in addition to determining adequate physical power handling capacity.

4.5.22.1 Acoustic environment.- All acoustic measurements shall be performed with the loudspeaker and measuring microphone located in an essentially free field.

4.5.22.2 Endurance.- A 1000 Hz, 9 volt signal interrupted at a rate between 100 and 115 times per second (t.p.s.) in equal on and off periods (equivalent to an average electrical input of 5 volt amperes) shall be applied to the loudspeaker voice coil continuously for a period of 24 hours. At the conclusion of the endurance test the loudspeaker shall meet all performance requirements of this specification and shall show no evidence of physical damage.

4.5.22.3 Impedance.- The loudspeaker impedance shall be determined with the loudspeaker mounted in its enclosure. A constant current of 10 milliamperes shall be applied to the voice coil through a series resistance of at least 1000 ohms at 400 Hz. The voice coil voltage shall be measured and the impedance determined.

4.5.22.4 Output versus input.- An electrical signal warbled in frequency, linearly with time, over the range from 800 to 1250 Hz at a warble rate of approximately 6 Hz shall be applied to the loudspeaker voice coil. The level of the signal shall be increased in steps up to at least 5 voltamperes (6.4 volts) input. At each step the acoustic output pressure shall be measured at 10 feet from the frontmost plane of the loudspeaker enclosure on the axis through the voice coil of the loudspeaker. The signal shall be applied for a sufficient time at each step to permit the voice coil temperature to reach equilibrium before the acoustic output is measured. The acoustic output shall be plotted against input voltage. In addition to the curve thus obtained a straight line shall be drawn between the 0 and the 6.4 volt input point. Deviation from linearity shall be the maximum percentage deviation of the sound pressure from the straight line characteristic at any point below the 6.4 volt input point.

4.5.22.5 Frequency response.- A signal at a constant amplitude of 6.4 volts shall be applied to the loudspeaker voice coil and the frequency swept through a range of 100 to 7,500 Hz. The output sound pressure of the loudspeaker shall be measured at a distance of 10 feet from the face of the loudspeaker enclosure and on the axis of the loudspeaker cone. The response characteristic shall be in accordance with figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:22Z
Check the source to verify that this is the current version before use.

4.5.22.6 *Output sound pressure.*- The output sound pressure shall be determined from the frequency response characteristic obtained in 4.5.22.5. The response characteristic of the loudspeaker shall be superimposed on and within the curve of figure 1 in such a manner that the lower limit of the curve of figure 1 and the response characteristic touch. This point of touching establishes pressure levels for figure 1. The output sound pressure of the loudspeaker is considered to be that pressure represented by the midpoint between the limits shown on figure 1 at 1000 Hz. The output sound pressure shall be as specified in 3.6.2.

4.5.23 Physical parameters.- The equipment's physical parameters shall be measured to determine conformance with 3.9.

4.5.24 Temperature and humidity.- The equipment shall be stored for 24 hours at 150°F, and 85 to 95 percent relative humidity. The equipment shall then be given an operating test, distortion, frequency response, signal to noise, flutter test, record player frequency response, and channel separation test to determine conformance with 3.10.

4.5.25 Life test.- The life test shall be conducted as follows:

(a) The record player shall be operated under normal room conditions of 70 ±5 degrees F. and 45 ±5 percent relative humidity for a total of 175 hours as follows with the pickup arm in the arm rest:

(1) 75 hours at 33-1/3 r.p.m.
(2) 75 hours at 45 r.p.m.
(3) 25 hours at 78 r.p.m.

(b) After (a) above is performed the record player shall be cut "off" for 24 hours. The record player shall then be operated under normal room conditions of temperature and humidity as follows:

(1) Reproduce automatically 10 commercial records at 33-1/3 r.p.m.
(2) Reproduce automatically 10 commercial records at 45 r.p.m.
(3) Reproduce automatically 10 commercial records at 78 r.p.m.

No oiling or other servicing shall be required during the life test period.

4.5.26 Rough handling.- The equipment packed for normal shipment shall be held 24 inches above a concrete floor and dropped as follows:

(a) Once on a botton corner.
(b) Once on the opposite top corner.
(c) Once on the bottom face.

The equipment shall then be unpacked and the operating test specified in 4.5.1, performed to determine conformance with 3.12.

5. PREPARATION FOR DELIVERY

5.1 Domestic shipment and early equipment installation and for storage of onboard repair parts.-

5.1.1 Public address set.-

5.1.1.1 Preservation and packaging.- Preservation and packaging which may be the supplier's commercial practice, shall be sufficient to afford adequate protection against corrosion, deterioration and physical damage during shipment from the supply source to the using activity and until early installation.

5.1.1.2 Packing.- Packing shall be accomplished in a manner which will insure acceptance by common carrier at the lowest rate and will afford protection against physical or mechanical damage during direct shipment from the supply source to the using activity for early installation. The shipping containers or method of packing shall conform to the Uniform Freight Classification Ratings, Rules and Regulations or other carrier regulations as applicable to the mode of transportation and may conform to the suppliers commercial practice.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:22Z
Check the source to verify that this is the current version before use.

5.1.1.3 Marking.- Shipment marking information shall be provided on interior packages and exterior shipping containers in accordance with the contractor's commercial practice. The information shall include nomenclature, Federal stock number or manufacturer's part number, contract or order number, contractor's name and destination.

5.1.2 Onboard repair parts.- The onboard repair parts shall be preserved and packaged level A; packed level C and marked levels A and C, respectively, in accordance with MIL-E-17555.

5.2 Domestic shipment and storage or overseas shipment.- The requirements, and levels of preservation, packaging, packing and marking for shipment shall be specified by the procuring activity (see 6.2).

(5.2.1 The following provides various levels of protection during domestic shipment and storage or overseas shipment, which may be required when procurement is made:

5.2.1.1 Preservation, packaging, packing and marking: The equipment and accessories, repair parts and publications shall be preserved and packaged levels A or C; packed level A or B as specified and marked in accordance with MIL-E-17555.)

6. NOTES

6.1 Intended use.- The public address set covered by this specification is intended for use aboard Naval ships.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Quantity of items required.
(c) Quantity of manuals required (see 3.3).
(d) Inventory control point for stock repair parts (see 3.3).
(e) Whether Federal stock number is to be entered on the identification plate (see 3.3).
(f) Preservation and packaging, packing, and marking if other than as specified in 5.1 (see 5.2).

6.3 Preproduction.- Invitations for bid should provide that the Government reserves the right to waive the requirement for preproduction samples as to those bidders offering a product which has been previously procured or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending procurement.

6.4 CHANGES FROM PREVIOUS ISSUE. THE EXTENT OF CHANGES (DELETIONS, ADDITIONS, ETC.) PRECLUDE THE ANNOTATION OF THE INDIVIDUAL CHANGES FROM THE PREVIOUS ISSUE OF THIS DOCUMENT.

Preparing activity:
Navy-SH
(Project 5830-N075SH)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:22Z
Check the source to verify that this is the current version before use.

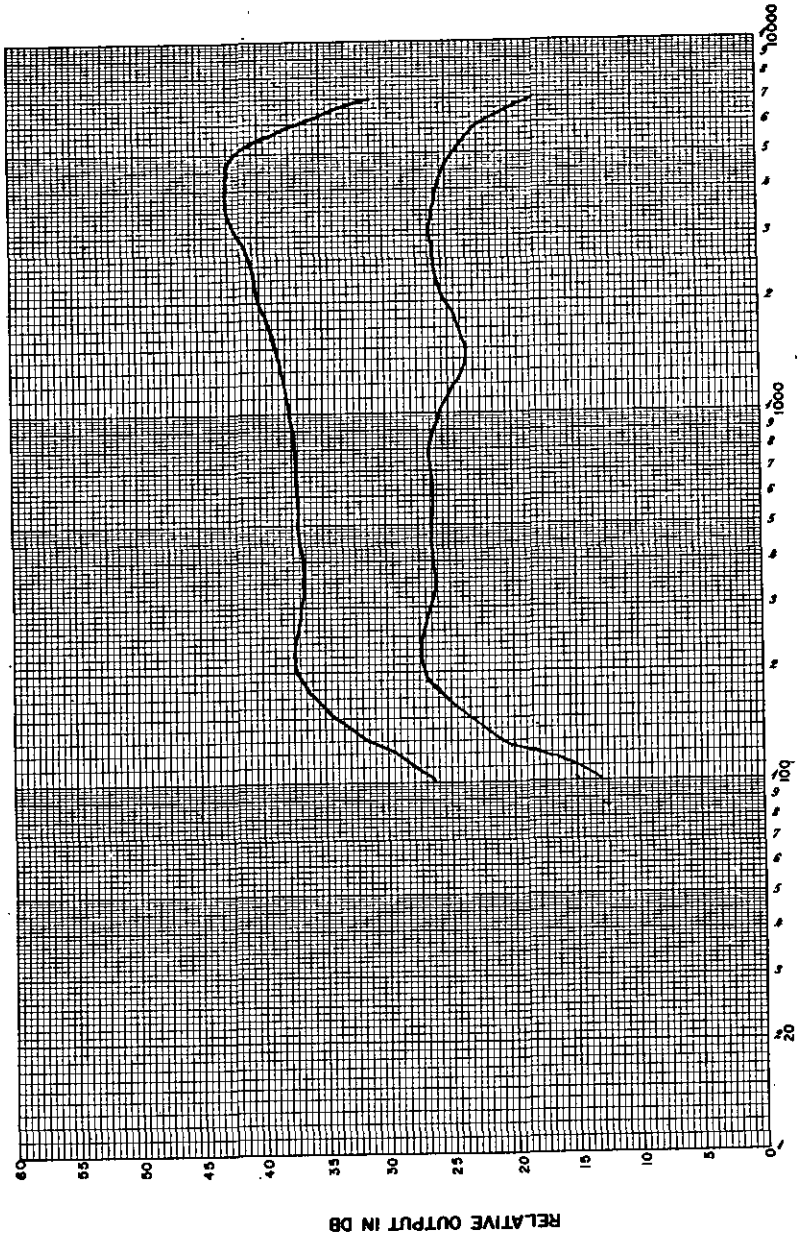


Figure 1 - Frequency response.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:22Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL SHIP ENGINEERING CENTER
WASHINGTON, D.C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

COMMANDER, NAVAL SHIP ENGINEERING CENTER
DOCUMENTS AND DOD PROGRAM
ENGINEERING METHODS AND STANDARDS DIVISION
DEPARTMENT OF THE NAVY
WASHINGTON, D.C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:22Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)* | CITY AND STATE

CONTRACT NO. | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT $

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)* | DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:22Z
Check the source to verify that this is the current version before use.