MILITARY SPECIFICATION SHEET

BEARINGS, SLEEVE, FLANGED, SELF-LUBRICATING, 325°F

This amendment forms a part of MIL-B-81934/2C, dated 4 January 1988 and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 4

Under the heading "Finish," delete and add the following:

"' ' Code = For aluminum bearings, anodized per MIL-A-8625, Type I or II or chemical film treatment per MIL-C-5541.
For corrosion resistant steel bearings, the OD of unplated corrosion resistant steel sleeve bearings shall be passivated per QQ-P-35 and the procurement specification.
'P' Code = When specified by the purchaser, corrosion resistant steel shall be cadmium plated per QQ-P-416 and the procurement specification. "

Under the heading "Surface texture," delete and substitute the following:

"Smooth machine finish 63 micro-inch Ra on OD; 125 micro-inch Ra on all other metallic surfaces per ANSI/ASME B46.1. Liner surfaces are exempt from surface texture measurements."

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:25Z
Check the source to verify that this is the current version before use.

Under the heading "Example of part number," delete and substitute the following:

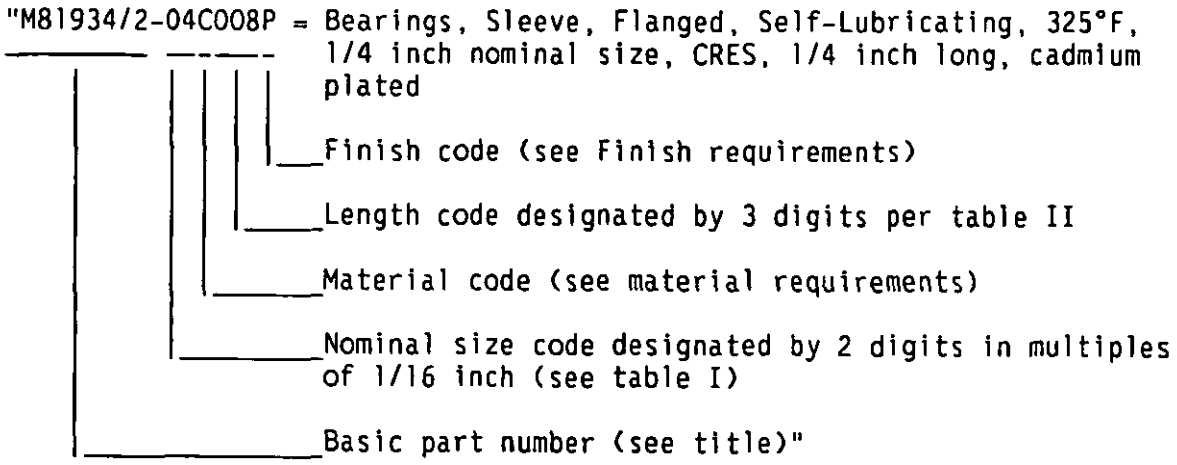

Custodians:
Navy - AS
Air Force - 99
Army - AV

Reviewer activities:
Navy - SH
Air Force - 84
Army - AR, AT, MI
DLA - IS

Preparing Activity:
Navy - AS
(Project 3120-0700-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:25Z
Check the source to verify that this is the current version before use.