
THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.


THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-B-81934.

FORM APPROVED
OMB NO. 0704-0188


Ⓓ

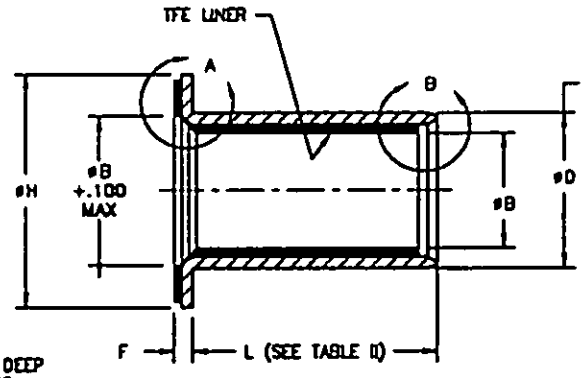

NOTE:
CONCENTRICITY TOLERANCE BETWEEN ØB AND ØD DIA SHALL NOT EXCEED .003 TIR

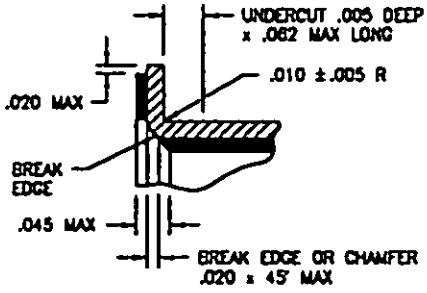

DETAIL A

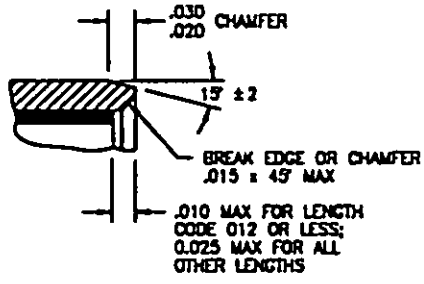

DETAIL B

Ⓓ TABLE I. DIMENSIONS AND WEIGHTS

DASH NO.	NOMINAL SIZE (REF)	ØB (BORE DIA) +.0000 −.0010	ØD 1/	F +.000 −.005	ØH +.000 −.020	SLEEVE WEIGHT LB/IN (REF) L = 1.000		FLANGE WEIGHT LB/IN (REF)	
						AL	CRES	AL	CRES
-04	.2500	.2515	.3760	.0625	.750	.006	.016	.002	.006
-05	.3125	.3140	.4388	.0625	.812	.007	.019	.003	.007
-06	.3750	.3765	.5012	.0625	.875	.008	.022	.003	.007
-07	.4375	.4390	.5638	.0625	.937	.009	.025	.003	.008
2/ -07A					.745				
-08	.5000	.5015	.6265	.0625	1.000	.011	.028	.003	.009
-09	.5625	.5640	.6892	.0625	1.125	.012	.031	.004	.011
-10	.6250	.6265	.8142	.0625	1.250	.021	.056	.005	.014
-11	.6875	.6890	.8767	.0625	1.375	.022	.060	.006	.016
-12	.7500	.7515	.9393	.0625	1.500	.024	.065	.007	.020
-14	.8750	.8765	1.0645	.0625	1.625	.028	.075	.008	.022
-16	1.0000	1.0015	1.1898	.0625	1.750	.031	.084	.009	.024
-18	1.1250	1.1265	1.3148	.0937	1.875	.035	.094	.015	.041
-20	1.2500	1.2515	1.4398	.0937	2.000	.038	.103	.016	.045
-22	1.3750	1.3765	1.5648	.0937	2.125	.041	.113	.017	.048
-24	1.5000	1.5015	1.7523	.0937	2.250	.062	.171	.018	.051
-26	1.6250	1.6265	1.8773	.0937	2.375	.067	.183	.020	.055
-28	1.7500	1.7515	2.0023	.0937	2.500	.071	.196	.021	.058
-32	2.0000	2.0015	2.2523	.0937	2.750	.081	.222	.023	.065

1/ ØD TOLERANCE: ALUMINUM ±.0005; CORROSION RESISTANT STEEL +.0000, −.0005

EXAMPLE OF WEIGHT CALCULATION: M81934/2-16A008:
SLEEVE WEIGHT: (0.031 LB/IN) x .250 INCH = 0.008 LB
FLANGE WEIGHT: = 0.009 LB
TOTAL WEIGHT: = 0.017 LB

2/ INACTIVE FOR NEW DESIGN AFTER 1 AUGUST 1981. USE M81934/2-07.

Ⓓ DENOTES CHANGE

PREPARING ACTIVITY: NAVY - AS
CUSTODIANS: ARMY-AV NAVY-AIR FORCE-99
REVIEW: DLA-IS, NAVY-SH, AIR FORCE-84 ARMY-AR, AT, MI
PROJECT NUMBER: 3120-0743-02

MILITARY SPECIFICATION SHEET

TITLE
BEARING, SLEEVE, FLANGED, SELF-LUBRICATING, 325° F

SPECIFICATION SHEET NUMBER
MIL-B-81934/2 5 REV D DEC 94

SUPERSEDING
MIL-B-81934/2 REV C 4 JAN 88

AMSC - N/A FSC 3120

DD FORM 1 MAY 88 672

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:25Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-B-81934.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

FORM APPROVED
OMB NO. 0704-0188

Ⓓ TABLE II. SLEEVE BEARING LENGTH

DASH NO.	NOMINAL SIZE	LENGTH L +.000 −.010														
		.156	.187	.218	.250	.281	.312	.343	.375	.437	.500	.562	.625	.687	.750	.875
−04	.2500	005	006	007	008	009	010	011	012	014						
−05	.3125	005	006	007	008	009	010	011	012	014	016	018				
−06	.3750	005	006	007	008	009	010	011	012	014	016	018	020	022		
−07	.4375	005	006	007	008	009	010	011	012	014	016	018	020	022	024	028
−08	.5000	005	006	007	008	009	010	011	012	014	016	018	020	022	024	028
−09	.5625	005	006	007	008	009	010	011	012	014	016	018	020	022	024	028
−10	.6250	005	006	007	008	009	010	011	012	014	016	018	020	022	024	028
−11	.6875				008	009	010	011	012	014	016	018	020	022	024	028
−12	.7500				008	009	010	011	012	014	016	018	020	022	024	028
−14	.8750				008	009	010	011	012	014	016	018	020	022	024	028
−16	1.0000				008	009	010	011	012	014	016	018	020	022	024	028
−18	1.1250						010	011	012	014	016	018	020	022	024	028
−20	1.2500								012	014	016	018	020	022	024	028
−22	1.3750								012	014	016	018	020	022	024	028
−24	1.5000								012	014	016	018	020	022	024	028
−26	1.6250										016	018	020	022	024	028
−28	1.7500										016	018	020	022	024	028
−32	2.0000										016	018	020	022	024	028

TABLE II. SLEEVE BEARING LENGTH (CONTINUED)

DASH NO.	NOMINAL SIZE	LENGTH L +.000 −.010														
		1.000	1.125	1.250	1.375	1.500	1.625	1.750	1.875	2.000	2.125	2.250	2.375	2.500	2.750	3.000
−04	.2500															
−05	.3125															
−06	.3750															
−07	.4375															
−08	.5000															
−09	.5625	032	036													
−10	.6250	032	036	040	044											
−11	.6875	032	036	040	044	048	052									
−12	.7500	032	036	040	044	048	052									
−14	.8750	032	036	040	044	048	052									
−16	1.0000	032	036	040	044	048	052	056	060							
−18	1.1250	032	036	040	044	048	052	056	060							
−20	1.2500	032	036	040	044	048	052	056	060	064	068					
−22	1.3750	032	036	040	044	048	052	056	060	064	068					
−24	1.5000	032	036	040	044	048	052	056	060	064	068	072	076	080	088	
−26	1.6250	032	036	040	044	048	052	056	060	064	068	072	076	080	088	096
−28	1.7500	032	036	040	044	048	052	056	060	064	068	072	076	080	088	096
−32	2.0000	032	036	040	044	048	052	056	060	064	068	072	076	080	088	096

PREPARING ACTIVITY: NAVY − AS
CUSTODIANS: ARMY−AV NAVY−
AIR FORCE−99
REVIEW: DLA−IS, NAVY−SH, AIR FORCE−84
ARMY−AR, AT, MI
PROJECT NUMBER: 3120−0743−02

MILITARY SPECIFICATION SHEET

TITLE
BEARING, SLEEVE, FLANGED, SELF−LUBRICATING, 325° F

SPECIFCATION SHEET NUMBER
MIL−B−81934/2 REV D 5 DEC 94

SUPERSEDING
MIL−B−81934/2 REV C 4 JAN 88

AMSC − N/A FSC 3120

DD FORM 1 MAY 88 672 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:25Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-B-81934.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

FORM APPROVED
OMB NO. 0704-0188

Ⓓ TABLE III. OVERSIZE BEARING DIMENSIONS 2/

RESTRICTED USAGE FOR REPAIR WORK ONLY

.010 AND .020 OVERSIZE OUTSIDE DIAMETER FOR REPLACEMENT OF BEARINGS SHOWN ON SHEET 1

DASH NO.	NOMINAL SIZE	1st OVERSIZE (.010) ØD 1/
-04	.2500	.3860
-05	.3125	.4486
-06	.3750	.5112
-07	.4375	.5738
-08	.5000	.6365
-09	.5625	.6992
-10	.6250	.8242
-11	.6875	.8867
-12	.7500	.9493
-14	.8750	1.0745
-16	1.0000	1.1998
-18	1.1250	1.3248
-20	1.2500	1.4498
-22	1.3750	1.5748
-24	1.5000	1.7623
-26	1.6250	1.8873
-28	1.7500	2.0123
-32	2.0000	2.2623

DASH NO.	NOMINAL SIZE	2nd OVERSIZE (.020) ØD 1/
-04	.2500	.3960
-05	.3125	.4586
-06	.3750	.5212
-07	.4375	.5838
-08	.5000	.6465
-09	.5625	.7092
-10	.6250	.8342
-11	.6875	.8967
-12	.7500	.9593
-14	.8750	1.0845
-16	1.0000	1.2098
-18	1.1250	1.3348
-20	1.2500	1.4598
-22	1.3750	1.5848
-24	1.5000	1.7723
-26	1.6250	1.8973
-28	1.7500	2.0223
-32	2.0000	2.2723

1/ ØD TOLERANCE: ALUMINUM ±.0005; CORROSION RESISTANT STEEL +.0000, -.0005.

2/ BEFORE INITIATING A REPAIR PROCEDURE TO USE AN OVERSIZE BEARING, APPROVAL FOR MODIFYING AND REIDENTIFYING THE BEARING HOUSING MUST BE OBTAINED FROM THE COGNIZANT ENGINEERING AUTHORITY.

REQUIREMENTS:

1. MATERIAL: BEARING: "A" INDICATES ALUMINUM ALLOY QQ-A-200/3 OR QQ-A-225/6 (2024T851 OR 2024T8511).
   NOTE: THE MANUFACTURER MAY SUBSTITUTE ALLOY 2024T351 OR 2024T3511 FOR 2024T851 OR 2024T8511, RESPECTIVELY, PROVIDED THE PROCESSING PROCEDURES EMPLOYED IN MANUFACTURING THE BEARING RESULT IN A CONVERSION OF ALLOY TO 2024T851 OR 2024T8511.
   "C" INDICATES CORROSION RESISTANT STEEL, AMS-5643 (17-4PH) CONDITION H1150 PER MIL-H-6875.

   LINER: SEE PROCUREMENT SPECIFICATION.
2. SURFACE TEXTURE: SMOOTH MACHINE FINISH 63 MICRO-INCH Ra ON O.D.; 125 MICRO-INCH Ra ON ALL OTHER METALLIC SURFACES PER ASME-B46.1, UNLESS OTHERWISE SPECIFIED.
3. BREAK SHARP EDGES AND CORNERS AND REMOVE ALL BURRS AND SLIVERS.
4. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE: DECIMALS ±.010 AND ANGLES ±0.5°.
5. MARKING: FOR DASH NO. 08 AND LARGER THE MILITARY PART NUMBER SHALL BE MARKED ON THE PART.
6. INTERCHANGEABILITY RELATIONSHIP: USE ONLY ASSIGNED PART NUMBERS FOR LENGTH AS LISTED IN LENGTH COLUMN OF TABLE II.
7. LOAD RATINGS: QUALIFICATION TEST DYNAMIC LOADS ARE BASED UPON THE FORMULA:
   TEST LOAD (LBS) = 37,500 PSI x BORE DIAMETER x (L + F - .13).
8. USE OF THESE BEARINGS WILL USUALLY REQUIRE OPERATION AT A LOWER STRESS LEVEL IN ORDER TO OBTAIN THE DESIRED WEAR/LIFE CHARACTERISTICS FOR A SPECIFIC APPLICATION.
9. STATIC LIMIT LOAD: ALUMINUM = 50,000 B x (L + F - .13) LBS.
   CORROSION RESISTANT STEEL = 78,500 x BORE DIAMETER x (L + F - .13) LBS.

PREPARING ACTIVITY: NAVY - AS
CUSTODIANS: ARMY-AV NAVY-
AIR FORCE-99
REVIEW: DLA-IS, NAVY-SH, AIR FORCE-84
ARMY-AR, AT, MI
PROJECT NUMBER: 3120-0743-02

MILITARY SPECIFICATION SHEET

TITLE
BEARING, SLEEVE, FLANGED, SELF-LUBRICATING, 325° F

SPECIFICATION SHEET NUMBER
MIL-B-81934/2 5 REV D DEC 94

SUPERSEDING
MIL-B-81934/2 REV C 4 JAN 88

AMSC - N/A FSC 3120

DISTRIBUTION STATEMENT A APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

DD FORM 1 MAY 88 672 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:25Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATIO SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-B-81934.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

REQUIREMENTS: (CONTINUED)

Ⓓ 10. OUTER DIAMETER CODE: ABSENCE OF THE LETTER T AND U INDICATE STD OUTER DIA (O.D.), DIMENSION ⌀D (SEE TABLE I).
" T " INDICATES .010 OVERSIZE O.D., DIMENSION ⌀D (FOR REPAIR ONLY, SEE TABLE III).
" U " INDICATES .020 OVERSIZE O.D., DIMENSION ⌀D (FOR REPAIR ONLY, SEE TABLE III).


Ⓓ 11. FINISH CODE: " P " INDICATES CORROSION RESISTANT STEEL SHALL BE ZINC-NICKEL PLATED PER AMS-2417, TYPE 2 OR CADMIUM PLATED PER QQ-P-416, TYPE II, CLASS 2 WITH A THICKNESS RANGE OF 0.0003 TO 0.0006 INCH.
ABSENCE OF LETTER " P " INDICATES:
ALUMINUM SLEEVE BEARINGS SHALL BE ANODIZED PER MIL-A-8625, TYPE I OR II;
OR CHEMICAL FILM TREATMENT PER MIL-C-5541.
CORROSION RESSISTANT STEEL BEARINGS, O.D., SHALL BE PASSIVATED PER
QQ-P-35 AND THE PROCUREMENT SPECIFICATION.

12. TEMPERATURE RANGE: -65° F TO 325° F.

NOTES:

Ⓓ 1. EXAMPLE OF PART NO.

M81934/2 -04 C 008 P T = .250 INCH NOMINAL SIZE, ZINC-NICKEL PLATED CRES BY .250 INCH LONG .010 INCH OVERSIZE O.D..

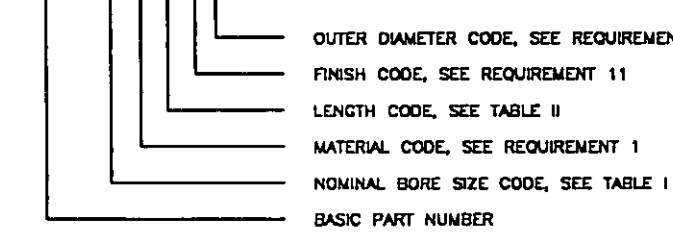

2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

3. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS DODISS SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

PREPARING ACTIVITY: NAVY - AS CUSTODIANS: ARMY-AV NAVY- AIR FORCE-99 REVIEW: DLA-IS, NAVY-SH, AIR FORCE-84 ARMY-AR, AT, MI PROJECT NUMBER: 3120-0743-02	MILITARY SPECIFICATION SHEET TITLE BEARING, SLEEVE, FLANGED, SELF-LUBRICATING, 325° F	SPECIFCATION SHEET NUMBER MIL-B-81934/2 REV D 5 DEC 94 SUPERSEDING MIL-B-81934/2 REV C 4 JAN 88 AMSC - N/A FSC 3120
		PAGE 4 OF 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:25Z
Check the source to verify that this is the current version before use.