|INCH-POUND|

MIL-V-81940/1B
30 August 1993
SUPERSEDING
MIL-V-81940/1A
31 January 1978

MILITARY SPECIFICATION SHEET

VALVE, SAMPLING AND BLEED, HYDRAULIC, TYPE II SYSTEMS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the valve described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specification and Standards (DODISS) specified in the solicitation: MIL-V-81940.

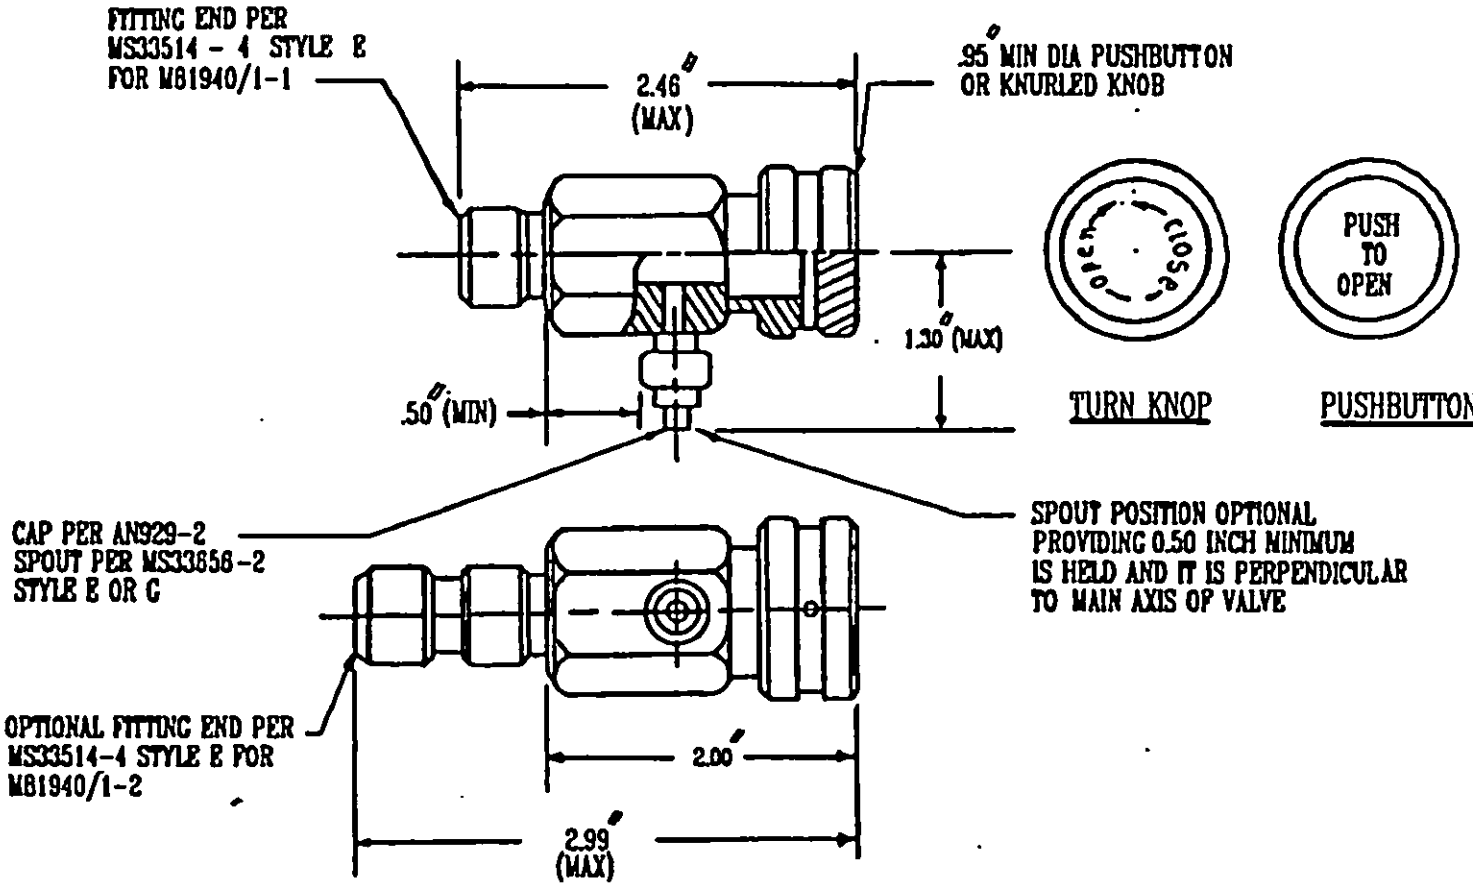


FIGURE 1. Valve configuration and dimensions.

AMSC N/A FSC 1650

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:26Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Valve shall be actuated by a rotary type knob or push button. Release of the knob or button shall automatically return the valve to the closed position. The rotary type knob shall be fully opened with a maximum rotation of 180°. The valve knob or button return mechanism shall be independent of the valve poppet allowing the valve poppet to close automatically by fluid pressure upon release or failure of the knob or button return mechanism.

2. Torque required to actuate the rotary knob type valve to a full open position shall not exceed 10 in-pounds with 3,000 psi pressure on the valve.

3. Force required to actuate the push button type valve to a full open position shall not exceed 25 lbs with 3,000 psi pressure on the valve.

4. Valve shall have a protective cap with secondary sealing provisions. Protective cap shall include a security chain or equivalent to prevent loss of the cap.

5. The part number consists of the basic number of this specification sheet plus a dash number indicating end fitting.

M81940/1-1 - Valve with end fitting per MS33514-4 style E.

M81940/1-2 - Valve with end fitting per MS33515-4 style E.

NOTES:

1. Dimensions are in inches.
2. Tolerances, decimals ± .010, angles ± 1°.
3. Surface roughness shall not exceed 125 microinches Ra per ANSI/ASME B46.1
4. Material shall be in accordance with the procurement specification.

Custodians:
Army - AV
Navy - AS
Air Force - 99

Review activities:
Navy - SH
Air Force - 71
DLA - CS

Preparing activity:
Navy - AS

(Project 1650-0506-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:26Z
Check the source to verify that this is the current version before use.