INCH-POUND


MIL-DTL-81940/1C
17 October 2019
SUPERSEDING
MIL-V-81940/1B
30 August 1993

DETAIL SPECIFICATION SHEET

VALVE, SAMPLING AND BLEED, HYDRAULIC, TYPE II SYSTEMS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-81940.

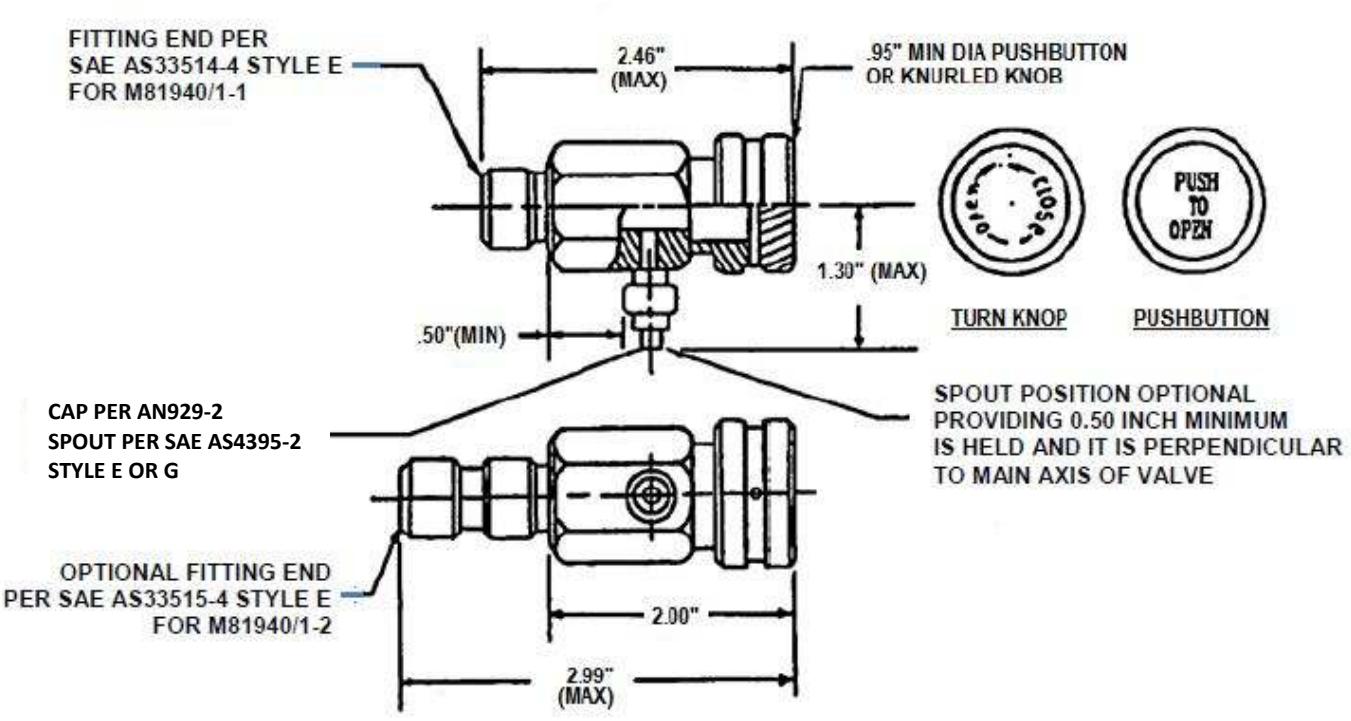

See notes at end of figure.

FIGURE 1. Valve configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:26Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.

2. Tolerance, decimals ±0.010, angles ±1º.

3. Surface roughness shall not exceed 125 microinches Ra per ASME B46.1.

4. Material shall be in accordance with the procurement specification

REQUIREMENTS:

1. Valve shall be actuated by a rotary type knob or push button. Release of the knob or button shall automatically return the valve to the closed position. The rotary type knob shall be fully opened with a maximum rotation of 180º. The valve knob or button return mechanism shall be independent of the valve poppet allowing the valve poppet to close automatically by fluid pressure upon release or failure of the knob or button return mechanism.

2. Torque required to actuate the rotary knob type valve to a full open position shall not exceed 10 in-pounds with 3,000 psi pressure on the valve.

3. Force required to actuate the push button type valve to a full open position shall not exceed 25 lbs with 3,000 psi pressure on the valve.

4. Valve shall have a protective cap with secondary sealing provisions. Protective caps shall include a security chain or equivalent to prevent loss of the cap.

5. The Part or Identifying Number (PIN) consists of an “M” prefix followed by the basic number of this specification sheet plus a dash number indicating end fitting.

M81940/1-1	-	Valve with end fitting per SAE AS33514-4 style E.
M81940/1-2	-	Valve with end fitting per SAE AS33515-4 style E.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:26Z
Check the source to verify that this is the current version before use.

Referenced documents shall be of the issue in effect on date of invitations for bid.

Referenced documents. In addition to MIL-DTL-81940, this document references the following:

AN929-2
ASME B46.1
SAE AS4395-2
SAE AS33514-4
SAE AS33515-4

CONCLUDING MATERIAL

Custodians:
Army - AV
Navy - AS
Air Force - 71

Preparing activity:
Navy - AS

(Project 4820-2019-005)

Review activities:
Navy - SH
DLA - CC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the accuracy of the information above using the ASSIST online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:26Z
Check the source to verify that this is the current version before use.