
MIL-A-55339/14
6 May 1975
SUPERSEDING
MS35368C
25 February 1966

MILITARY SPECIFICATION SHEET

ADAPTER, CONNECTOR, COAXIAL, RADIO FREQUENCY,
(WITHIN SERIES BNC), CLASS 2, RIGHT ANGLE PLUG

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the adapter described herein shall consist of this document and the latest issue of Specification MIL-A-55339.

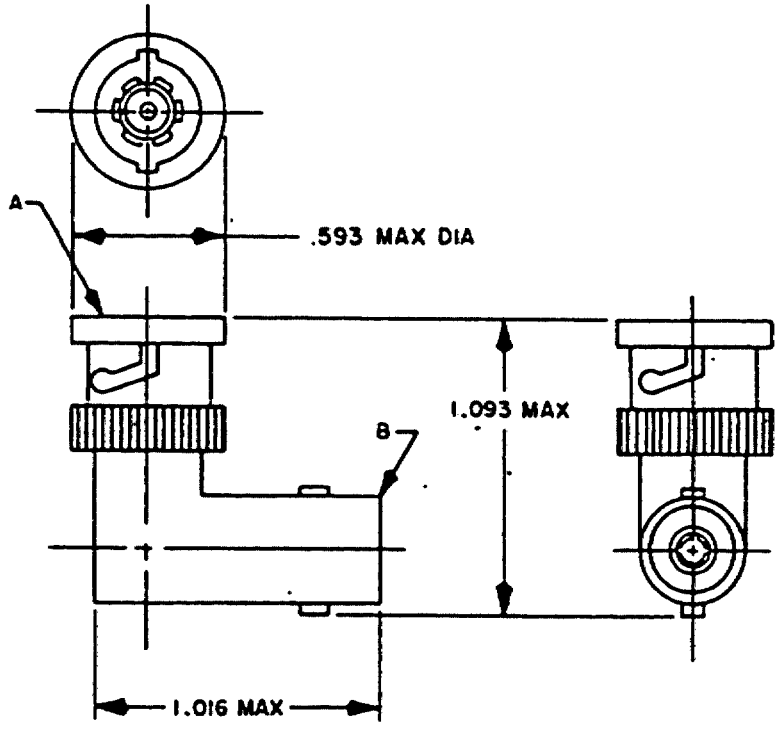

Reference	Series	Contact	Figure
A	BNC	Pin	2
B	BNC	Socket	3


INCHES	MM
.593	15.06
1.016	25.81
1.093	27.76

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. All undimensioned pictorial representations are for reference purposes only.

FIGURE 1. General configuration.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:05Z
Check the source to verify that this is the current version before use.

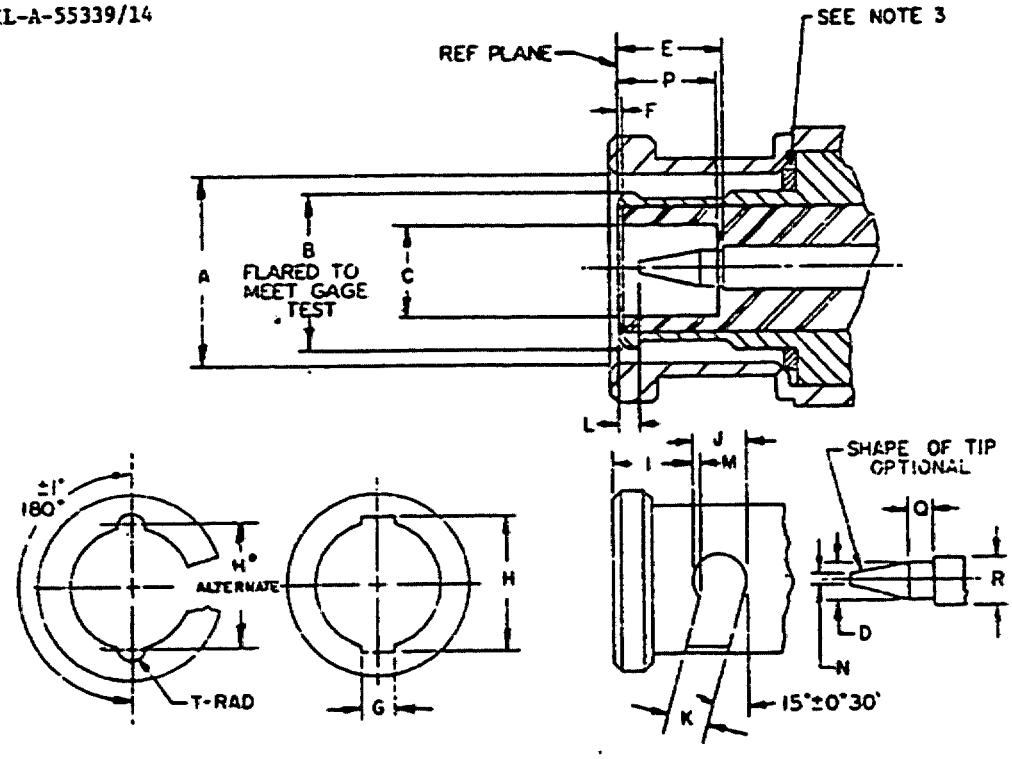



Ltr	Dimensions in inches with metric equivalents (mm) in parentheses	
	Minimum	Maximum
A	.385 (9.78)	.390 (9.91)
B	Gage test	
C	.190 (4.83)	
D	.052 (1.32)	.054 (1.37)
E	.210 (5.33)	
F	.006 (.15)	
G	.091 (2.31)	.097 (2.46)
R	.463 (11.76)	.473 (12.01)
H*	.394 (10.01)	.400 (10.16)
I	.180 (4.57)	.184 (4.67)
J	.124 (3.15)	
K	.091 (2.31)	.097 (2.46)
L	.003 (.09)	
M	.016 (.46)	.022 (.56)
N		.025 (.64)
P	.208 (5.28)	
Q	.078 (1.98)	
R	.081 (2.06)	.087 (2.21)
T	.045 (1.14)	.049 (1.24)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. In the mated condition the longitudinal force of the spring of the coupling mechanism shall exceed the pressure exerted by the sealing gasket by an amount necessary to insure butting of the outer contacts at the reference plane.
4. All undimensioned pictorial representations are for reference purposes only.
5. Outer contact shall have a minimum of four slots.

FIGURE 2. Mating dimensions for pin contact terminations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:05Z
Check the source to verify that this is the current version before use.

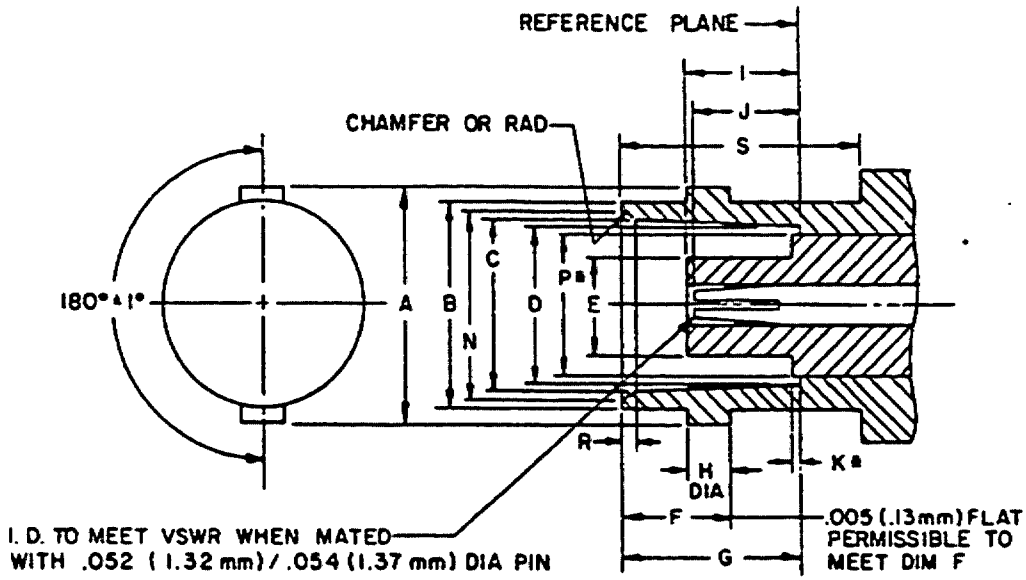



P dimension applies to that portion (if applicable) of dielectric which extends beyond reference plane by dimension K

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses	
	Minimum	Maximum
A	.432(10.97)	.436(11.07)
B	.378 (9.60)	.382 (9.70)
C	.327 (8.31)	.333 (8.46)
D	.319 (8.10)	.321 (8.15)
E	- - - -	.186 (4.72)
F	.204 (5.18)	.208 (5.28)
G	.327 (8.31)	.335 (8.51)
H	.075 (1.91)	.081 (2.06)
I	- - - -	.208 (5.28)
J	.190 (4.83)	.206 (5.23)
K*	- - - -	.006 (.15)
L	.195 (4.95)	- - - -
M	.081 (2.06)	.087 (2.21)
N	.346 (8.79)	.356 (9.04)
P*	- - - -	.256 (6.50)
R	.015 (.38)	.030 (.76)
S	.414(10.52)	- - - -

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Concave depression .100 (2.54 mm) x .005 (.13 mm) deep between studs permissible.
4. All undimensioned pictorial representations are for reference purposes only.

FIGURE 3. Mating dimensions for socket contact terminations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:05Z
Check the source to verify that this is the current version before use.

DESIGN AND CONSTRUCTION:

General configuration: See figure 1.

Impedance: 50 ohms, nom.

Working voltage: Sea level - 500 Vrms.
70,000 feet - 125 Vrms.

Frequency range: 0 to 4 GHz.

Temperature range: -65° to +165°C.

PERFORMANCE (installation torque is not applicable).

Dimensions: See figures 1, 2, and 3.

Center contact retention: Axial force - 6 lb, min.
Torque - 4 in. oz, min.

Force to engage and disengage: Longitudinal force - 3 lb, max.
Torque - 2.5 in. lb, max.

Coupling proof torque: Not applicable.

Mating characteristics:
Center contact (socket):
Oversize test pin dia - .057 in., min.
Insertion depth - .125 in., min.
No. of insertions - 1.
Max test pin (insertion force test):
Steel test pin dia - .054 in., min.
Pin finish - 16 microinches.
Insertion force - 2 lb, max.
No. of insertions - 1.
Min test pin (withdrawal force):
Steel test pin dia - .052 in., max.
Pin finish - 16 microinches.
Withdrawal force - 2 oz, min.
No. of withdrawals - Not applicable.
Outer contact:
Min test ring ID - .319 in., max.
Ring finish - 16 microinches.
Insertion force - 5 lb, max.
Insertion depth - .093 in., min.
No. of insertions - Not applicable.
Max test ring ID - .324 in., min.
Test ring finish - Not applicable.
Insertion depth - .031 in., max.
No. of insertions - Not applicable.

Permeability: <2.0.

Seal: Hermetic - Not applicable.
Pressurized - Not applicable.
Weatherproof - Not applicable.

Insulation resistance: 5,000 megohms, min.

VSWR: 1.30:1, max at .5 to 4 GHz.

RF leakage (total): Not applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:05Z
Check the source to verify that this is the current version before use.

RF insertion loss: .25 dB, max, 3 GHz
(.144 $\sqrt{F\ (GHz)}$ dB max tested at 3 GHz).

Durability: 500, min.
Rate: 12 c/m, min.

Dielectric withstanding: Test voltage - 1,500 Vrms, min (sea level).

Contact resistance (milliohms, max):

Contact	Initial	After
Center	2.5	3.0
Outer	0.5	N/A

Vibration, high frequency: Interruptions - 1 µs, max.

Shock: Test condition I.

Thermal shock: Test condition C.

Moisture resistance: 200 megohms, min.

Corona level: Voltage - 375 V, min.
Altitude - 70,000 feet, min.

RF high potential withstanding voltage: RF voltage - 1,000 Vrms, min.
Frequency - 5 MHz, min.

Salt spray (corrosion): Applicable.

Coupling mechanism retention force: 100 lb, min.

MARKING: As specified in MIL-A-55339.
Part No. M55339/14-00306.

TABLE I. Cross reference of part numbers.

Part number	Superseded part number or type designation 1/
M55339/14-00306	MS35368 UG-306B/U

1/ The superseded part number or the type designation is for cross reference only. Where a superseded part number or type designation is not given, none was assigned or will be assigned. The part number M55339/14-00306 shall be used in all cases for marking and identifying the adapter.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - MU, MI, EL
Navy - SH
Air Force - 11, 80
DSA - ES

User activities:
Army - AT
Navy - AS, MC
Air Force - 19

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5935-1918-12)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:05Z
Check the source to verify that this is the current version before use.