MIL-T-52439B(ME)
24 August 1981
SUPERSEDING
MIL-T-52439A
20 November 1975

MILITARY SPECIFICATION

TRAINING AID, ELEVATION INDICATOR, MAP READING

This specification is approved for use by the Mobility Equipment Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers an elevation indicator used for training purposes.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

FF-N-105	- Nails, Brads, Staples and Spikes: Wire, Cut and Wrought.
MM-L-751	- Lumber; Softwood.
QQ-S-781	- Strapping, Steel, and Seals.
TT-E-527	- Enamel, Alkyd, Lustreless.
MMM-A-125	- Adhesive, Casein-Type, Water and Mold Resistant.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.

FSC 6910

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:18Z
Check the source to verify that this is the current version before use.

PPP-B-636	- Boxes, Shipping, Fiberboard.
PPP-F-320	- Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.

MILITARY

MIL-T-704	- Treatment and Painting of Materiel.

STANDARDS

FEDERAL

FED-STD-595	- Colors.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-1188	- Commercial Packaging of Supplies and Equipment.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Description. The indicator shall be as shown in Figure 1 and as specified herein.

3.2 Material. Material shall be as specified herein (see 6.3).

3.3 Fabrication. The indicator panel and pointers shall be softwood conforming to MM-L-751, species optional, and shall be assembled as shown in Figure 1 using adhesive conforming to MMM-A-125, Type I and brads conforming to FF-N-105, 0.035 inch diameter, 0.50 inch long.

3.4 Treatment and painting. The indicator shall be cleaned, treated, and painted in accordance with MIL-T-704, Type A, Color No. 37875, in accordance with FED-STD-595.

3.5 Marking. The indicator shall be marked as shown in Figure 1 with lusterless enamel conforming to TT-E-527, Composition G, Color No. 37038, in accordance with FED-STD-595.

3.6 Workmanship. Edges and surfaces shall be free of cracks and splinters. The paint shall be smooth and continuous and the brads shall not protrude.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:18Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Material inspection. The contractor is responsible for insuring that materials used are manufactured, examined, and tested in accordance with referenced specifications and standards, as applicable.

4.2 Classification of inspections. Inspection requirements specified herein are classified as follows:

(a) Quality conformance inspection (see 4.3).
(b) Inspection of packaging (see 4.5).

4.3 Quality conformance inspection.

4.3.1 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.3.2 Examination. Samples selected in accordance with 4.3.1 shall be examined for the defects specified in 4.4.1. AQL shall be 2.5 percent defective for major defects and 4.0 percent defective for the minor defect.

4.4 Inspection procedure.

4.4.1 Examination. The indicator shall be examined as specified herein for the following defects:

Major

101. Materials not as specified.
102. Dimensions not as specified.
103. Components missing or not assembled as specified.
104. Treatment and painting not as specified.
105. Marking not as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:18Z
Check the source to verify that this is the current version before use.

Minor

201. Workmanship not as specified.

4.5 Inspection of packaging.

4.5.1 Quality conformance inspection of pack.

4.5.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.5.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.5.1.3 Examination. Samples selected in accordance with 4.5.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

106. Materials and containers not as specified for Level A or Level B. Each incorrect material or container shall constitute one defect.
107. Quantities packaged together exceed the weight limitation of the box specification for Level A.
108. Indicators not separated by pads as specified for Level A.
109. Box not closed and sealed as specified for Level A.
110. Strapping not as specified for Level A.
111. Gross weight exceeds the limitation of the box specification for Level B.
112. Boxes not reinforced with tape as specified for Level B.
113. Marking missing, illegible, incorrect, or incomplete.

5. PACKAGING

5.1 Preservation. Preservation shall be Level A or Commercial, as specified (see 6.2).

5.1.1 Level A. The indicators shall be preserved together in a close-fitting box conforming to PPP-B-636, W6c or W5c, in quantities not to exceed the weight limitation of the box specification. The indicators shall be separated from each other by pads of fiberboard conforming to PPP-F-320, Type CF, Class Weather Resistant, Variety SW, Grade W6c. The box shall be closed and sealed as specified for Method V in the appendix to the box specification.

5.1.2 Commercial. Commercial preservation shall be in accordance with MIL-STD-1188.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:18Z
Check the source to verify that this is the current version before use.

5.2 Packing. Packing shall be Level A, Level B, or Commercial, as specified (see 6.2).

5.2.1 Level A. Preserved indicators shall be packed in a close-fitting box conforming to PPP-B-601, Overseas Type, Grade B, style optional. The boxes shall be closed and strapped in accordance with the appendix to the box specification. Strapping shall conform to QQ-S-781, Class 1, Type I or IV, size as applicable; and, unless otherwise specified herein, strapping shall be Finish B. When specified (see 6.2), strapping shall be Finish A.

5.2.2 Level B. Preserved indicators shall be packed together in close-fitting boxes conforming to PPP-B-636, V3c or V3s, style optional. The gross weight shall not exceed the weight limitation of the box specification and the boxes shall be reinforced with bands of reinforced tape in accordance with the appendix to the box specification.

5.2.3 Commercial. Commercial packing shall be in accordance with MIL-STD-1188.

5.3 Marking. Marking for military levels of protection shall be in accordance with MIL-STD-129. Commercial marking shall be in accordance with MIL-STD-1188.

6. NOTES

6.1 Intended use. The indicator is a component of a map reading set and is intended to be used to indicate contour line elevations. The set is used as an aid in teaching basic map reading.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Degree of preservation and degree of packing required (see 5.1 and 5.2).
(c) When strapping shall be Finish A (see 5.2.1).

6.3 Recycled material. It is encouraged that recycled material be used, when practical, as long as it meets the requirements of this specification (see 3.2).

Custodian:
Army - ME

Preparing activity:
Army - ME

Project 6910-0409

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:18Z
Check the source to verify that this is the current version before use.

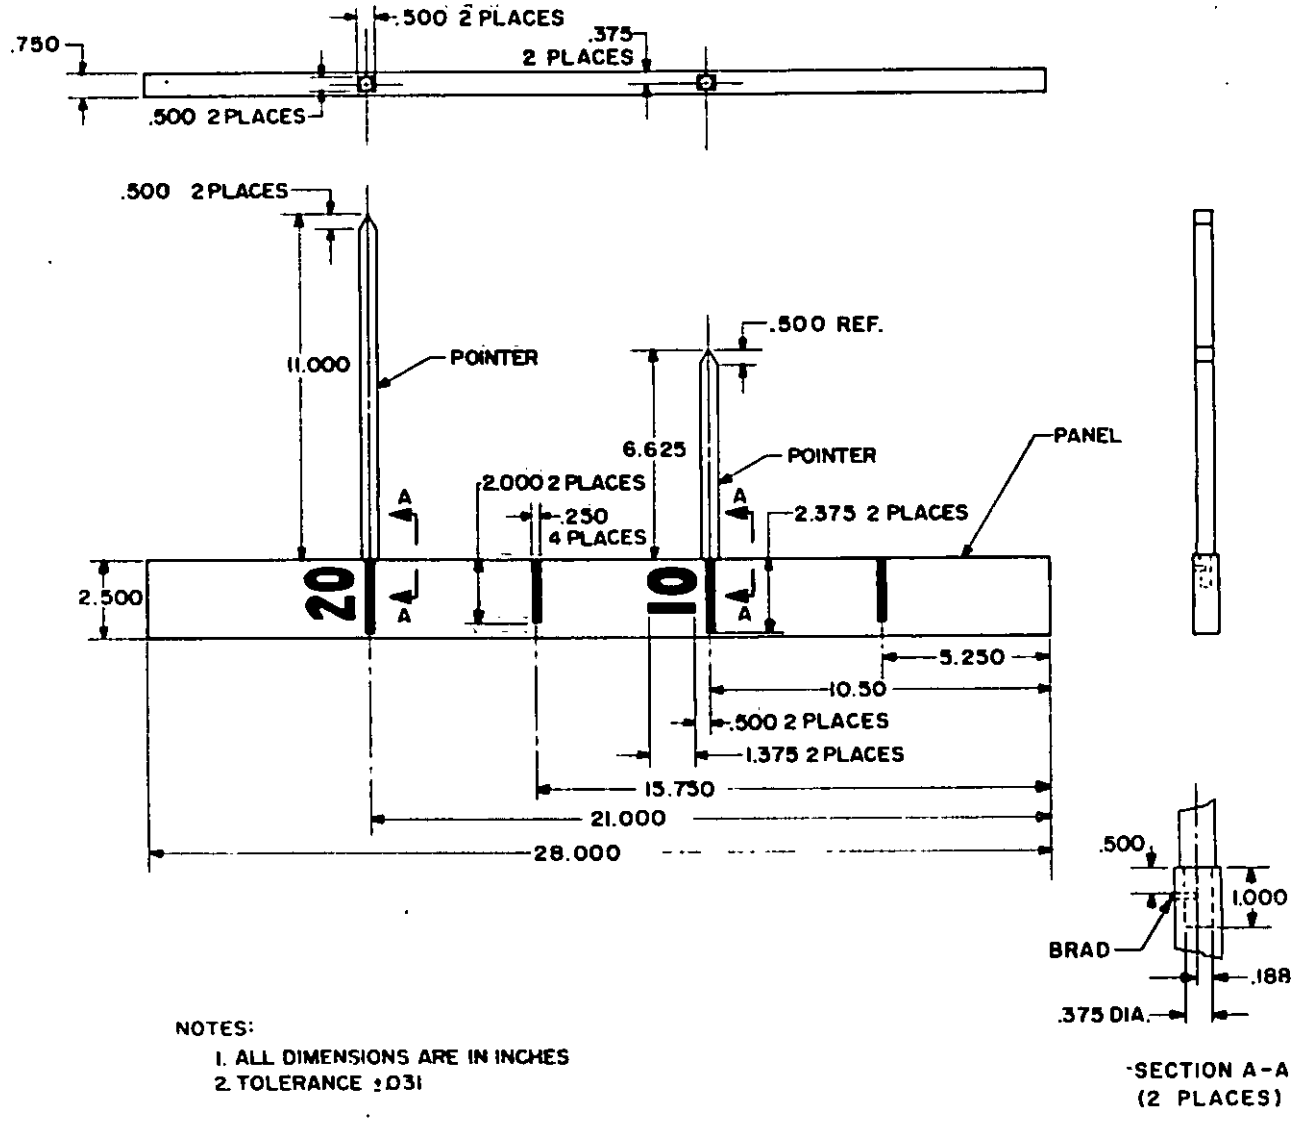


FIGURE 1. Elevation indicator.

X-3025A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:18Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Mobility Equipment Research and
Development Command
ATTN: DRDME-DS
Fort Belvoir, VA 22060

FOLD

☆ U.S. GOVERNMENT PRINTING OFFICE: 1981—703-023/6338 8-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:18Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-T-52439B(ME) Training Aid, Elevation Indicator, Map Reading

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:18Z
Check the source to verify that this is the current version before use.