
This military standard is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

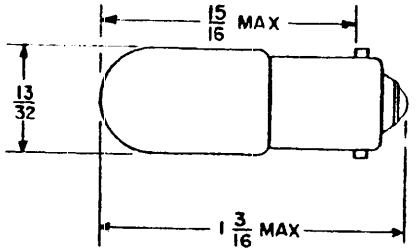

MS part number	Industry number	Amperes	Volts	Light center length 1/	Finish	Hours life approximate	Approximate candlepower
MS15571-1	44	0.25	6.3	Inch 25/32	Clear	3000	0.90
MS15571-2	47	.15	6.3	25/32	Clear	3000	.52
MS15571-3	1806	.15	5.1	1/2	Clear	100	.50
(F)							
MS15571-5	1809	.06	2	3/4	Clear	1000	.02
(F)							
MS15571-7	44R	.25	6.3	25/32	Red	3000	---
MS15571-8	1815	.20	14	3/4	Clear	3000	1.40
2/ MS15571-9	1810	.40	6.3	23/32	Clear	3000	1.50
MS15571-10	1819NR	.07	28	5/8	Natural Red	1000	---
MS15571-11	45	.35	3.2	25/32	Clear	3000	0.50

1/ Distance from center of light source to top of base pins.

2/ Maximum overall length, 1-1/8 inches.

(F) Part numbers 4 and 6 have been superseded by MS25231: Part no. 4 - MS25231-313; part no. 6 - MS25231-1819.

(F) Entire standard revised

APPROVED 21 SEP 1954 REVISED (F) 3 APR 1978

FED. SUP CLASS 6240

PROCUREMENT SPECIFICATION: None

SUPERSEDES: MS15813

INTERNATIONAL INTEREST

P A: GSH

TITLE: LAMPS, INCANDESCENT, T-3-1/4, MINIATURE BAYONET, SINGLE CONTACT

MILITARY STANDARD

MS15571(SH)

Page 1 OF 1

DD FORM 672-1 (LIMITED COORDINATION)

6240-N256

☆ U.S. GOVERNMENT PRINTING OFFICE 1978-703-122/1964

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:49Z
Check the source to verify that this is the current version before use.