DISTRIBUTION STATEMENT A Approved for Public Release; Distribution is unlimited

FED. SUP CLASS
6140

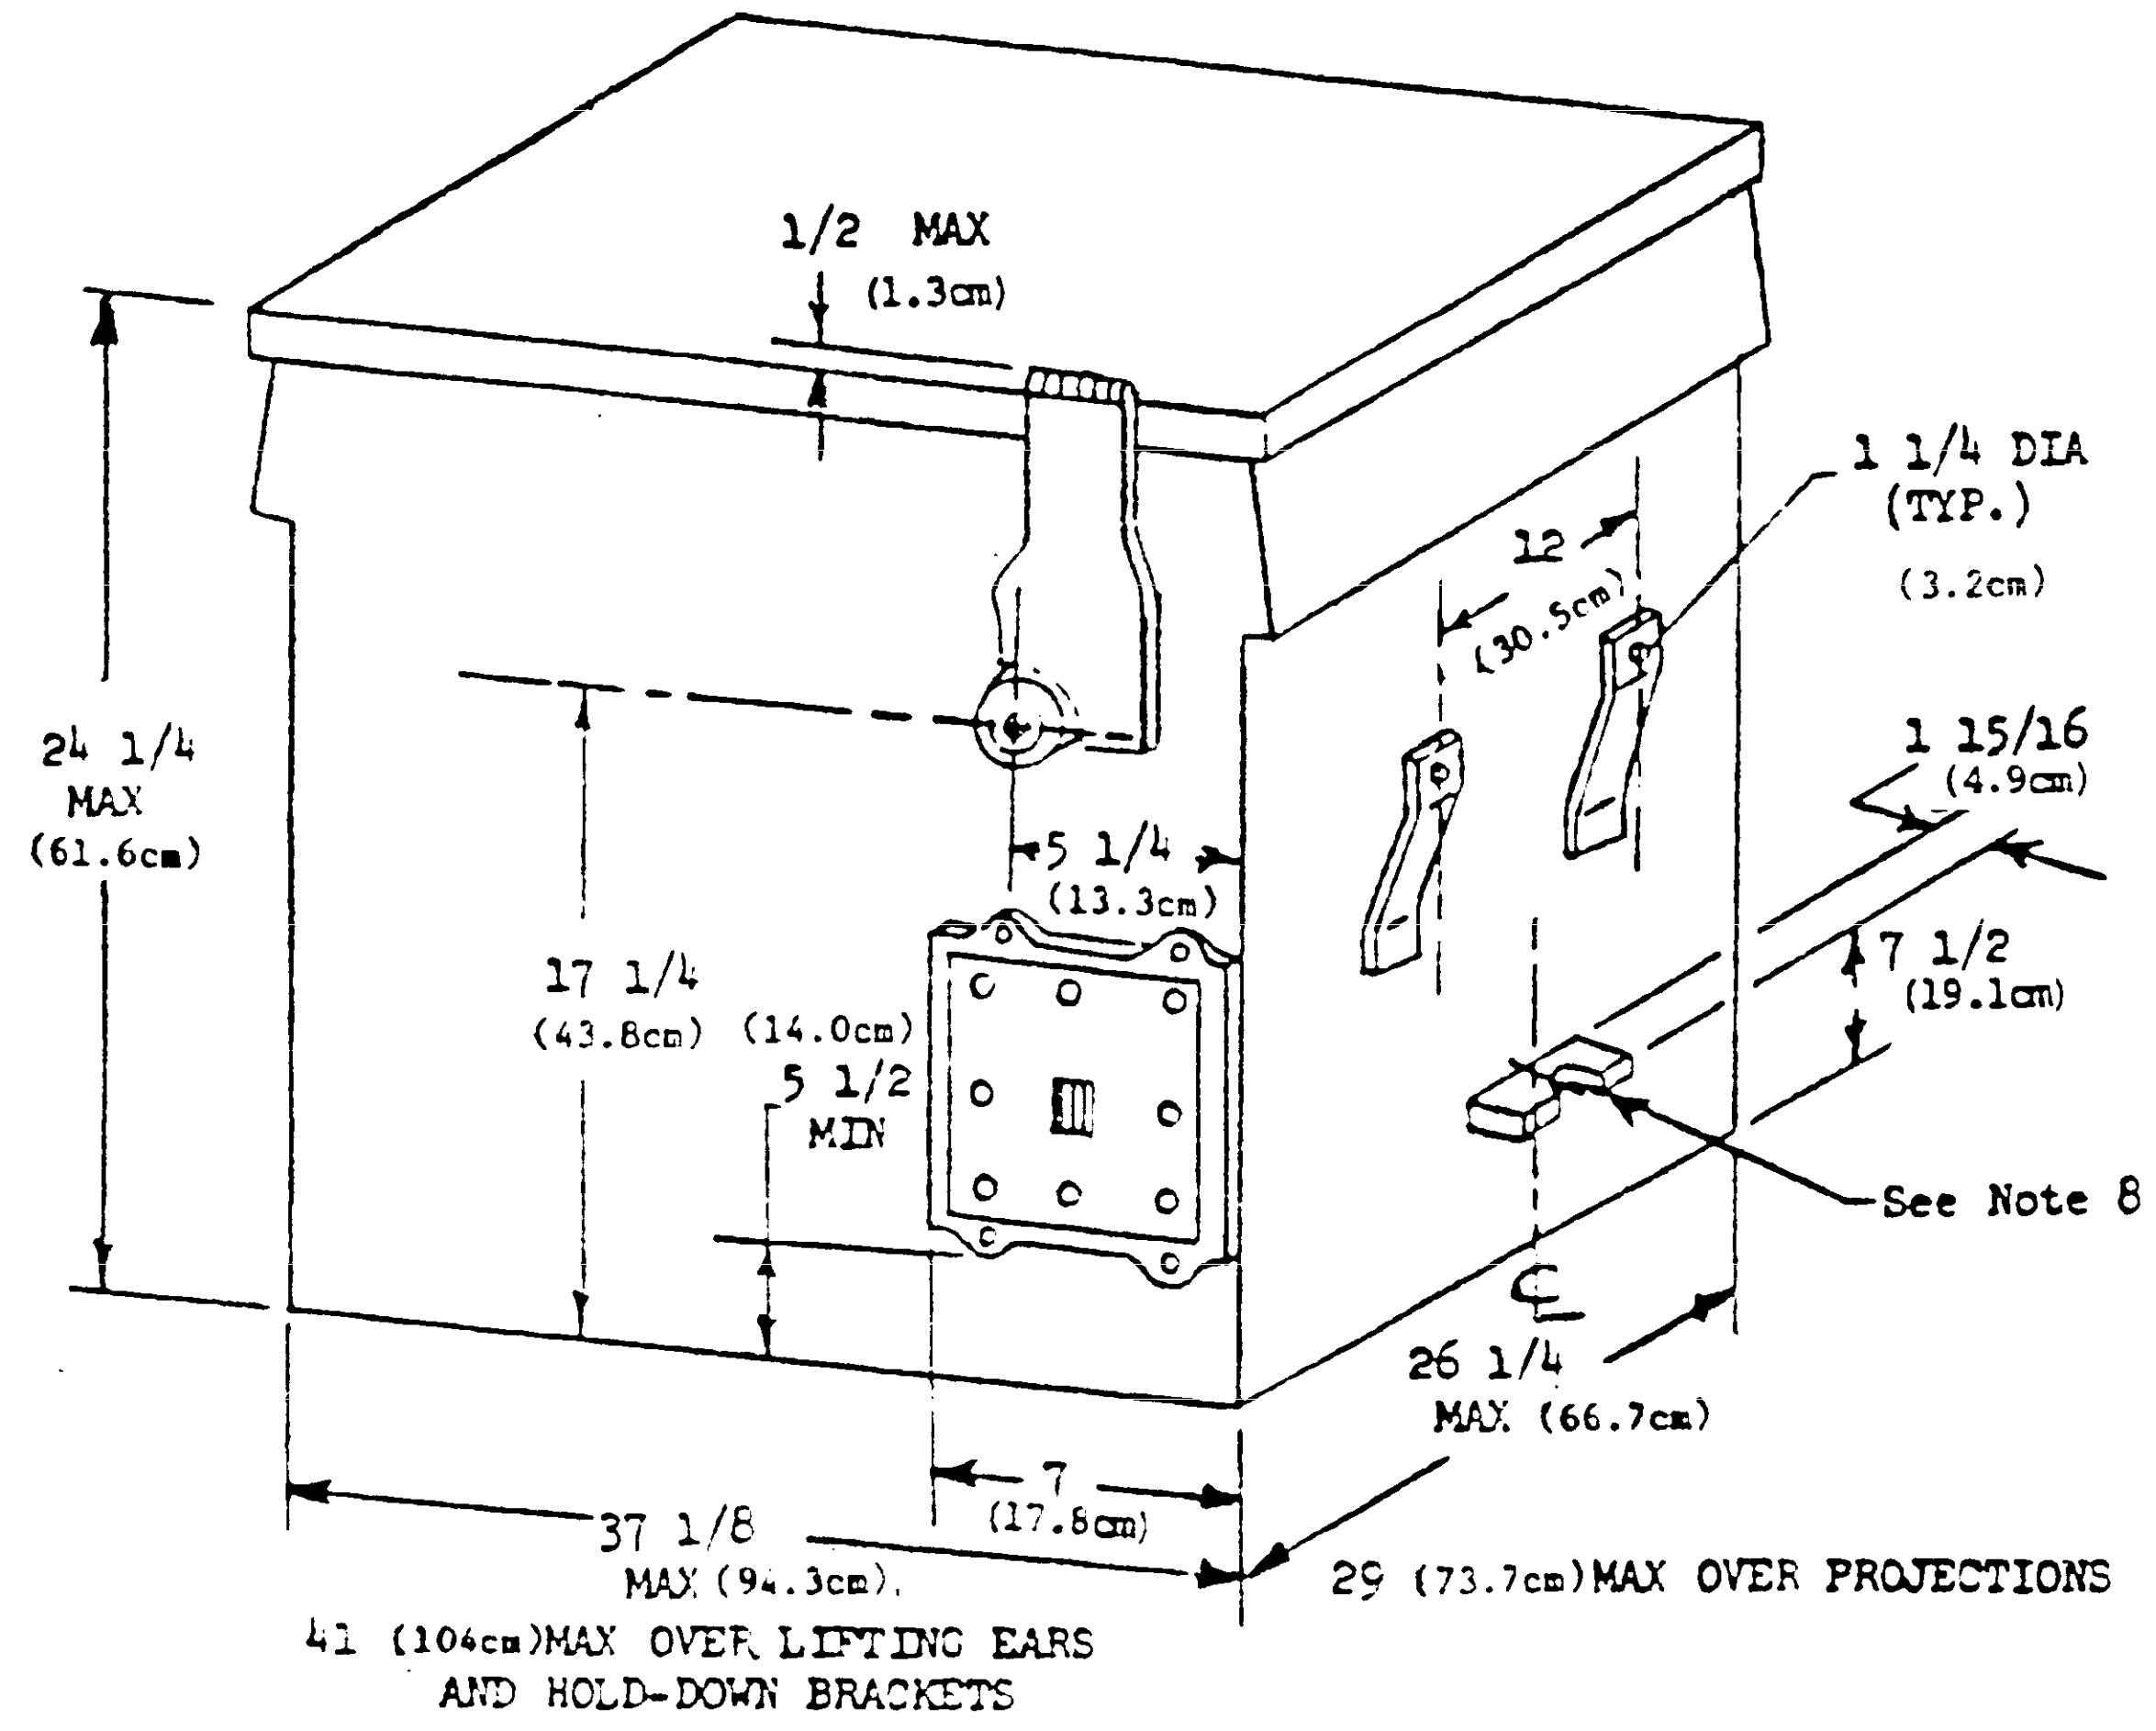

1. 36 volts nominal, 18 cells, 19 plates, 765 ampere-hours capacity (minimum) at 6 hour rate, 26.70 kilowatt-hour capacity (minimum). Service weight filled 2475 pounds (1114 kg) (maximum).
2. All dimensions are +/-$^1/_8$ inch (.3 cm) tolerance unless otherwise specified.
3. Explosion protected design - Underwriters' Laboratories "EX", Class 1, Group D.
4. Anderson, Type N150, 3 contact charging receptacle.
5. Auxiliary third wire circuit connected to battery positive.
6. For use with 4,000 (1800 kg) and 6,000 (2700 kg) pound capacity fork lift trucks, type "EX".
7. Combination fuse compartment with interlock acceptable, providing that receptacle center-line is maintained.
8. Hold-down slots shall be 1" (2.5cm) wide to accept $^3/_4$" (1.9cm) minimum diameter bolts on 39-$^3/_8$" (100.0cm) centers.

This military standard is approved by the Department of the and shall be used by that activity. All other military activities are required to employ this standard where suitable

APPROVED 12 FEB 69 REVISED Ⓐ 18 JUL 86

P. A. NAVY - SA
Other Cust.
ARMY - ER
AIR FORCE - 99

INTERNATIONAL INTEREST

TITLE
BATTERY, STORAGE, TYPE "EX" FOR 4,000 (1800kg)
AND 6,000 (2700kg) POUND CAPACITY,
FORK LIFT TRUCKS.

MILITARY STANDARD
MS 16974

PROCUREMENT SPECIFICATION
W-B-133

SUPERSEDES: 12 February 1969

SHEET 1 OF 1

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:01Z
Check the source to verify that this is the current version before use.