
FED SUP CLASS
5935

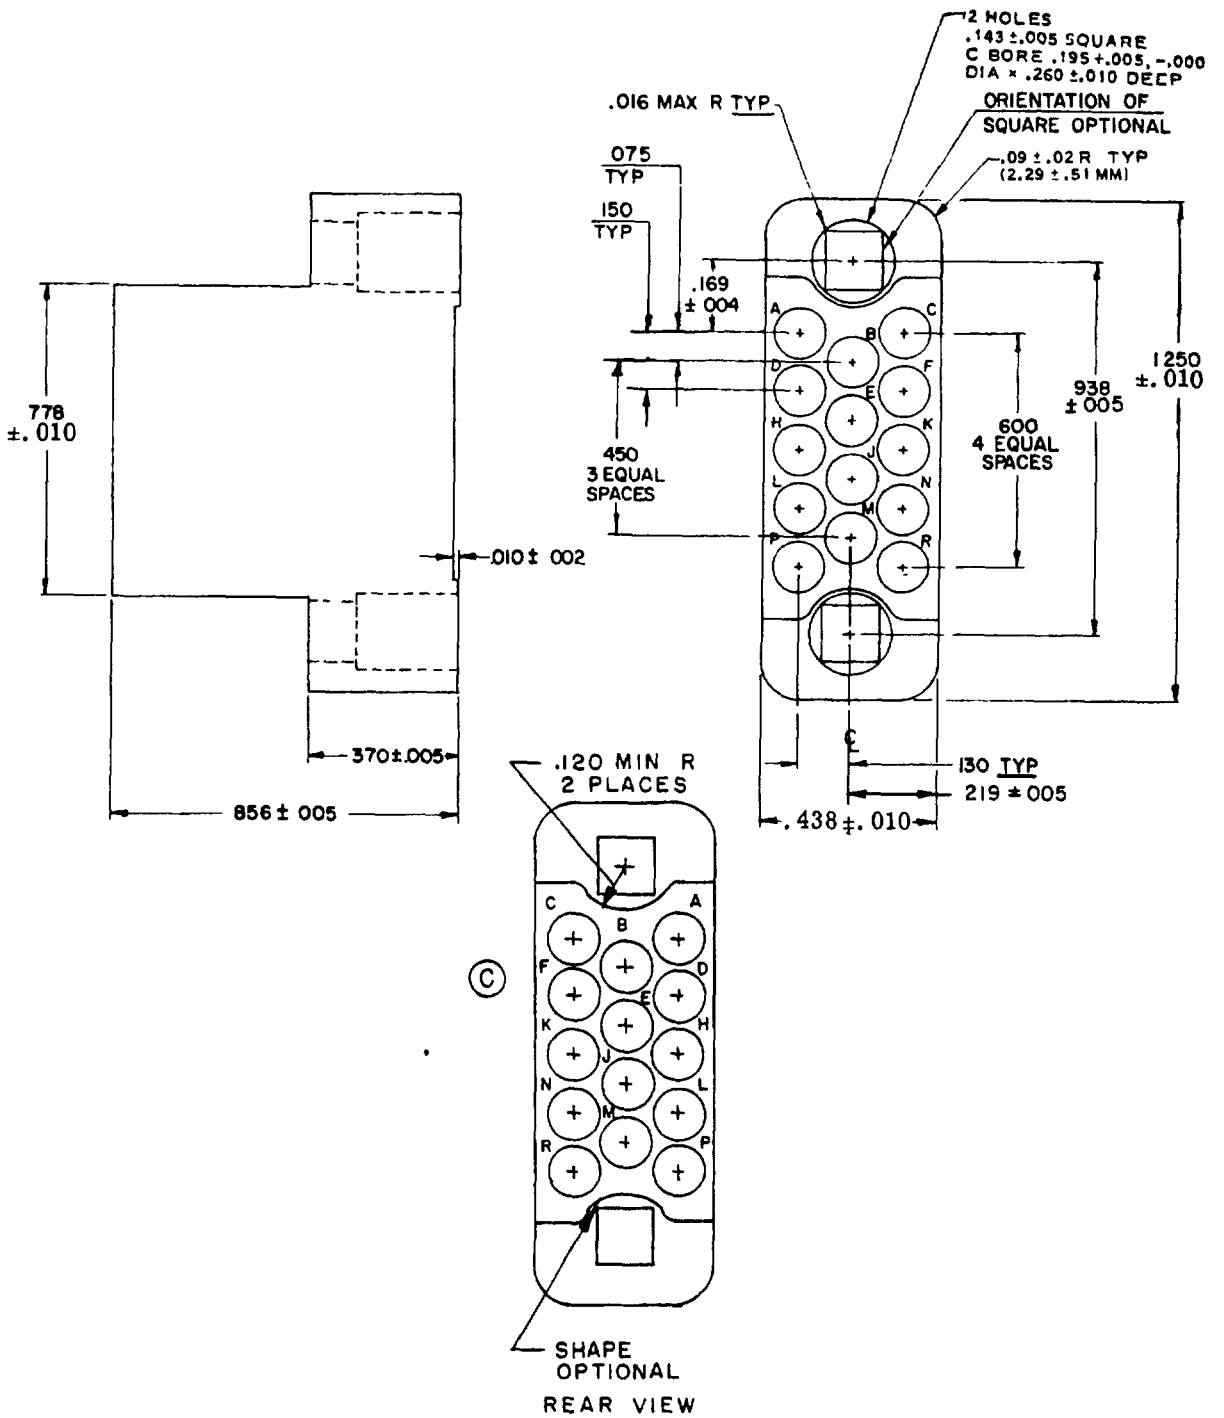

MS Part No. MS18175-1

DESIGN STANDARD FOR USE WITH MIL-C-28748/4.

Ⓒ denotes changes

P A Navy - EC Other Cust AF - 85 Army - CR	International Interest	TITLE Insert (insulator) rectangular connector, electrical, 14 (size 16 and 20 crimp removable) socket contacts	MILITARY STANDARD MS 18175
Procurement Specification MIL-C-28748		SUPERSEDES	PAGE 1 OF 2

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-3223-3

APPROVED 20 Dec. 1965 REVISED (A) 20 MAY 1970 (B) 23 JUN 1972 (C) 2 August 1982

User activities: Army - ME, AM, AR; Navy - MC, OS, SH, YD; Air Force -

Review activities: Army - MI, AT; Navy - AS; Air Force - 11, 99; DLA-ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:16Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

User activities: Army - ME, AM, AR; Navy - MC, OS, SH. YD; Air Force -

Review activities: Army - MI, AT; Navy - AS; Air Force - 11, 99; DLA-ES

FED. SUP CLASS 5935

APPROVED 20 Dec. 1965 REVISED (A) 20 May 1970 (B) 23 Jun 1972 (C) 2 August 1982

INCHES	MM
.002	.05
.004	.10
.005	.13
.010	.16
.016	.41
.02	.51
.075	1.91
.09	2.29
.120	3.06
.130	3.30
.143	3.63
.150	3.81
.169	4.29
.195	4.95
.219	5.56
.229	5.82
.260	6.60
.370	9.40
.438	11.13
.450	11.43
.51	12.95
.600	15.24
.778	19.76
.856	21.74
.938	23.83
1.250	31.75

NOTES.
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.015(.38 mm).
3. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
4. Tolerance between any two adjacent contact centers shall be ±.004(.10 mm). Tolerance between any two contact centers, other than adjacent contacts, shall be ±.006(.15 mm).
5. Contact identification may be located on either side of the contact hole but shall appear on the front and rear of each insert.
6. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
7. Referenced documents shall be of the issue in effect on date of invitation for bid.
8. Designed for use with MIL-C-39029/35 contacts
9. Contact hole details shall be in accordance with MIL-C-28748.
10. The maximum insertion and withdrawal force (connector assembly) shall be 17.5 pounds.
11. Insert material shall be in accordance with MIL-C-28748.

P A Navy - EC Other Cust A F - 85 Army - CR	International Interest	TITLE Insert (insulator) rectangular connector, electrical, 14 (size 16 and 20 crimp removable) socket contacts	MILITARY STANDARD MS18175
Procurement Specification MIL-C-28748		SUPERSEDES	PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:16Z
Check the source to verify that this is the current version before use.