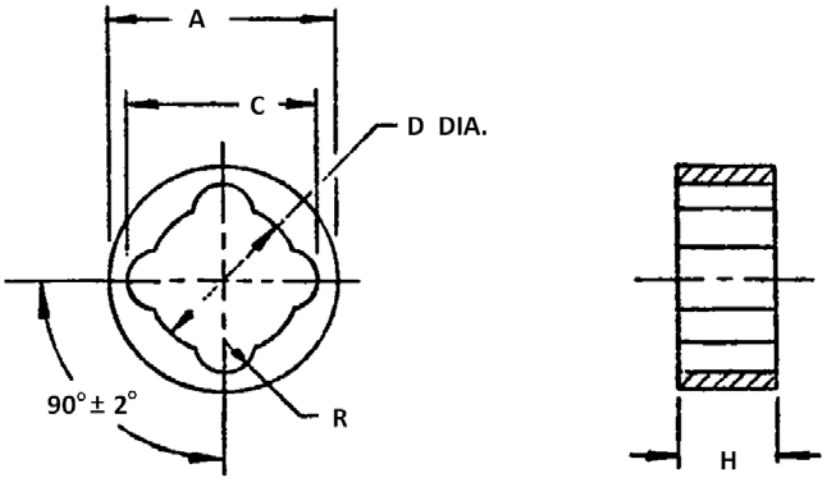


DASH NO.	NOMINAL BOLT SIZE	A		D		C		H		R	
		MAX.	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	MIN,
3	.1900	.448	.428	.205	.195	.255	.235	.153	.143	.055	.035
4	.2500	.510	.490	.265	.255	.324	.304	.191	.181	.070	.050
5	.3125	.572	.552	.327	.317	.410	.390	.233	.223	.086	.066
6	.3750	.635	.615	.390	.380	.475	.455	.248	.238	.094	.074
7	.4375	.760	.740	.452	.442	.544	.524	.287	.277	.102	.082
8	.5000	.885	.865	.515	.505	.629	.609	.319	.309	.119	.099
9	.5625	.947	.927	.578	.568	.701	.681	.359	.349	.134	.114

MATERIAL: ALUMINUM ALLOY QQ-A-250/4 OR QQ-A-250/5

HEAT TREATMENT: CONDITION T-4 MIN.

PROTECTIVE TREATMENT: ANODIZE PER MIL-A-8625.

SURFACE FINISH: 125√ IN ACCORDANCE WITH USAS B 46.1-1962.

DIMENSIONS: WASHER FACES SHALL BE PARALLEL WITHIN 0.002 INCH.
WASHER FACES SHALL BE FLAT WITHIN 0.007 INCH FOR DASH NUMBER 3 THRU 8, AND FLAT WITHIN 0.010 INCH FOR DASH NUMBER 9.

DESIGN USAGE: THESE SPACERS ARE FOR USE WITH SELF-RETAINING BOLTS; FOR DESIGN AND USAGE LIMITATIONS SEE MS33602.

EXAMPLE OF PART NUMBER: MS21126-3 SPACER, GROOVED, FOR No. 10 SIZE SELF RETAINING BOLT.

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED.

BREAK SHARP EDGES AND REMOVE BURRS AND SLIVERS.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

REVIEWER ACTIVITIES:
NAVY - AS
USAF - 11

APPROVED 27 Oct 67 REVISED

This military standard is approved by the Department of the Air Force and the Bureau of Naval Weapons and is mandatory for the use by these activities. All other military activities are required to employ this standard where suitable.

P.A. NAVY – AS Other Cust. USAF – 11	TITLE **SPACER, GROOVED, SELF-RETAINING BOLT, ALUMINUM ALLOY**	**MILITARY STANDARD** **MS21126(ASG)**
PROCUREMENT SPECIFICATION None	SUPERSEDES	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:27Z
Check the source to verify that this is the current version before use.