This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - Navy - AS Air Force - 99, 71

User activities: Army - Navy - Air Force - 71

FED. SUP CLASS
5935

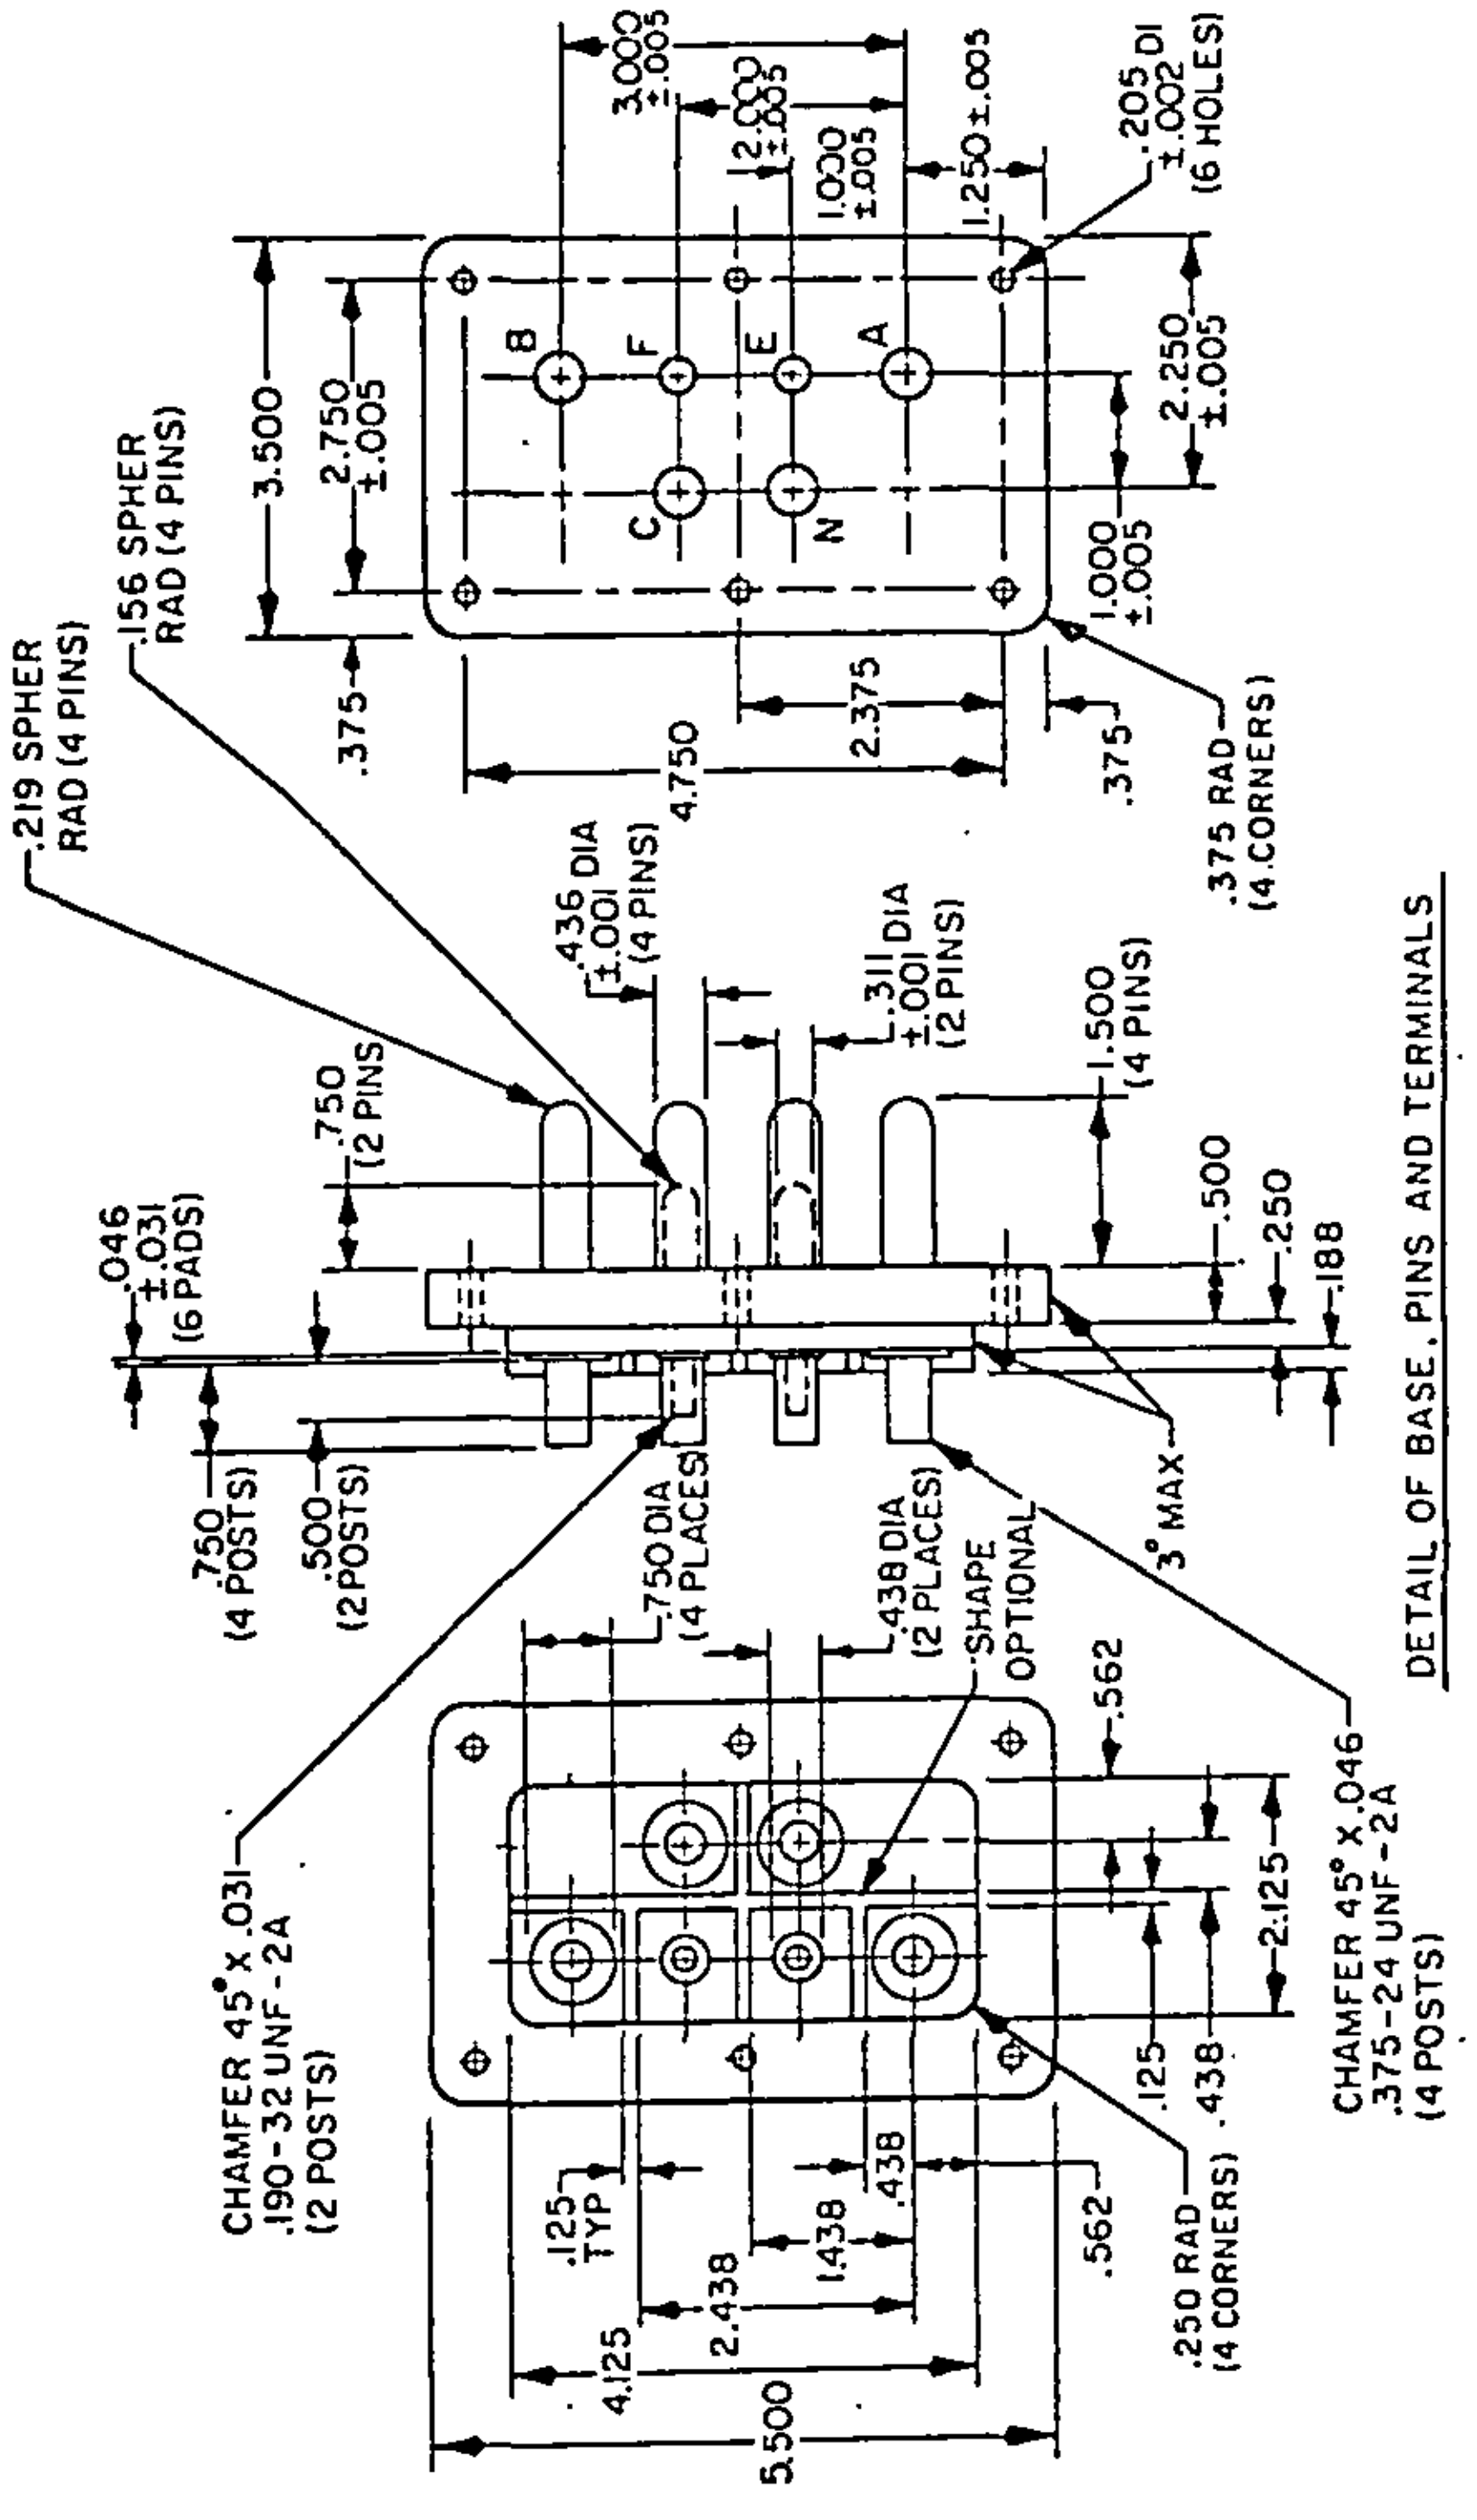

DETAIL OF BASE, PINS AND TERMINALS

REVISED Ⓐ 24 JUL 87

APPROVED 12 JAN 73

Ⓐ DENOTES CHANGES

P.A - 85 Other Cust - AS	International interest	TITLE CONNECTOR, RECEPTACLE, EXTERNAL POWER, AIRCRAFT, 230/400 VOLT, 400 Hz	MILITARY STANDARD MS 21379
Procurement Specification MIL-C-81790		SUPERSEDES:	PAGE 1 OF 2

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-3647

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:37Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

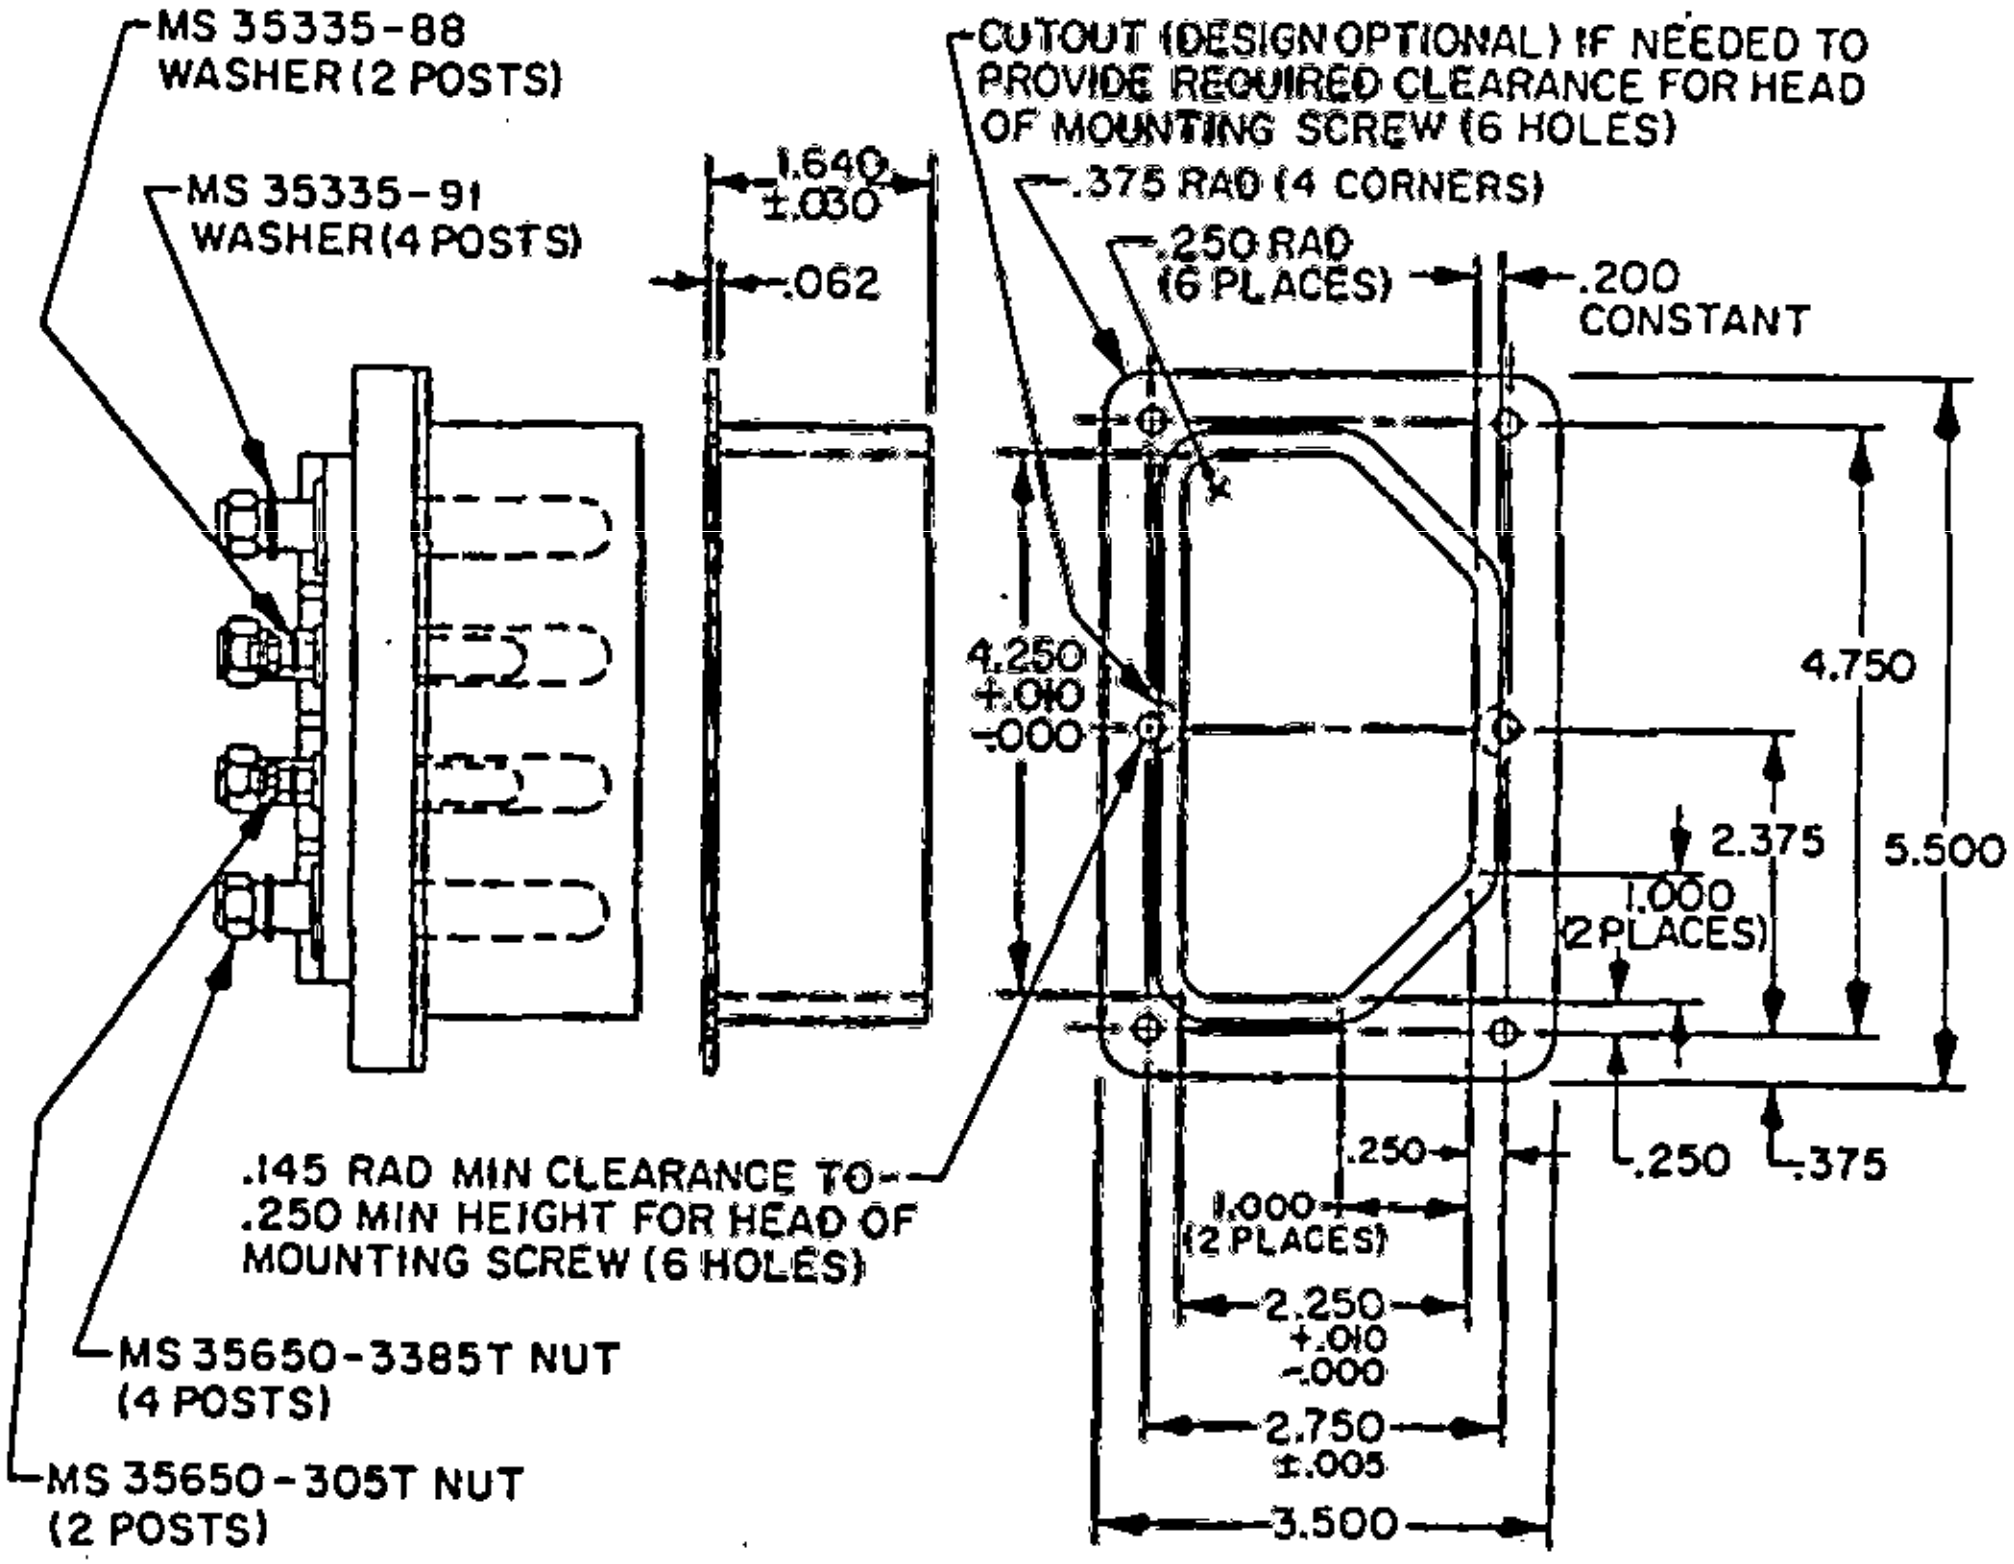

SHIELD, EXTERNAL POWER RECEPTACLE

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ± .015.
Ⓐ3. Use: This receptacle and shield shall meet the design requirements and quality assurance provisions of MIL-C-81790.
4. This receptacle and shield is designed to fit and mate with plug MS21378.
Ⓐ5. Shield material - as required by MIL-C-81790 for shields for three (3) contact receptacles.
Ⓐ6. Fluid immersion test -
   a. Liquid coolant - dielectric fluid synthetic silcate ester base (Coolanol 25 or equivalent).
   b. Hydraulic fluid NR specification
      (chevron M2V) ST1045LB0001 or equivalent
   Immersion time shall be 5 minutes. Remove 24 hours ± 2 hours. Repeat for 5 cycles.
   c. Oil per MIL-L-23699 { Immerse one sample in each for 20 ± 1 hour.
   d. JP-4 per MIL-T-5624 { Remove and wipe free of fluids.
7. Terminals shall be marked on both front and back of receptacle dielectric. Location of marking optional.
Ⓐ8. For torgue values see MIL-C-81790.
9. Impact test: The impact test of the specification shall be performed on the shield, with the impact applied to the center of one of the longer edges, perpendicular to the surface of the side.
10. For design festure purposes, this standard takes precedence over procurement documents referenced herein.
11. Referenced documents shall be of the issue in effect on date of invitation for bids.

APPROVED 12 JAN 73 REVISED Ⓐ FOR CHANGES SEE PAGE 2

P.A - 85
Other Cust - AS

International Interest

TITLE
CONNECTOR, RECEPTACLE,
EXTERNAL POWER,
AIRCRAFT, 230/400 VOLT, 400 Hz

MILITARY STANDARD
MS21379

Procurement Specification
MIL-C-81790

SUPERSEDES:

PAGE 2 OF 2

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army -
Navy - AS
Air Force - 99, 71

User activities: Army -
Navy -
Air Force - 71

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:37Z
Check the source to verify that this is the current version before use.