
FED. SUP CLASS
4730

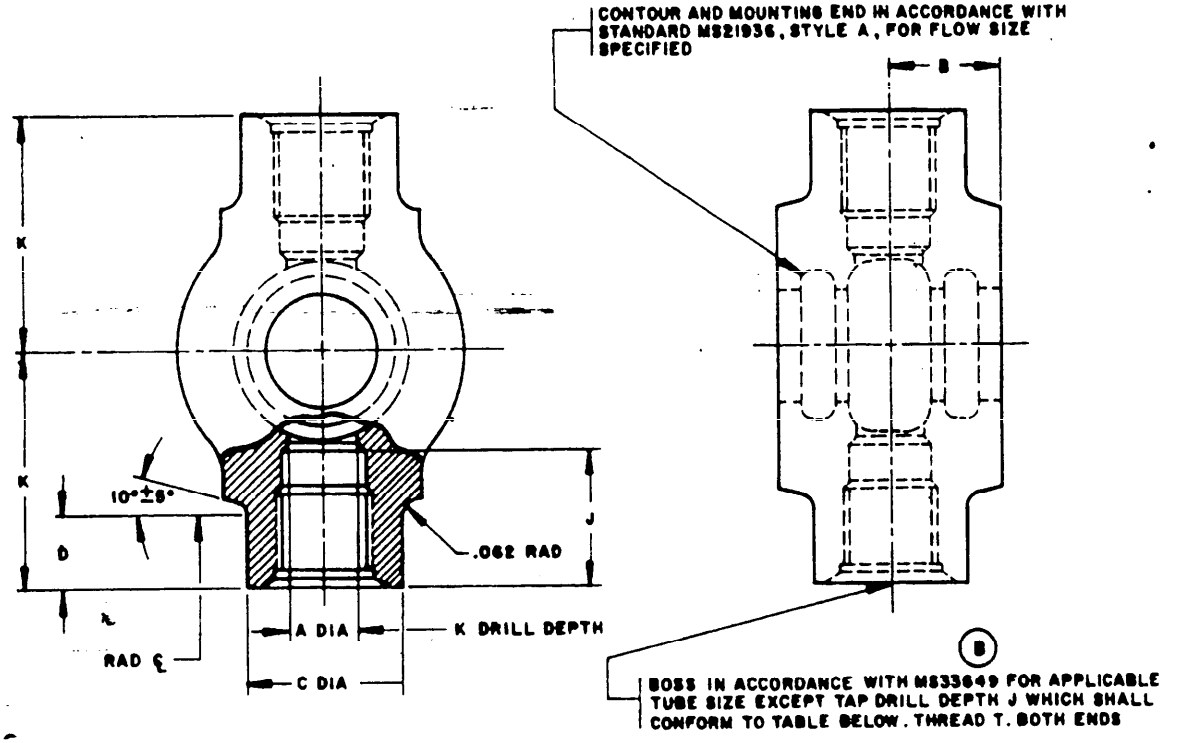

LOW FLOW SIZE DASH NUMBER	TUBE OD	THREAD T REF	A	B	C ±.031	D ±.031	J	K
-4L	1/4	7/16-20 UNF-3B	.312	.500	.688	.406	.625	1.062
-5L	5/16	1/2-20 UNF-3B	.344		.750	.438		1.094
-6L	3/8	9/16-18 UNF-3B			.812	.469		1.125

HIGH FLOW SIZE DASH NUMBER	TUBE OD	THREAD T REF	A	B	C ±.031	D ±.031	J	K
-4H	1/4	7/16-20 UNF-3B	.312	.594	.688	.297	.625	1.219
-5H	5/16	1/2-20 UNF-3B	.375		.750	.312		1.250
-6H	3/8	9/16-18 UNF-3B	.406		.812	.375		1.312
-8H	1/2	3/4-16 UNF-3B	.422		1.125	.625	.750	1.500

(B) MATERIAL: ALUMINUM-ALLOY EXTRUSION, 24S, SPECIFICATION QQ-A-200/3, TEMPER T4, ARTIFICIALLY AGED.
ALUMINUM-ALLOY FORGING, 2014, SPECIFICATION QQ-A-367, COMPOSITION 5, TEMPER T6.

FINISH: SEE PROCUREMENT SPECIFICATION.

ALL MACHINED SURFACES FINISHED TO 250 RHR MAX, EXCEPT AS NOTED.

(B) FITTINGS SHALL BE FREE FROM ALL HANGING BURRS AND SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE.
SURFACE FINISH IN ACCORDANCE WITH STANDARD ASA B46.1.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ± .010, ANGLES ± 1/2°.

INSTALLATION IN ACCORDANCE WITH STANDARD MS21931.

* FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(B)

APPROVED 20 NOV 57 REVISED (A) 12 JAN 62 (B) 29 JUL 75

P.A. AIR FORCE — 82 Other Cust NAVY — AS	TITLE BODY, CLUSTER FITTING, TWO-WAY, 180°, INTERNAL BOSS	MILITARY STANDARD MS 21958
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 1 OF 1

User activities:

Review activities:
DSA --

is military standard is approved for use by all Departments and Agencies
the Department of Defense. Selection for all new engineering and design
plication and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:42Z
Check the source to verify that this is the current version before use.