
FED. SUP CLASS
6240

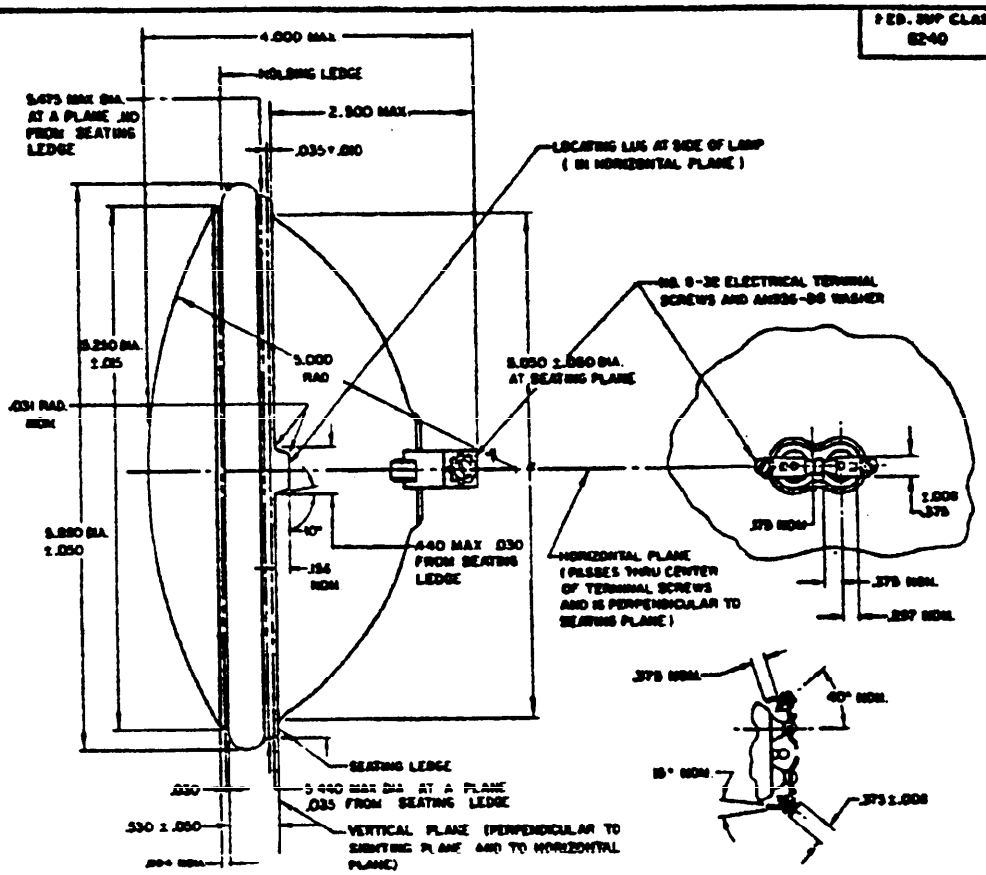

MS PART NO. (TRADE NO.)	MAX. WGT LBS	RATED VOLTS	INITIAL WATTS	FILAMENT TYPE	FILAMENT WITH OR WITHOUT SHIELD	MINIMUM BEAM INTENSITIES THROUGH OPTICAL AXIS CANDLEPOWER INITIAL	CANDLEPOWER AT 70% LIFE	HORIZONTAL ANGLE	VERTICAL ANGLE	RATED LIFE HOURS	LUMEN GLASS TYPE	LUMEN GLASS NOM RAD IN
MS24517-4351	1	28	250 ± 12.5	CC-6	WITHOUT SHIELD	65,000	45,500	6°	2°	25	CLEAR PRISMATIC	5.0
						12,000	8,400	40°	7°			

EACH LAMP SHALL BE PERMANENTLY AND LEGIBLY MARKED WITH THE IDENTIFICATION NUMBER, MANUFACTURER'S TRADE-MARK OR ABBREVIATION OF MANUFACTURER'S NAME, RATED VOLTS, AND WATTS.

NOTES:

1. LIFE TEST CYCLE: 5 MINUTES ON AND 5 MINUTES OFF.
2. MAXIMUM DEVIATION OF BEAM AXIS: 1°30' H, 1°30' V.
3. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
4. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

(B) ENTIRE STANDARD REVISED

REVISED (A) 6 SEPT 1967 (B) 29 MAY 1970

APPROVED 26 AUG 58

REVIEWER: AF-11

This standard has been approved by the Department of the Air Force and its mandatory for use by that activity. All other military activities are required to comply with standard when initiated.

P.A. USAF-82 Other Cust USAF-82	TITLE LAMP- INCANDESCENT, PAR-46 BULB, SCREW TERMINAL BASE, TAXIING	MILITARY STANDARD MS 24517 (USAF)
PROCUREMENT SPECIFICATION MIL-L-6363	SUPERSEDES	SHEET 1 OF 1

DD FORM 1 SEP 60 672-1 (Electronic version)

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:55Z
Check the source to verify that this is the current version before use.