
MS25189C is inactive for new design as of 18 October 2000.

FED. SUP CLASS
5940

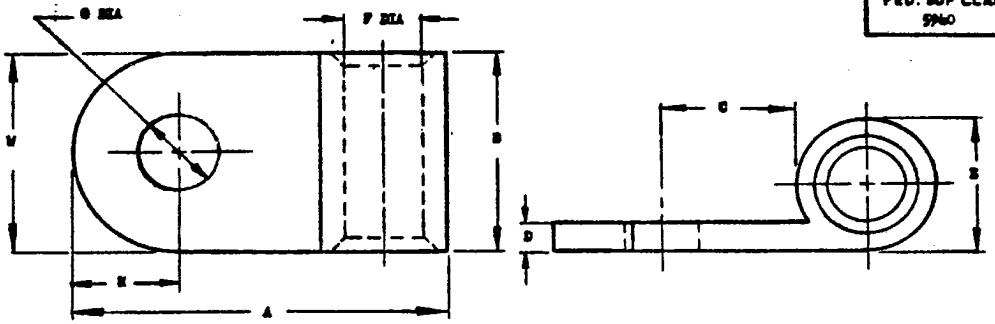

DASH NO.	CABLE SIZE	STUD SIZE	A MAX	B MIN	C MIN	D MIN	D MAX	E MIN	E MAX	F MIN	F MAX	G MIN	G MAX	H MAX	W MIN	W MAX
101	8	8	1.064	.367	.250	.059	.069	.300	.330	.176	.197	.168	.178	.258	.484	.516
102		10			.330							.193	.203	.266		
103		1/4			.398							.260	.285			
104		5/16	1.125									.320	.343	.308		
105		3/8	1.390		.453							.385	.410	.453	.734	.766
106		1/2										.510	.535			
107	6	10	1.118	.470	.290	.059	.069	.344	.377	.222	.244	.193	.203	.281	.484	.516
108		1/4			.330							.260	.285			
109		5/16	1.187		.398							.320	.343	.318		
110		3/8	1.432		.530							.385	.410	.453	.734	.766
111		1/2	1.453		.540							.510	.535			
112	4	10	1.290	.470	.330	.069	.084	.433	.471	.281	.303	.193	.203	.328	.531	.585
113		1/4										.260	.285			
114		5/16			.408							.320	.343	.344	.547	.600
115		3/8			.429							.385	.410			
116		1/2	1.562		.540							.510	.535	.453	.734	.766
117	2	10	1.389	.600	.300	.069	.084	.511	.545	.355	.377	.193	.203	.360	.609	.650
118		1/4										.260	.285			
119		5/16			.408							.320	.343			
120		3/8			.445							.385	.410			
121		7/16	1.562		.531							.443	.473	.453	.734	.766
122		1/2	1.593									.510	.535			
123	1	1/4	1.438	.665	.360	.080	.100	.566	.600	.390	.412	.260	.285	.333	.609	.650
124		5/16	1.463		.408							.320	.343			
125		3/8			.445							.385	.410			
126		7/16	1.639		.539							.443	.473	.460	.734	.766
127		1/2	1.776									.510	.535			
128	0	1/4	1.733	.665	.408	.090	.105	.698	.672	.440	.462	.260	.285	.443	.740	.765
129		5/16										.320	.343			
130		3/8			.445							.385	.410			
131		7/16			.539							.443	.473	.460		
132		1/2										.510	.535			
133	00	1/4	1.844	.780	.408	.113	.128	.746	.780	.502	.524	.260	.285	.471	.792	.835
134		5/16										.320	.343			
135		3/8			.445							.385	.410			
136		7/16										.443	.473			
137		1/2										.510	.535			
138	000	5/16	2.000	.805	.455	.113	.128	.800	.834	.557	.579	.320	.343	.536	.800	.825
139		3/8										.385	.410			
140		7/16			.539							.443	.473			
141		1/2										.510	.535			
142	0000	5/16	2.127	.984	.455	.116	.131	.866	.906	.622	.644	.320	.343	.568	.984	1.135
143		3/8										.385	.410			
144		7/16			.539							.443	.473			
145		1/2										.510	.535			
146		5/8			.670							.646	.666			
147		7/8	3.500		1.500							.890	.937			

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(C) ENTIRE STANDARD REVISED. (C) FOR CHANGES SEE SHEETS 1 AND 2.

P.A. Navy - AS
Other Coast
GSHP - 24

TITLE
TERMINAL, LUG, FLAG TYPE,
CRIMP STYLE, COPPER, CLASS I

MILITARY STANDARD
MS25189 (ASG)
SHEET 1 OF 2

PROCUREMENT SPECIFICATION
MIL-T-7928

SUPERSEDES:

APPROVED 24 Sep 56 REVISED (A) 1 Dec 58 (B) 21 Sep 62 (C) 1 Nov 68

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by those activities. All other military activities are required to employ this standard where suitable.

Review activities:

DD FORM 1426 672-1 (Limited coordination)
AMS use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 20260-23T15:05Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5940

NOTES:

B DIMENSION SHALL NOT EXCEED W DIMENSION.

H DIMENSION SHALL NOT BE LESS THAN ONE HALF W MINIMUM DIMENSION.

CHAMFER BOTH ENDS OF BARREL.

CONTOUR OPTIONAL WITHIN DIMENSIONS NOTED.

FINISH: TINNED PLATE.

DIMENSIONS IN INCHES.

THE SEAM OF THE BARREL SHALL BE PERMANENTLY SEALED AND SHALL NOT OPEN AS A RESULT OF THE CRIMPING OPERATION.

MATERIAL: COPPER QQ-C-576 OR QQ-C-502.

MIL-W-5086 WIRE SHALL BE USED FOR ALL QUALIFICATION TESTING WITH AN3427 CRIMPING TOOL.

MS25189-1 THRU -47 PART NUMBERS COVERED BY REVISION "B" DATED 21 SEPTEMBER 1962 ARE CANCELLED AFTER 28 FEBRUARY 1969.

INTERCHANGEABILITY RELATIONSHIP:

PART NUMBERS MS25189-101 THRU -147 CAN REPLACE MS25189-1 THRU -47 PARTS RESPECTIVELY.

THE CANCELLED MS25189-1 THRU -47 PARTS CANNOT ALWAYS REPLACE THE MS25189-101 THRU -147 PARTS. THE CANCELLED PARTS MAY BE USED UNTIL 28 FEBRUARY 1969 OR UNTIL A NEW QPL IS ESTABLISHED FOR MIL-T-7928F WHICHEVER COMES LATER.

APPROVED 24 Sep 56 REVISED (C) FOR CHANGES SEE SHEETS 1 AND 2.

Review activities:

his military standard is approved by the Department of the Air Force
nd the Naval Air Systems Command and is mandatory for use by these
ctivities. All other military activities are required to employ
his standard where suitable.

P.A. Navy - AS Other Cust USAF - 11	TITLE TERMINAL, LUG, FLAG TYPE CRIMP STYLE, COPPER, CLASS I	MILITARY STANDARD MS25189(ASG)
PROCUREMENT SPECIFICATION MIL - T - 7928	SUPERSEDES:	SHEET 2

Source: https://assist.dla.mil -- Downloaded: 2026-03-23T15:05Z
Check the source to verify that this is the current version before use.