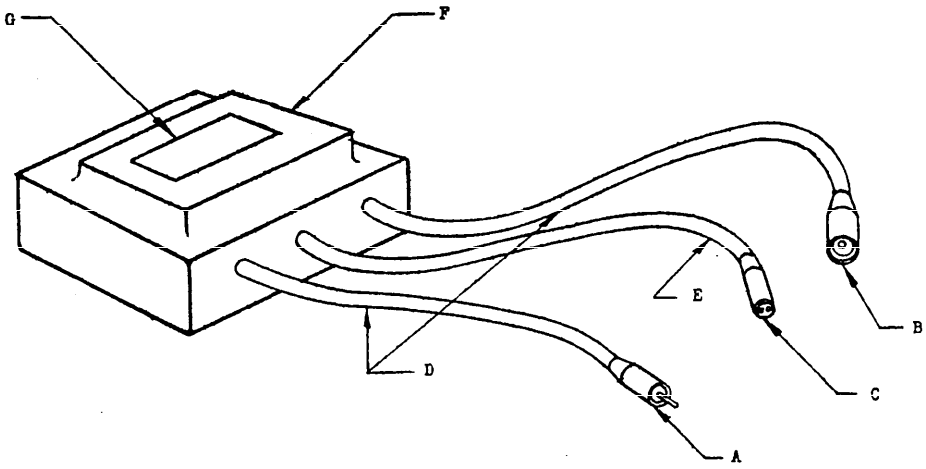


ELECTRICAL CHARACTERISTICS					
PRI AMP	PRI PWR FACTOR MIN %	EFFICIENCY MIN %	MAX SEC VOLTS RMS	SECONDARY AMPS (A)	LOAD (A)
20.	95	90		6.53-6.67	12.0 OHMS (a)
20				6.6 -7.1	SHORT CIRCUITED
20			230	0	OPEN CIRCUITED
15.8				5.1 -5.4	10.0 OHMS (a)
12.4				4.0 -4.3	8.3 OHMS (a)
10.3				3.3 -3.6	7.0 OHMS (a)
8.5				2.7 -3.0	6.0 OHMS (a)

(a) THE LOAD MAY BE EITHER A 500W, 6.6A LAMP OR THE OHMIC RESISTANCE SPECIFIED.

A PLUG FIGURE 6a FAA SPECIFICATION L-823.
B RECEPTACLE FIGURE 6b FAA SPECIFICATION L-823.
C RECEPTACLE FIGURE 1c FAA SPECIFICATION L-823.
D PRIMARY CABLE.
E SECONDARY CABLE.
F CASE.
G IDENTIFICATION MARKING (LOCATION OPTIONAL).

PART NO.	LEAD LENGTH INCHES	
	D	E
MS27133-1	30 ±3	54 ±3

IN COMPUTING EFFICIENCY, CORRECTION SHALL BE MADE FOR LEAD LOSSES.

MAXIMUM WEIGHT 25 POUNDS.

DIMENSIONS IN INCHES.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 25 May 64 REVISED (A) 18 Aug 65

Review activities: - 85, 11
Navy - MP
approved by the MSC (Department of the Air Force) and the ...y, and is mandatory for use by ...ment of the Air Force military activities are required to employ this standard where suitable.

P.A. USAF - 11	TITLE	MILITARY STANDARD
Other Cust Navy - MP	TRANSFORMER, POWER, ISOLATION; AIRPORT LIGHTING, 500W/20A/6.6A/5000V	MS27133 (ASG)
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET OF

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:16Z
Check the source to verify that this is the current version before use.