INCH - POUND

MS27334D
20 May 2005
SUPERSEDING
MS27334C
20 December 1967


DETAIL SPECIFICATION SHEET

# CONNECTORS, RECEPTACLE, ELECTRICAL, WALL MOUNTING FLANGE, SOLDER TYPE, BAYONET COUPLING, CLASSES P & T, SERIES II

This specification is approved for use by all Departments and Agencies of the Department of Defense.

Inactive for new design after 7 December 1998.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-27599.

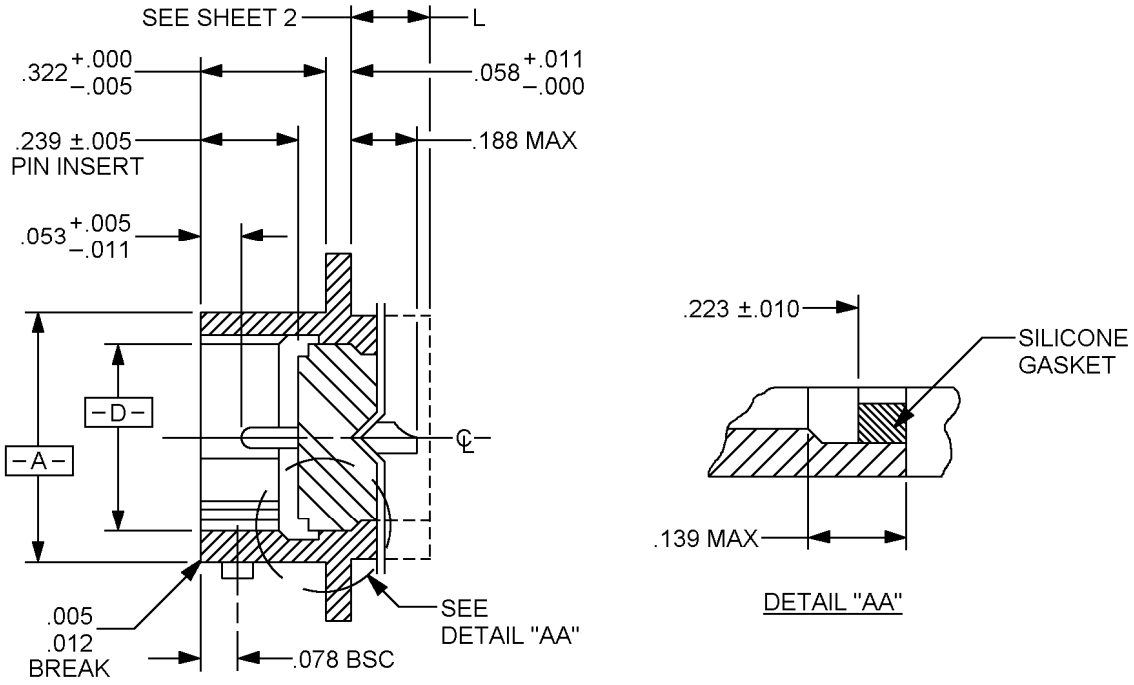



CLASS T AND P

FIGURE 1. Receptacle, wall mount flange.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:21Z
Check the source to verify that this is the current version before use.

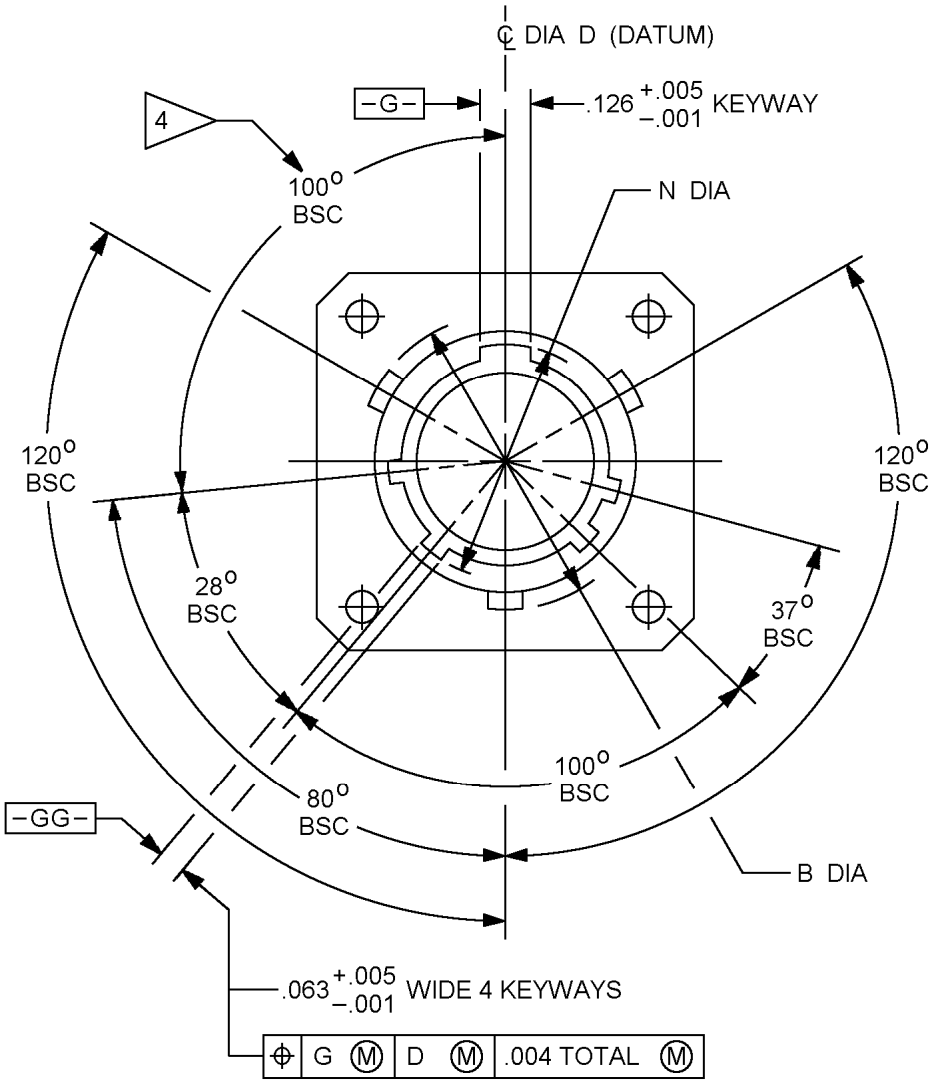



CLASS T AND P

FIGURE 1. Receptacle, wall mount flange - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:21Z
Check the source to verify that this is the current version before use.

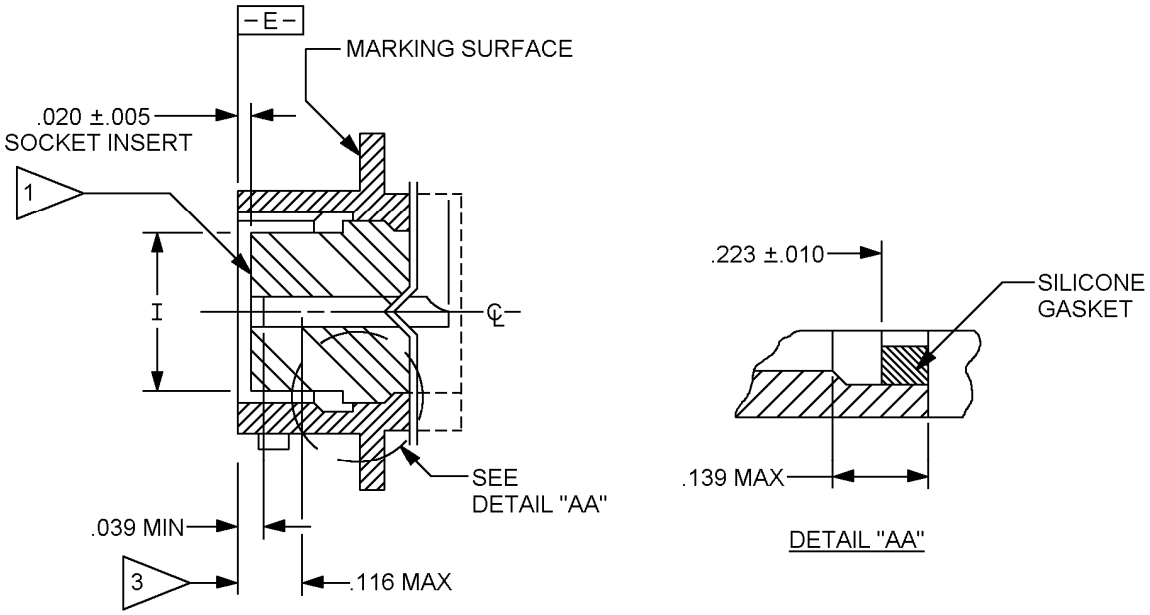


CLASS T AND P

FIGURE 1. Receptacle, wall mount flange - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:21Z
Check the source to verify that this is the current version before use.

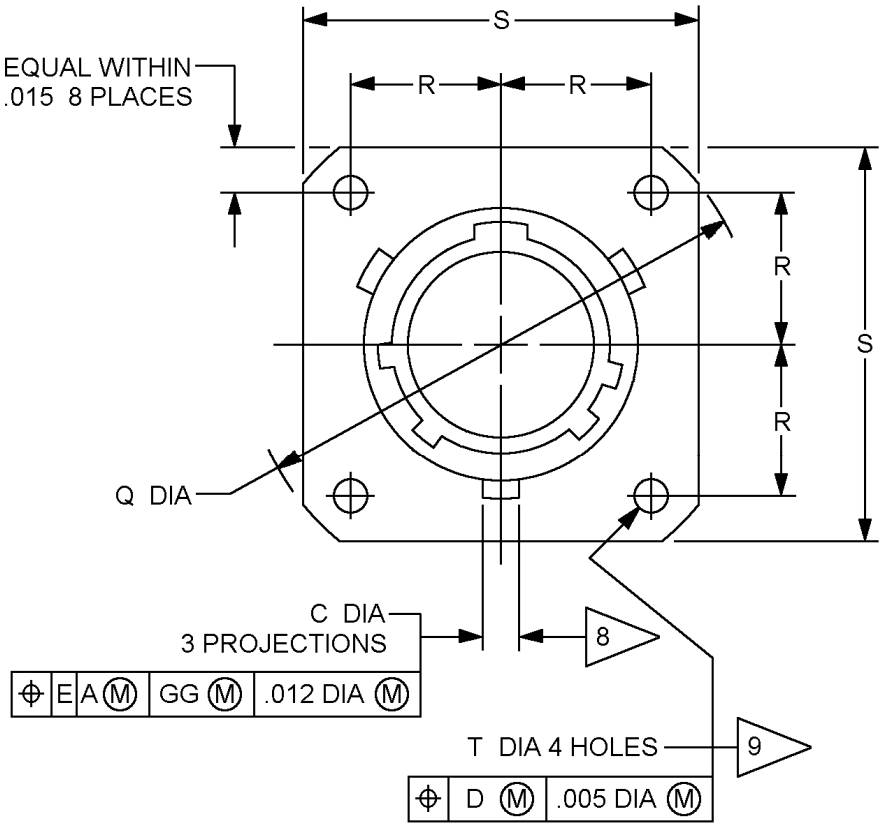



FIGURE 1. Receptacle, wall mount flange - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:21Z
Check the source to verify that this is the current version before use.

| Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|
| 0.001 | 0.0254 | 0.012 | 0.305 | 0.058 | 1.473 | 0.139 | 3.531 |
| 0.004 | 0.1016 | 0.015 | 0.381 | 0.063 | 1.600 | 0.188 | 4.775 |
| 0.005 | 0.127 | 0.02 | 0.508 | 0.078 | 1.981 | 0.223 | 5.664 |
| 0.010 | 0.254 | 0.039 | 0.991 | 0.116 | 2.947 | 0.239 | 6.071 |
| 0.011 | 0.279 | 0.053 | 1.346 | 0.126 | 3.200 | 0.322 | 8.179 |

NOTES:

1. Insert front surface shall be flat within .005 T.I.R.
2. Dimensions are in inches. Metric equivalents are in parenthesis and given for information only.
3. The point at which a gauge pin having the same basic diameter as the mating contact and a square face, touches socket contact spring.
4. Normal keyway position. For other keyway positions, see MIL-DTL-27599.
5. Diameters A and D shall be concentric within .015 T.I.R.
6. Diameter A with respect to diameter B, and diameter D with respect to diameter N, shall be concentric at MMC.
7. Diameters D and I shall be concentric within .005 T.I.R. at MMC.
8. The gauge features for GG shall be CC smaller than their MMC size at basic location.
9. The gauge features for GG shall be .010 smaller than their MMC size at basic location.

FIGURE 1. Receptacle, wall mount flange - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:21Z
Check the source to verify that this is the current version before use.

TABLE 1. Dimensions.

| Shell size | A dia + .001 - .005 | B dia + .000 - .016 over projections | C dia + .006 - .002 | D dia + .005 - .001 | l dia ± .005 | N dia + .005 - .006 |
|---|---|---|---|---|---|---|
| 8 | .473 (12.01) | .563 (14.30) | .078 (1.98) | .362 (9.19) | .296 (7.52) | .412 (10.46) |
| 10 | .590 (14.98) | .680 (17.27) | | .490 (12.44) | .413 (10.49) | .540 (13.71) |
| 12 | .750 (19.05) | .859 (21.82) | | .607 (15.42) | .527 (13.38) | .689 (17.50) |
| 14 | .875 (22.22) | .984 (25.00) | | .732 (18.59) | .652 (16.56) | .814 (20.67) |
| 16 | 1.000 (25.40) | 1.108 (28.14) | | .857 (21.77) | .777 (19.73) | .939 (23.85) |
| 18 | 1.125 (28.57) | 1.233 (31.32) | | .962 (24.43) | .866 (22.00) | 1.039 (26.39) |
| 20 | 1.250 (31.75) | 1.358 (34.49) | .125 (3.175) | 1.087 (27.60) | .991 (25.17) | 1.164 (29.56) |
| 22 | 1.375 (34.92) | 1.483 (37.67) | | 1.212 (30.78) | 1.116 (28.34) | 1.289 (32.74) |
| 24 | 1.500 (38.10) | 1.610 (40.89) | | 1.337 33.96) | 1.241 (31.52) | 1.414 (35.91) |




Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:21Z
Check the source to verify that this is the current version before use.

TABLE 1. Dimensions.


| Shell size | Q max | R BSC | S max | T + .010 - .005 | CC |
|---|---|---|---|---|---|
| 8 | 1.078 (27.38) | .297 (7.54) | .828 (21.03) | | .004 (.102) |
| 10 | 1.266 (32.15) | .3595 (9.1313) | .954 (24.23) | | |
| 12 | 1.391 (35.33) | .406 10.31) | 1.047 (26.59) | | |
| 14 | 1.516 (38.50) | .453 (11.50) | 1.141 (28.98) | .120 | .010 |
| 16 | 1.641 (41.68) | .4845 (12.30) | 1.234 (31.34) | (3.05) | |
| 18 | 1.766 (44.85) | .531 (13.48) | 1.328 (33.73) | | (.254) |
| 20 | 1.891 (48.03) | .578 (14.68) | 1.453 (36.90) | | |
| 22 | 2.016 (51.20) | .625 (15.87) | 1.578 (40.08) | | |
| 24 | 2.204 (55.98) | .6875 (17.46) | 1.703 (43.25) | .147 (3.73) | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:21Z
Check the source to verify that this is the current version before use.

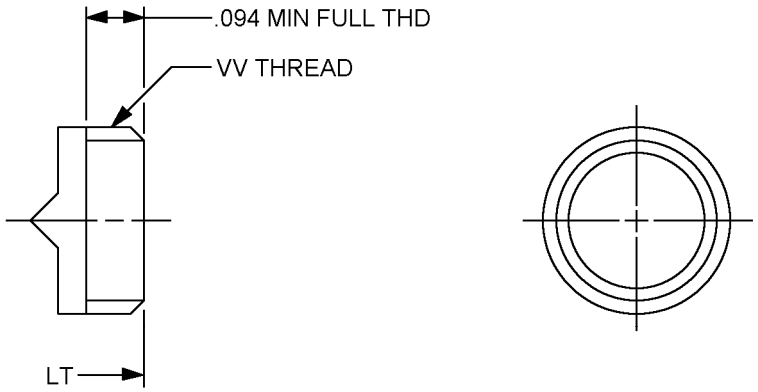


CLASS T

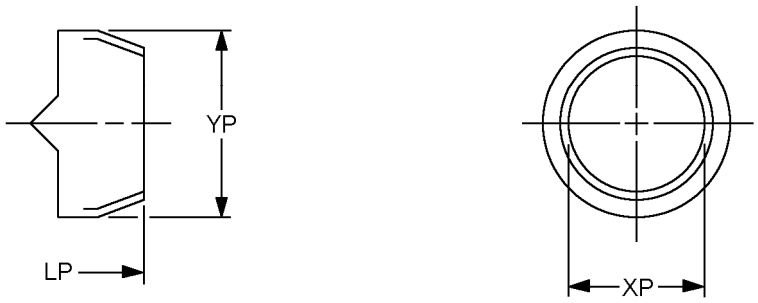


CLASS P

FIGURE 2. Receptacle, rear accessory areas.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:21Z
Check the source to verify that this is the current version before use.

TABLE 2. Dimensions.

| Shell size | LT max | VV thread UNEF-2A MOD (plated) | | LP max | XP min dia | YP max dia |
|---|---|---|---|---|---|---|
| | | Size | Major dia MOD | | | |
| 8 | .250 (6.35) | .4375 - 28 | .421 - .417 (10.69 – 10.60) | .453 (11.50) | .317 (8.05) | .531 (13.48) |
| 10 | | .5625 - 24 | .542 - .538 (13.76 – 13.66) | | .434 (11.02) | .641 (16.28) |
| 12 | | .6875 - 24 | .667 - .663 (16.94 – 16.84) | | .548 (13.92) | .766 (19.45) |
| 14 | | .8125 - 20 | .791 - .787 (20.09 – 19.98) | | .673 (17.09) | .891 (22.63) |
| 16 | | .9375 - 20 | .916 - .912 (23.26 – 23.16) | | .798 (20.27) | 1.016 (25.80) |
| 18 | | 1.0625 - 18 | 1.034 - 1.030 (26.26 – 26.16) | | .899 (22.83) | 1.125 (28.57) |
| 20 | | 1.1875 - 18 | 1.158 - 1.154 (29.41 – 29.31) | | 1.024 (26.01) | 1.250 (31.75) |
| 22 | | 1.3125 - 18 | 1.283 - 1.279 (32.58 – 32.48) | | 1.149 (29.18) | 1.375 (34.92) |
| 24 | .328 (8.33) | 1.4375 - 18 | 1.408 - 1.404 (35.76 – 35.66) | .531 (13.48) | 1.274 (32.36) | 1.500 (38.10) |

REQUIREMENTS

Dimensions and configurations: See figures 1 and 2 and tables 1 and 2.


This connector mates with MS27336.

Insert arrangement shall be in accordance with MIL-STD-1560.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:21Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN) example:

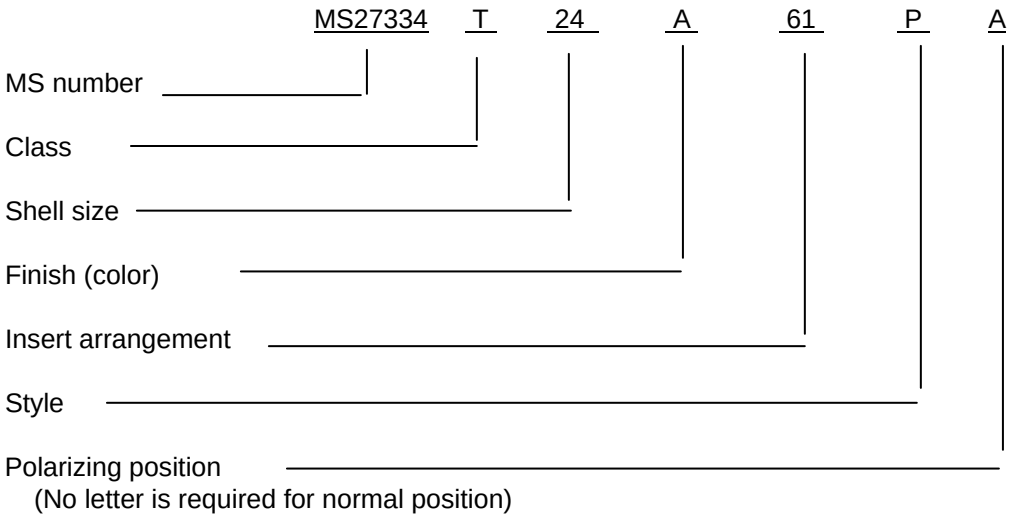


Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Reference documents. In addition to MIL-DTL-27599, this document references the following:

MIL-STD-1560
MS27336

CONCLUDING MATERIAL

Custodians:
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

Review activities:
Air Force - 99
DLA - IS

(Project 5935-4650-000)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:21Z
Check the source to verify that this is the current version before use.