
FED. SUP. CLASS
4720

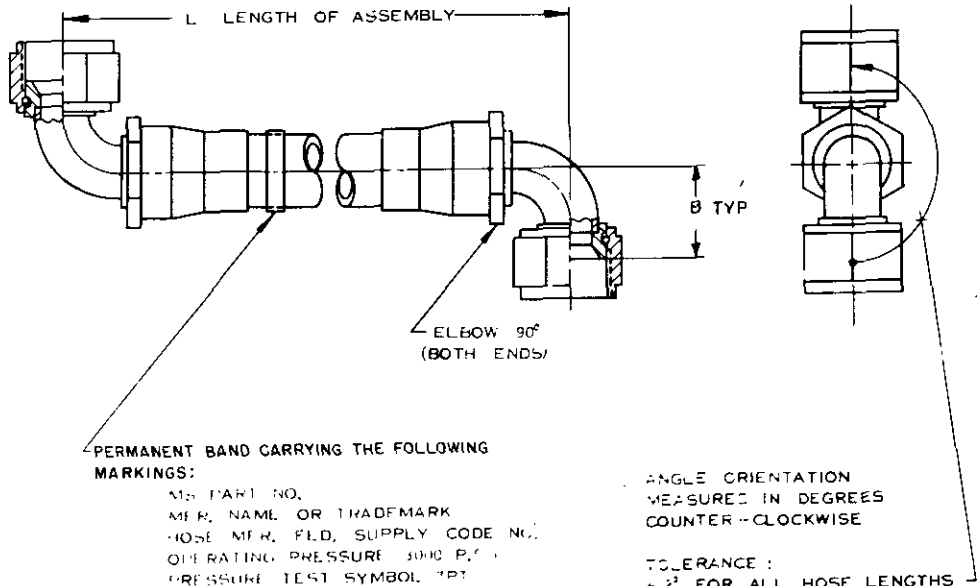

PERMANENT BAND CARRYING THE FOLLOWING MARKINGS:
- MS PART NO.
- MFR. NAME OR TRADEMARK
- HOSE MFR. FED. SUPPLY CODE NO.
- OPERATING PRESSURE 3000 P.S.I.
- PRESSURE TEST SYMBOL "P"
- DATE OF HOSE ASS'Y. MFR. EXPRESSED IN TERMS OF MONTH AND YEAR

ANGLE ORIENTATION MEASURED IN DEGREES COUNTER-CLOCKWISE

TOLERANCE: ± 2° FOR ALL HOSE LENGTHS

DASH NO.	CODE LETTER	TUBING O.D. REF	HOSE I.D. REF	"B" REACH MIN	"B" REACH MAX
-4	E	1/4	7/32	.500	.805
-6	G	3/8	5/16	.673	1.006
-8	H	1/2	7/16	.797	1.300
-10	J	5/8	9/16	1.140	1.670
-12	K	3/4	11/16	1.340	1.940
-16	M	1	7/8	1.544	2.217
-20	N	1-1/4	1-1/8	2.172	2.297

SWIVEL NUTS MUST HAVE HEX DIMENSIONS IN ACCORDANCE WITH AN816 AND MUST BE INCAPABLE OF BEING REMOVED FROM THE FITTING ASSEMBLY.

FITTING END TO MATE WITH MS33656.

HOSE ASSEMBLIES TO BE SPECIFIED AS:
12 INCHES LONG AND UNDER--INCREMENTS NOT LESS THAN 1/8 INCH (TOLERANCE ± 1/8 INCH)
12 INCHES TO 18 INCHES LONG--INCREMENTS NOT LESS THAN 1/4 INCH (TOLERANCE ± 1/8 INCH)
18 INCHES TO 36 INCHES LONG--INCREMENTS NOT LESS THAN 1/2 INCH (TOLERANCE ± 1/4 INCH)
OVER 36 INCHES LONG--INCREMENTS NOT LESS THAN 1 INCH (TOLERANCE ± 1% OF LENGTH)

THE PART NO. SHALL BE FORMULATED TO REFLECT THE BASE NUMBER, SIZE, LENGTH AND ANGLE.

(F) CANCELLED - FOR PROCUREMENT USE AS158 AND AS632

APPROVED 2 Apr 65 (A) REVISED 7 Dec 66 (B) 21 Nov 67 (C) 21 May 68 (D) 18 Aug 72 (E) 15 DEC 76 (F) 20 JUNE 1986

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for competitive use shall be made from this document.

User activities:

Review activities:

P.A. USAF - 11 OTHER CUST. Army - ME Navy - AS	TITLE HOSE ASSEMBLY, TETRAFLOROETHYLENE, HYDRAULIC AND PNEUMATIC, (3000 P.S.I.) ELBOW 90° TO ELBOW 90° FLARED	MILITARY STANDARD MS27368
PROCUREMENT SPECIFICATION MIL-H-38360	SUPERSEDES:	SHEET 1 OF 2

4720-0737

*U.S. GOVERNMENT PRINTING OFFICE: 1986--605-036/43963

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:22Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4720

EXAMPLE OF PART NUMBER

MS 27368 J * 16 4 030

- 030 — ANGLE BETWEEN ELBOWS IN DEGREES
- 4 — LENGTH IN EIGHTS OF AN INCH
- 16 — LENGTH IN INCHES
- * — CODE LETTER SEE BELOW
- J — SIZE DESIGNATION FOR -10

* ADD CODE LETTER BELOW FOR ADDITIONAL FEATURES (IF REQUIRED)

"A" AS 1072-XX-SIL SLEEVE, FIRE PROTECTION (SILICONE) (-65°F (-54°C) THRU +500°F (+260°C)) SECURE WITH CRES BANDS AS REQUIRED

"B" AS 1073-XX-A/B SLEEVE, HEAT SHRINKABLE (-65°F (-54°C) THRU +250°F (121°C)XA DESIGNATES TRANSPARENT COVER FOR I.D. BANDS, ETC., MATERIAL IRRADIATED POLYOLEFIN, NOT FLAME RESISTANT) (B DESIGNATES OPAQUE BLACK COVER FOR ABRASION PROTECTION, SELF-EXTINGUISHING IN FLAME)

"C" AS 1291-XX-A/B SLEEVE, CHAFEGUARD, TFE (-65°F (-54°C) THRU +500°F (+232°C))(A DESIGNATES WHITE EXTRUDED AND SEAMLESS) (B DESIGNATES BLACK EXTRUDED AND SEAMLESS) WITH CRES BANDS, AS REQUIRED

"D" AS 1291-XX-C SLEEVE, CHAFE GUARD, FEP (-65°F (-54°C) THRU +350°F(+177°C))(C DESIGNATES TRANSPARENT FEP) SECURE WITH CRES BANDS AS REQUIRED

"E" AS 1291-XX SLEEVE, HEAVY WALL, CHAFE GUARD, TFE (-65°F (-54°C) THRU +450°F (+232°C)) SECURE WITH CRES BANDS

"L" LOCKWIRE HOLE

"F" CODE A + L

"G" CODE B + L

"H" CODE C + L

"J" CODE D + L

"K" CODE E + L

THE CUT ENDS OF THE FIRE PROTECTION SLEEVE (CODE A) SHALL BE COATED WITH RTV SILICONE RUBBER, PRIOR TO INSTALLATION TO PREVENT WICKING OF FLUIDS. AFTER INSTALLATION, CRACKS OR VOIDS IN THE FIRE PROTECTION SLEEVE, WHICH EXPOSE THE ASBESTOS, SHALL BE COATED WITH RTV RUBBER.

DIMENSIONS IN INCHES

FOR DESIGN PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

APPROVED 2Apr65 REVISED (A) 7Dec66 (B) 21Nov67 (C) 21May68 (D) 18Aug72 (E) 15Dec76 (F) 20 Jun 86

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
AIR FORCE - 11 Other Cust ARMY - ME NAVY - AS		HOSE ASSEMBLY, TETRAFLUOROETHYLENE, HYDRAULIC AND PNEUMATIC, (3000 P.S.I.) ELBOW 90° TO ELBOW 90° FLARED	MS 27368
PROCUREMENT SPECIFICATION MIL-H-38360	SUPERSEDES:		SHEET 2 OF

DD FORM (MAY 73) 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:22Z
Check the source to verify that this is the current version before use.