
FED SUP CLASS
5935

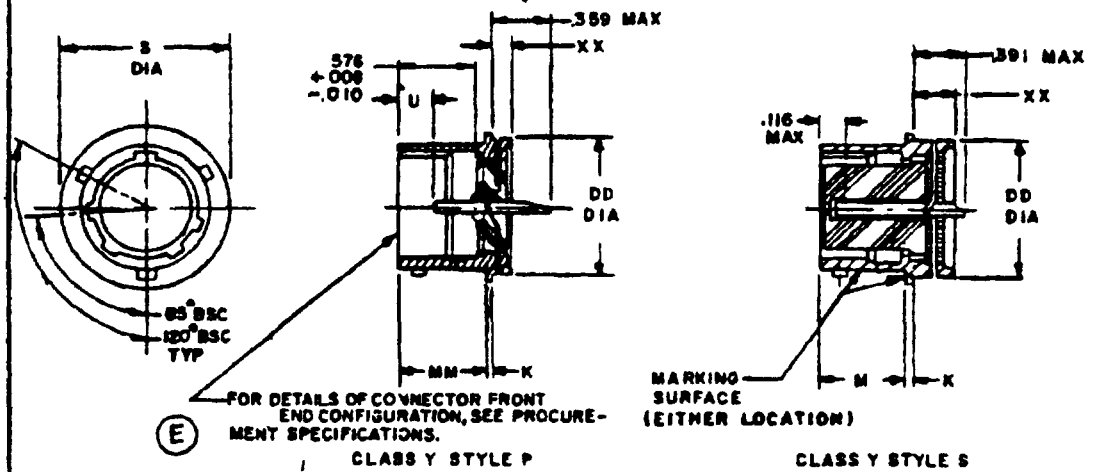


(E) FOR DETAILS OF CONNECTOR FRONT END CONFIGURATION, SEE PROCUREMENT SPECIFICATIONS.

CLASS Y STYLE P

CLASS Y STYLE S

EXAMPLE OF PART NUMBER

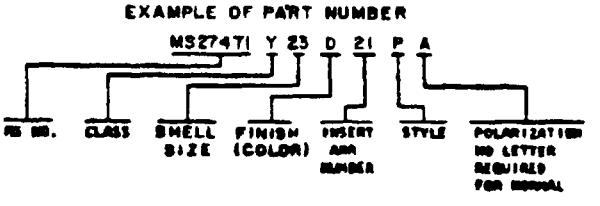

(E) FOR CHANGES SEE SHEETS 1 & 2

APPROVED 8 SEP 1966 REVISED (D) 13 AUG 74 (E) 2 JAN 1976

PA AF-85 Other Cust ARMY-EL NAVY-AS	International Interest	TITLE CONNECTOR, RECEPTACLE, ELECTRICAL, SOLDER MOUNTING, SOLDER TYPE, HERMETIC SEAL, SERIES I	MILITARY STANDARD MS27471
Procurement Specification MIL-C-38999		SUPERSEDES MS27471 (USAF)	SHEET 1 OF 2

DD FORM 1 SEP 63 672

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-2005-12

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

User activities: Army - Navy - Air Force -

Reviewer activities: Army - ML MU
Navy - EC, MC, OS
Air Force - 11, 15, 17, 80
DSA - ES

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:40Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5935

SHELL SIZE	K +.016 -.005	M +.031 -.000	MM +.031 -.000	DD DIA +.001 -.005	S DIA ±.016 O.D	U +.005 -.011	XX MAX
9				.672	.750		
11				.781	.844		
13				.906	.969		
15	.031	.747	.659	1.031	1.094	.390	.187
17				1.156	1.218		
19				1.250	1.312		
21				1.375	1.438		
23				1.500	1.563		.218
25				1.625	1.688		.218

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.116	2.95	.672	17.07	1.150	29.30
.004	.10	.126	3.18	.747	18.97	1.218	30.94
.005	.13	.187	4.75	.750	19.05	1.250	31.75
.008	.20	.218	5.54	781	19.84	1.312	33.32
.010	.25	.359	9.12	844	21 44	1.375	34.93
.011	.29	.390	9.91	.906	23.01	1.438	36.53
.016	.41	.391	9.93	969	24.61	1.500	38.10
.031	.79	.576	14.63	1.031	26.19	1.563	39.70
.063	1.60	.659	16.74	1.094	27.79	1.625	41.28
						1.688	42.88

NOTES.
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
(E) 3. For main keyway and keyway positions, see MIL-C-38999.
4. Diameters DD and S shall be concentric within .015 T.I.R.
5. For design feature purposes, this standard takes precedence over documents referenced herein.
6. Referenced documents shall be of the issue in effect on date of invitation for bid.

APPROVED 8 SEP 1966 REVISED (D) 13 AUG 74 (E) FOR CHANGES SEE SHEETS 1 & 2

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

User activities: Army - Navy - Air Force
Army - MI, MU
Navy - EC, NIC, OS
Air Force - 11, 15, 17, 80
DSA - ES
Reviewer activities

PA AF-85 Other Cust ARMY-EL NAVY-AS	International interest	TITLE CONNECTOR, RECEPTACLE, ELECTRICAL, SOLDER MOUNTING, SOLDER TYPE, HERMETIC SEAL, SERIES I	MILITARY STANDARD MS27471
Procurement Specification MIL-C-38999		SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 69 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:40Z
Check the source to verify that this is the current version before use.