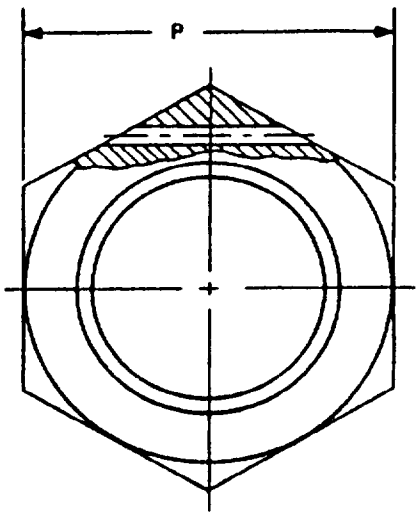
REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS ... FICATION
...ET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS. ...CIFIED IN
THE SOLICITATION MIL-C-38999.

Form Approved
OMB No 0704-0188




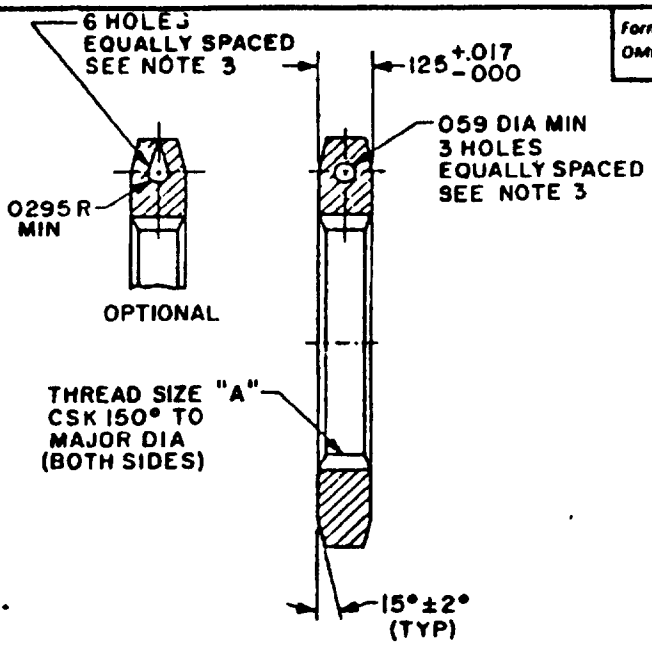


TABLE I. Dimensions.

Shell size	A Thread size class 2B	P +.017 -.016 hex
-8	.8750-20 UNEF	1.062
-10	1.0000-20 UNEF	1.188
-12	1.1250-18 UNEF	1.312
-14	1.2500-18 UNEF	1.438
-16	1.3750-18 UNEF	1.562
-18	1.5000-18 UNEF	1.688
-20	1.6250-18 UNEF	1.812
-22	1.7500-18 UNS	2.000
-24	1.8750-16 UN	2.125

EXAMPLE OF PART NUMBER

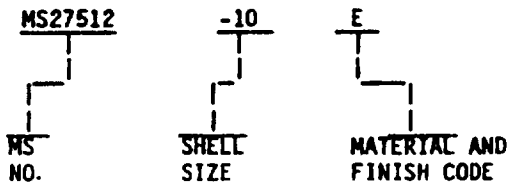

Ⓕ INACTIVE FOR NEW DESIGN - USE MS 3186

Ⓕ denotes changes

PREPARING ACTIVITY Air Force - 85
CUSTODIANS ARMY CR NAVY - AS
AIR FORCE - 85 DLA -
REVIEW Navy-EC,MC,OS; DLA-ES
Air Force-11,15,17,99
USER Army - AR, MI
PROJECT NUMBER 5935-3756

TITLE MILITARY SPECIFICATION SHEET
NUT, HEXAGON, CONNECTOR MOUNTING, SERIES II

SPECIFICATION SHEET NUMBER
MS27512F 26 July 1990
SUPERSEDING
MS27512E. 20 February 1978
AMSC N/A FSC 5935

DISTRIBUTION STATEMENT
A: Approved for public release; distribution is unlimited.

THIS SPECIFICATION ...PROVED FOR USE BY all Departments
and Age...S of the Department of Defense.

Source: https://assist.dla.mil -- Downloaded: 2020-10-25 16:43Z
Check the source to verify that this is the current version before use.

SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-C-38999.

and Agencies of the Department of Defense.

Form Approved
OMB No 0704 0188

Inches	mm	Inches	mm
.016	0.41	1.312	33.32
.017	0.43	1.438	36.53
.0295	.750	1.562	39.67
.059	1.50	1.688	42.88
.125	3.18	2.000	50.80
1.062	26.97	2.125	53.98
1.188	30.18		

TABLE II. Material and finish codes.

Code	Material	Finish 1/	Applicable connectors
A	Aluminum: QQ-A-200/8, condition T-6; QQ-A-225/5, condition T-4 or QQ-A-225/8, condition T-6	A	Series II, finishes A and D
B		B	Series II, finish B
C		C	Series II, finish C
F		F	Series II, finish F
E	Corrosion resisting steel: QQ-S-764, type 303 or 303 SE	E	Series II, finish E

1/ In accordance with MIL-C-38999.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Safety wire holes shall not pull out when safety wire NI-CU alloy (MONEL) or NI-CR alloy (INCONEL) .020 (0.51 mm) diameter in accordance with MS20995 is threaded through a hole and a pull of 30 pounds minimum is applied. Two pulls shall be made, one parallel with axis of nut and one perpendicular to axis of nut.
4. Threads to be in accordance with MIL-S-7742.
5. Remove all burrs and sharp edges.
6. For design feature purposes, this standard takes precedence over acquisition documents referenced herein.
7. Referenced documents shall be of the issue in effect on date of invitation for bid.

PREPARING ACTIVITY: Air Force - 85
CUSTODIANS: ARMY CR; NAVY - AS; AIR FORCE - 85; DLA -
REVIEW: Navy-EC,MC,OS; DLA - ES
USER: Air Force-11,15,17,99; Army-AR,MI
PROJECT NUMBER: 5935-3756

MILITARY SPECIFICATION SHEET
TITLE: NUT, HEXAGON, CONNECTOR MOUNTING, SERIES II

SPECIFICATION SHEET NUMBER: MS27512F
SUPERSEDING: MS27512E 20 February 1978
AMSC N/A FSC 5935

DISTRIBUTION STATEMENT: A Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:43Z
Check the source to verify that this is the current version before use.

DD Form 672 MAY 88 Previous editions are obsolete