INCH-POUND

MS27558C(USAF)
31 January 1994
SUPERSEDING
MS27558B(USAF)
14 November 1977

MILITARY SPECIFICATION SHEET

SUPPORT, CABLE RIGHT ANGLE, CLOSED

This specification is approved for use by the department of the Air Force and is available all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-26500.

Inactive For Airforce New Design Equipment or Modification of Existing Equipment after 14 November 1977. No Superseding Standard

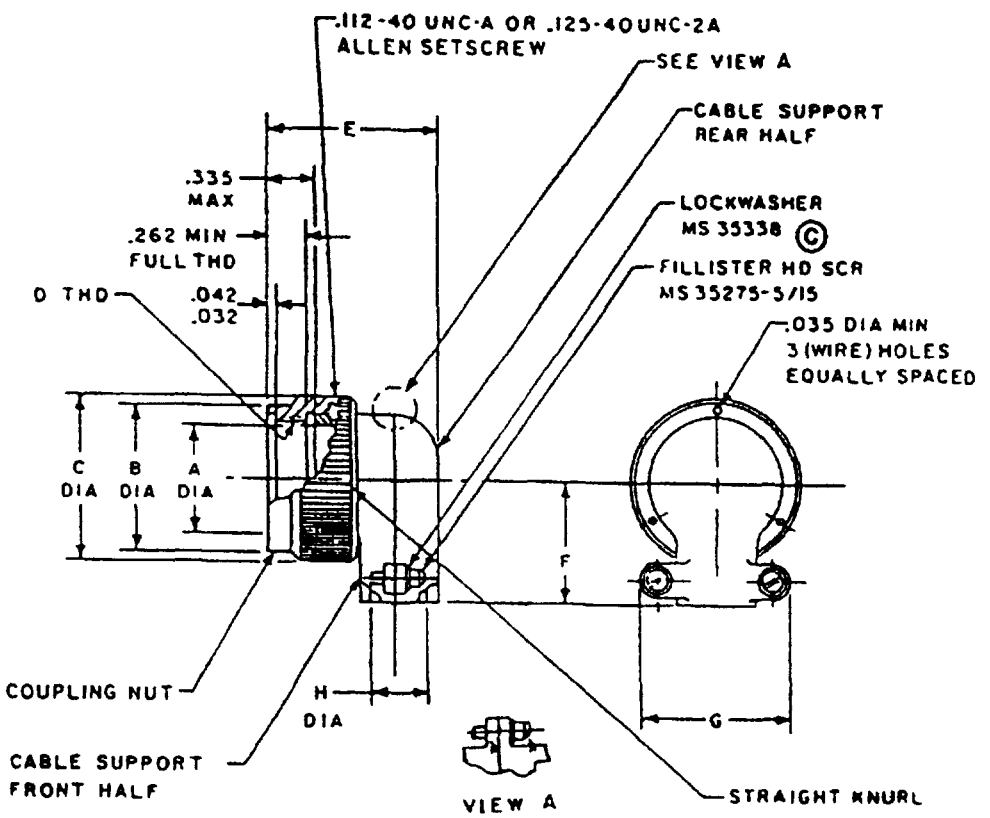


FIGURE 1 Dimensions and configuration

C denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:43Z
Check the source to verify that this is the current version before use.

MS PART NUMBER	SIZE	A DIA	B DIA MAX	C DIA MAX	D THREAD UNEF-2B	E MAX	F MAX	G MAX	H DIA	MAXIMUM WEIGHT IN POUNDS
MS27558-1	8	.348	.532	.672	.4375-28	1.200	.602	.892	.240	
MS27558-2	10	.440	.657	.797	.5625-24	1.320	.650	1.072	.365	
MS27558-3	12	.600	.845	1.016	.750-20	1.320	.740	1.072	.365	
MS27558-4	14	.684	.907	1.110	.8125-20	1.487	.775	1.108	.515	
MS27558-5	16	.789	1.032	1.234	.9375-20	1.470	.830	1.108	.515	
MS27558-6	18	.922	1.157	1.360	1.0625-18	1.588	.897	1.233	.640	
MS27558-7	20	1.053	1.282	1.485	1.1875-18	1.759	.955	1.477	.775	
MS27558-8	22	1.172	1.407	1.610	1.3125-18	1.759	1.015	1.477	.775	
MS27558-9	24	1.302	1.532	1.735	1.4375-18	2.027	1.077	1.727	1.060	

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
010	.25	.532	13.51	830	21.08	1.072	27.23	1.360	34 54
032	81	.600	15.24	845	21 46	1 077	27.36	1 407	35 74
035	89	602	15.29	892	22.66	1.108	28.14	1 470	37 34
042	1 07	.640	16.26	897	22.78	1.110	28.19	1.477	37.52
240	6 10	.650	16.51	907	23.04	1 157	29.39	1 485	37 72
262	6 65	657	16 69	922	23.42	1.172	29.77	1.532	38 91
335	8.51	672	17.07	955	24.26	1.200	30 48	1.588	40 34
348	8 84	.684	17.37	1.015	25.78	1.233	31.32	1.610	40 89
365	9.27	.740	18.80	1 016	25.81	1.234	31.34	1.727	43.87
440	11 18	.775	19.68	1.032	26.21	1.282	32.56	1.735	44.07
487	12 37	789	20.04	1.053	26.75	1.302	33 07	1 750	44.45
515	13 08	797	20.24	1 060	26.92	1 320	33.53	2.027	51 49

NOTES

1. Dimensions are in inches.
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerances are ± 010.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:43Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction

Dimensions and configuration See figure 1

Coupling nut securely captivated to cable support and has provisions for locking in an indexed position

Material and finish

Aluminum components Anodize in accordance with MIL-A-8625 or suitable hard anodizing process to meet the performance requirements of MIL-C-26500

Cable support material Aluminum alloy in accordance with QQ-A-591 composition 13, A13, A380, or 380

Coupling nut material Aluminum alloy in accordance with QQ-A-225 or QQ-A-367

Threads In accordance with MIL-S-7742.

CONCLUDING MATERIAL

Custodian
Air Force - 85

Review activities
Air Force - 17, 99
DLA - ES

Preparing activity
Air Force - 85

Agent
DLA - ES

(Project 5935-F513)

Source: https://assist.dla.mil -- Downloaded: 202610-23T16:43Z
Check the source to verify that this is the current version before use.