
FED SUP CLASS
5340

FAST PIN

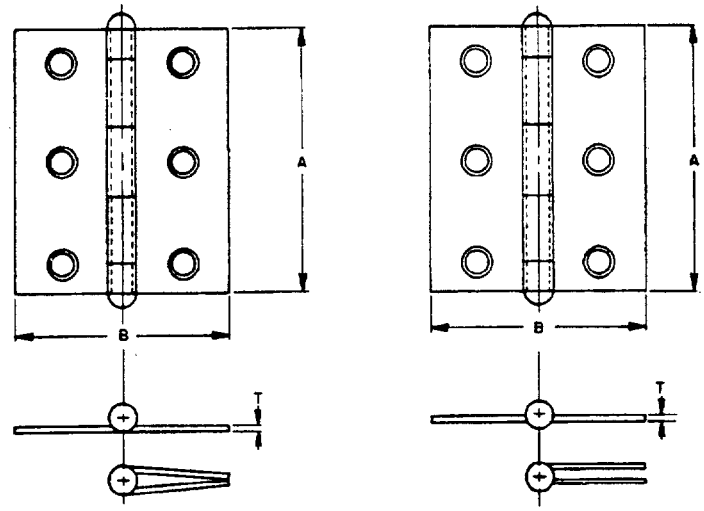


NOT SWAGED, FOR FULL SERVICE APPLICATION

SWAGED, FOR MORTISE APPLICATION

TABLE I. DASH NUMBERS AND DIMENSIONS.

| NOMINAL SIZE | | | | | | | |
|---|---|---|---|---|---|---|---|
| | A LENGTH | ±.06 | 1.25 | 1.50 | 2.00 | 2.50 | 3.00 |
| | B WIDTH | ±.06 | 1.37 | 1.50 | 1.75 | 1.87 | 2.19 |
| T THICKNESS | | ±.005 | .065 | .068 | .074 | .079 | .079 |
| NUMBER OF SCREW HOLES | | | 4 | 4 | 4 | 6 | 6 |
| 1/ SIZE OF SCREWS | | (REF) | #6 X 3/4 | #6 X 3/4 | #7 X 3/4 | #7 X 3/4 | #8 X 3/4 |
| TYPES | | | DASH NUMBER | DASH NUMBER | DASH NUMBER | DASH NUMBER | DASH NUMBER |
| FAST PIN, NOT SWAGED | | | 2 | 4 | 6 | 8 | 10 |
| FAST PIN, SWAGED | | | 22 | 24 | 26 | 28 | 30 |

1/ SEE NOTE 1

Ⓑ ENTIRE STANDARD REVISED

APPROVED 24 FEB 61 REVISED Ⓑ 21 DEC 87

USER ACTIVITIES:
ARMY – AV, ME
NAVY – MC

REVIEWER ACTIVITIES:
ARMY – EA, GL
NAVY – SH
AIR FORCE – 82
DLA – IS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A

| P.A. | INTERNATIONAL INTEREST | TITLE | MILITARY STANDARD |
|---|---|---|---|
| ARMY – AR<br>Other Cust<br>NAVY – YD<br>AIR FORCE-99 | | HINGE, BUTT-NARROW, NON-TEMPLATE | MS27966 |
| PROCUREMENT SPECIFICATION<br>ANSI A156.1 | SUPERSEDES<br>SHEXI, MQ128A | | PAGE 1 OF 2 |

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS ARE OBSOLETE 5340-1722

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:53Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5340

REQUIREMENTS:

1. MATERIAL:

   BODY: STEEL, IN ACCORDANCE WITH ASTM A506 LOW CARBON, COLD ROLLED.

   PIN: BRASS, IN ACCORDANCE WITH QQ-B-626, COMPOSITION 11, HARD OR CORROSION-RESISTANT STEEL, IN ACCORDANCE WITH ASTM A666.

2. PROTECTIVE COATING: CADMIUM PLATED, IN ACCORDANCE WITH QQ-P-416, TYPE II, CLASS 2. ZINC PLATED IN ACCORDANCE WITH ASTM B633 Fe/Zn13, TYPE II OR MIL-C-81562, TYPE II, CLASS 2.

3. PART NUMBER: THE MS PART NUMBER CONSISTS OF THE MS NUMBER, PLUS THE DASH NUMBER TAKEN FROM TABLE I.

   EXAMPLE: MS27966-2
   - DASH NUMBER
   - BASIC MS NUMBER

   MS27961-2 - INDICATES HINGE, BUTT, NARROW, NON-TEMPLATE, STEEL, LENGTH, .125 WIDTH, 1.37, THICKNESS, .065.

NOTES:

1. SCREWS: HINGES ARE FURNISHED WITH WOOD SCREWS. THE SIZES SPECIFIED ARE THOSE NORMALLY FURNISHED BY THE SUPPLIER.
2. SIZE: THE WIDTH DIMENSION OF NOT SWAGED HINGE WILL BE SLIGHTLY NARROWER THAN SHOWN.
3. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.
4. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
5. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION, FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

USER ACTIVITIES:
ARMY - AV, ME
NAVY - MC

REVIEWER ACTIVITIES:
ARMY - EA, GL
NAVY - SH
AIR FORCE - 82
DLA - IS

APPROVED 24 FEB 61 REVISED (8) FOR CHANGES SEE PAGES 1 AND 2

| P.A. | INTERNATIONAL INTEREST | TITLE | MILITARY STANDARD |
|---|---|---|---|
| ARMY - AR<br>Other Cust<br>NAVY - YD<br>AIR FORCE-99 | | HINGE, BUTT-NARROW, NON-TEMPLATE | MS27966 |
| PROCUREMENT SPECIFICATION<br>ANSI A156.1 | SUPERSEDES<br>SHEXI, MQI28A | | PAGE 2 OF 2 |

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5340-1722

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:53Z
Check the source to verify that this is the current version before use.