
FED. SUP CLASS
5940

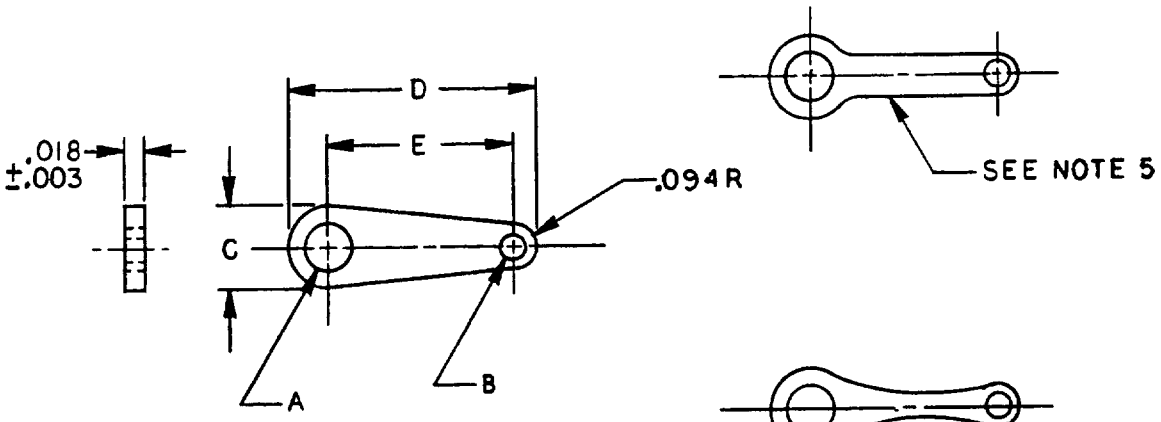

OPTIONAL
BODY DESIGNS

	DASH NO	WIRE SIZE AWG NOM	STUD SIZE	A HOLE DIA MIN	A HOLE DIA MAX	B DIA	C DIA	D	E	
G	12	12	2	.090	.096	.046	.187	.328	.187	G
G	13					.072	.234	.500	.312	G
G	14		2	.090	.096	.094	.250	.516	.312	
G	15						.312	.625	.375	
	1		4	.115	.127			.625	.375	
	2							.875	.625	
	3		6	.141	.153			.625	.375	
	4							.875	.625	
	5		8	.167	.179			.625	.375	
	6							.875	.625	
	7		10	.193	.205			.625	.375	
	8							.875	.625	
	9		.250	.253	.265		.375	.812	.531	
	10	10	.312	.313	.322	.130	.469	.875	.500	G
G	11	16	.312	.313	.322	.062	.469	.875	.500	G

SEE PAGE 2 FOR SUPERSESSION DATA

G DENOTES CHANGES

APPROVED 5 JULY 1955, REVISED G 16 FEB 1987

User Activities
NAVY-AS, MC
AIR FORCE- 11

Reviewer Activities
ARMY-MI, AV
AIR FORCE- 99
DSC- GS

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited
This military standard is Approved for use by all Departments and Agencies
of the Department of Defense. Selection for all new engineering and design
applications and for repetitive use shall be made from this document., when applicable

P.A. AR
Other Cust 85

INTERNATIONAL INTEREST

TITLE: TERMINAL, LUG, SOLDER TYPE, COPPER STAMPING, ONE HOLE, FLAT

MILITARY STANDARD
MS 35431

PROCUREMENT SPECIFICATION
MIL-T-15659

SUPERSEDES:

PAGE 1 OF 2

AMSC N/A DD FORM 1 MAY 72 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5940-B034

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:23Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments And Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

User Activities
NAVY-AS, MC
AIR FORCE- 11

Reviewer Activities
ARMY-MI, AV
AIR FORCE- 99
DSC- GS

SUPERSESSION DATA

MS PART NO	FORMER MS PART NO
MS 35431-12	MS 35431-1A REV D/E
MS 35431-13	MS 35431-1B REV D/E
MS 35431-14	MS 35431-1A REV F
MS 35431-15	MS 35431-1B REV F

(G)

MATERIAL COPPER, ANNEALED- SPECIFICATION QQ-C-576
FINISH HOT TIN DIP OR ELECTRODEPOSIT TIN ALL OVER, MINIMUM THICKNESS 0005 INCHES

NOTES:-

1 DIMENSIONS ARE IN INCHES

2 UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ± 015.

3 REMOVE ALL BURRS.

4 THE MS PART NUMBER CONSIST OF THE MS NUMBER PLUS THE DASH NUMBER

5 DASH NO - 9 SHALL CONFORM TO THIS DESIGN

6 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD TAKES PRECEDENCE

7 REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN

APPROVED 5 JULY 1955 REVISED (G) FOR CHANGES SEE PAGES 1 AND 2

(G) DENOTES CHANGES

P A AR Other Cust 85	INTERNATIONAL INTEREST	TITLE TERMINAL, LUG, SOLDER TYPE, COPPER STAMPING, ONE HOLE, FLAT	MILITARY STANDARD MS 35431
PROCUREMENT SPECIFICATION MIL-T-15659	SUPERSEDES:		PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:23Z
Check the source to verify that this is the current version before use.