

FED. SUP CLASS
5310

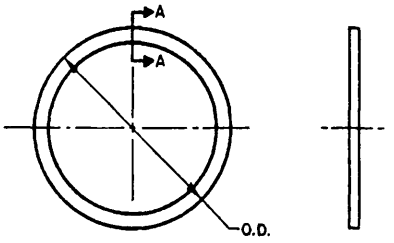

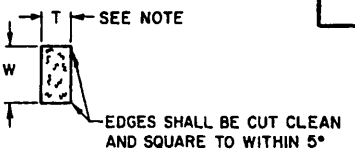

SECTION A-A

DASH NO.	ACTUAL SIZE O.D. ±.007	W ±.007	T ±.010
6	.250	.057	.062
7	.281	.057	.062
8	.312	.057	.062
9	.344	.057	.062
10	.375	.057	.062
11	.438	.057	.062
12	.500	.057	.062
110	.562	.090	.062
111	.625	.090	.062
112	.688	.090	.062
113	.750	.090	.062
114	.812	.090	.062
115	.875	.090	.062
116	.938	.090	.062

DASH NO.	ACTUAL SIZE O.D. ±.1/64	W +.010 −.005	T ±.010
210	1	.123	.062
211	1-1/16	.123	.062
212	1-1/8	.123	.062
213	1-3/16	.123	.062
214	1-1/4	.123	.062
215	1-5/16	.123	.062
216	1-3/8	.123	.062
217	1-7/16	.123	.062
218	1-1/2	.123	.062
219	1-9/16	.123	.062
220	1-5/8	.123	.062
221	1-11/16	.123	.062
222	1-3/4	.123	.062
223	1-7/8	.123	.062
224	2	.123	.062
225	2-1/8	.123	.062
226	2-1/4	.123	.062
227	2-3/8	.123	.062
228	2-1/2	.123	.062
229	2-5/8	.123	.062

DASH NO.	ACTUAL SIZE O.D. ±.1/64	W +.010 −.005	T ±.010
230	2-3/4	.123	.062
231	2-7/8	.123	.062
232	3	.123	.062
233	3-1/8	.123	.062
234	3-1/4	.123	.062
235	3-3/8	.123	.062
236	3-1/2	.123	.062
237	3-5/8	.123	.062
238	3-3/4	.123	.062
239	3-7/8	.123	.062
240	4	.123	.062
241	4-1/8	.123	.062
242	4-1/4	.123	.062
243	4-3/8	.123	.062
244	4-1/2	.123	.062
245	4-5/8	.123	.062
246	4-3/4	.123	.062
247	4-7/8	.123	.062
325	1-7/8	.188	.094
326	2	.188	.094
327	2-1/8	.188	.094
328	2-1/4	.188	.094
329	2-3/8	.188	.094
330	2-1/2	.188	.094
331	2-5/8	.188	.094
332	2-3/4	.188	.094
333	2-7/8	.188	.094
334	3	.188	.094
335	3-1/8	.188	.094
336	3-1/4	.188	.094
337	3-3/8	.188	.094
338	3-1/2	.188	.094
339	3-5/8	.188	.094
340	3-3/4	.188	.094
341	3-7/8	.188	.094
342	4	.188	.094
343	4-1/8	.188	.094
344	4-1/4	.188	.094
345	4-3/8	.188	.094
346	4-1/2	.188	.094

DASH NO.	ACTUAL SIZE O.D. ±.1/64	W +.010 −.005	T ±.010
347	4-5/8	.188	.094
348	4-3/4	.188	.094
349	4-7/8	.188	.094
425	5	.240	.125
426	5-1/8	.240	.125
427	5-1/4	.240	.125
428	5-3/8	.240	.125
429	5-1/2	.240	.125
430	5-5/8	.240	.125
431	5-3/4	.240	.125
432	5-7/8	.240	.125
433	6	.240	.125
434	6-1/8	.240	.125
435	6-1/4	.240	.125
436	6-3/8	.240	.125
437	6-1/2	.240	.125
438	6-3/4	.240	.125
439	7	.240	.125
440	7-1/4	.240	.125
441	7-1/2	.240	.125
442	7-3/4	.240	.125
443	8	.240	.125
444	8-1/4	.240	.125
445	8-1/2	.240	.125
446	9	.240	.125
447	9-1/2	.240	.125
448	10	.240	.125
449	10-1/2	.240	.125
450	11	.240	.125
451	11-1/2	.240	.125
452	12	.240	.125
453	12-1/2	.240	.125
454	13	.240	.125
455	13-1/2	.240	.125
456	14	.240	.125
457	14-1/2	.240	.125
458	15	.240	.125
459	15-1/2	.240	.125
460	16	.240	.125

NOTES:

1. MATERIAL: LEATHER IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.
2. THICKNESS: THE THICKNESS SHALL NOT VARY MORE THAN .010 BETWEEN ANY TWO POINTS ON A WASHER.
3. DIMENSIONS: ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.
4. PART NUMBERS: THE MS PART NUMBER CONSISTS OF THE MS NUMBER, PLUS THE DASH NUMBER. EXAMPLE: MS35803-6
5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HERE-IN.
6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

(A) ENTIRE STANDARD REVISED

APPROVED 22 MAY 1957 REVISED (A) 30 JANUARY 1970

User activities: AT WC AS

Review activities: DSA-IS AV MI

This standard is approved by the Department of Defense and is mandatory for all new engineering and design activities. Selection for all new engineering and design applications for repetitive use shall be made from this document.

P.A. USAF-82 Other Cust USAF-82 Army-AV	TITLE WASHER, AIRCRAFT HYDRAULIC PACKING BACK-UP	MILITARY STANDARD MS35803
PROCUREMENT SPECIFICATION MIL-W-5521	SUPERSEDES:	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:28Z
Check the source to verify that this is the current version before use.