
FED. SUP CLASS
3030

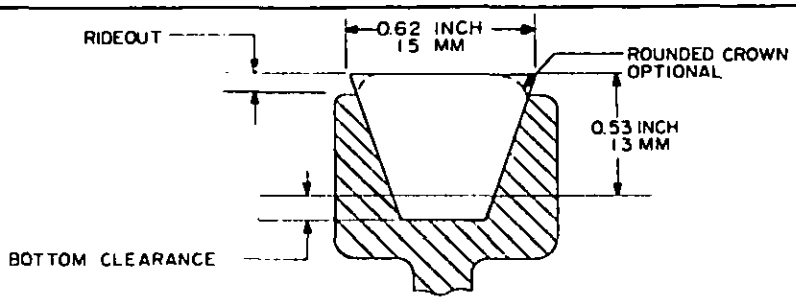

5V AND 15N BELT DIMENSIONS, CROSS SECTION, NOMINAL.

EFFECTIVE OUTSIDE LENGTH		LENGTH TOLERANCE (PLUS OR MINUS)		DASH NUMBER		MATCHING LIMITS FOR ONE SET		OLD DASH NUMBER
INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH
50.0	1270	0.3	8	-5V500	-15N1270	0.15	4	-050
53.0	1345	0.4	10	-5V530	-15N1345	0.15	4	-053
56.0	1420	0.4	10	-5V560	-15N1420	0.15	6	-056
60.0	1525	0.4	10	-5V600	-15N1525	0.15	6	-060
63.0	1600	0.4	10	-5V630	-15N1600	0.15	6	-063
67.0	1700	0.4	10	-5V670	-15N1700	0.30	6	-067
71.0	1800	0.4	10	-5V710	-15N1800	0.30	6	-071
75.0	1900	0.4	10	-5V750	-15N1900	0.30	6	-075
80.0	2030	0.4	10	-5V800	-15N2030	0.30	6	-080
85.0	2160	0.5	13	-5V850	-15N2160	0.30	6	-085
90.0	2290	0.5	13	-5V900	-15N2290	0.30	6	-090
95.0	2410	0.5	13	-5V950	-15N2410	0.30	6	-095
100.0	2540	0.5	13	-5V1000	-15N2540	0.30	6	-100
106.0	2690	0.6	15	-5V1060	-15N2690	0.30	6	-106
112.0	2840	0.6	15	-5V1120	-15N2840	0.30	10	-112
118.0	3000	0.6	15	-5V1180	-15N3000	0.30	10	-118
125.0	3180	0.6	15	-5V1250	-15N3180	0.30	10	-125
132.0	3350	0.6	15	-5V1320	-15N3350	0.30	10	-132
140.0	3550	0.6	15	-5V1400	-15N3550	0.30	10	-140
150.0	3810	0.8	20	-5V1500	-15N3810	0.30	10	-150
160.0	4060	0.8	20	-5V1600	-15N4060	0.45	10	-160
170.0	4320	0.8	20	-5V1700	-15N4320	0.45	10	-170
180.0	4570	0.8	20	-5V1800	-15N4570	0.45	10	-180
190.0	4830	0.8	20	-5V1900	-15N4830	0.45	10	-190
200.0	5080	0.8	20	-5V2000	-15N5080	0.45	10	-200
212.0	5380	0.8	20	-5V2120	-15N5380	0.45	10	-212
224.0	5690	0.8	20	-5V2240	-15N5690	0.45	10	-224
236.0	6000	0.8	20	-5V2360	-15N6000	0.45	10	-236
250.0	6350	0.8	20	-5V2500	-15N6350	0.45	16	-250
265.0	6730	0.8	20	-5V2650	-15N6730	0.60	16	-265
280.0	7100	0.8	20	-5V2800	-15N7100	0.60	16	-280
300.0	7620	0.8	20	-5V3000	-15N7620	0.60	16	-300
315.0	8000	1.0	25	-5V3150	-15N8000	0.60	16	-315
335.0	8500	1.0	25	-5V3350	-15N8500	0.60	16	-335
355.0	9000	1.0	25	-5V3550	-15N9000	0.60	16	-355

ENTIRE STANDARD REVISED

APPROVED 25 FEB 66 REVISED (A) 22 JUNE 1981

REVIEW ACTIVITIES CS
USER ACTIVITIES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

P.A. ME
Other Cust 99

INTERNATIONAL INTEREST

TITLE
BELTS, "V": INDUSTRIAL (NARROW TYPE) "5V" AND "15N" SECTIONAL DESIGNATION.

MILITARY STANDARD
MS39278

PROCUREMENT SPECIFICATION
MIL-B-52919

SUPERSEDES

SHEET 1 OF 2

DD FORM 672-1 (COORDINATED)

3030-0132

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:50Z
Check the source to verify that this is the current version before use.

FED SUP CLASS 3030

NOTES.

1. DIMENSIONS ARE IN INCHES AND MILLIMETERS (MM).
2. TO ORDER REQUIRED BELT SIZE SPECIFY ONLY ONE DASH NUMBER, EITHER -5V SERIES FOR INCH MEASUREMENT OR -15N SERIES FOR MILLIMETER MEASUREMENT.
3. THE MILLIMETER UNITS CHOSEN FOR THIS STANDARD ARE NOT ALWAYS AN EXACT ARITHMETIC CONVERSION OF THE CORRESPONDING INCH UNITS.
4. THE EFFECTIVE BELT LENGTHS ARE OBTAINED USING STANDARD MEASURING PULLEYS AND TENSIONED AS SPECIFIED BY MIL-B-52919
5. THE DASH NUMBERS CORRESPOND TO INDUSTRY STANDARD BELT NUMBERS EXAMPLE: -5V500, 5V INDICATES CROSS SECTIONAL DESIGNATION IN INCHES, 500 INDICATES EFFECTIVE BELT LENGTH IN TENTHS OF AN INCH; -15N1270, 15N INDICATES CROSS SECTIONAL DESIGNATION IN MILLIMETERS, 1270 INDICATES EFFECTIVE BELT LENGTH IN MILLIMETERS.
6. OIL-RESISTANCE. SEE APPLICABLE PARAGRAPH IN MIL-B-52919. WHEN OIL-RESISTANCE IS REQUIRED THE FIRST DASH IN THE PART NUMBER SHALL BE REPLACED BY THE LETTER "R".

EXAMPLE: MS 39278 R 5V500

- CROSS SECTIONAL DESIGNATION AND EFFECTIVE OUTSIDE LENGTH IN TENTHS OF AN INCH.
- OIL-RESISTANCE REQUIRED.

7. THE MS PART NUMBER FOR MATCHED SETS SHALL CONSIST OF THE MS SHEET NUMBER, PLUS OIL-RESISTANCE (WHEN REQUIRED) PLUS THE DASH NUMBER, PLUS THE QUANTITY OF BELTS IN ONE SET.

EXAMPLES: MS 39278-5V500 04

- NUMBER OF BELTS IN THE SET.
- CROSS SECTIONAL DESIGNATION AND EFFECTIVE OUTSIDE LENGTH IN TENTHS OF AN INCH.

MS 39278 R 15N1270 04

- NUMBER OF BELTS IN THE SET.
- CROSS SECTIONAL DESIGNATION AND EFFECTIVE OUTSIDE LENGTH IN MILLIMETERS
- OIL-RESISTANCE REQUIRED

8. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
9. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS, SHALL GIVE THE DATE OF THE ISSUE ADOPTED

APPROVED 25 FEB 66 REVISED (A) FOR CHANGES SEE SHEETS 1 AND 2

P A ME / Direct Cost 99	INTERNATIONAL INTEREST	TITLE: BELTS, "V" INDUSTRIAL (NARROW TYPE), "5V" AND "15N" SECTIONAL DESIGNATION.	MILITARY STANDARD MS 39278
PROCUREMENT SPECIFICATION MIL-B-52919	SUPERSEDES		SHEET 2 OF 2

DD FORM 672-1 (COORDINATED)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:50Z
Check the source to verify that this is the current version before use.