
FED. SUP CLASS
6640

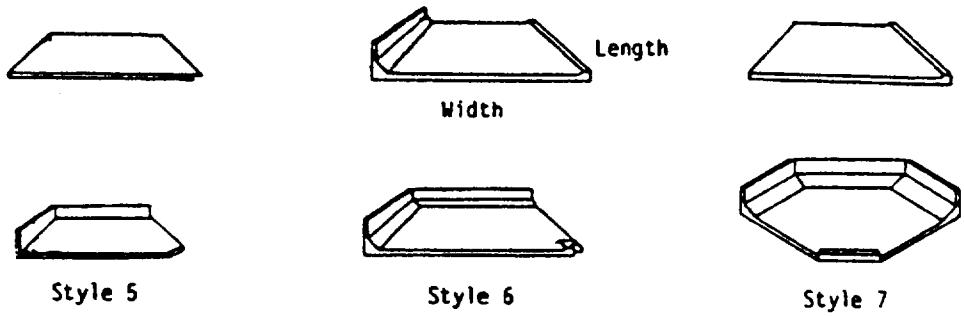

MATERIAL: Tops shall be fabricated of the following mate s:

Type 1 - Molded epoxy, color bl
Type 2 - Furan resin-coat
Type 3 - Melamin
Type 4 -
T

lakeboard core.

CANCELLED
CANCELLED AFTER 21 AUG 1991
NO SUPERSEDING STANDARD

DESIG s:

	DIMENSIONS				
	Width		Length of Styles 1-4		
	in	mm		in	mm
W1	24	610	L1	18.3	466
W2	29	737	L2	25.3	643
W3	30	762	L3	35	889
			L4	47	1194

Tops shall be furnished in the types, styles, and dimensions as specified. The part number for a specific top shall be MS51430 plus the proper suffix numbers and letters to identify the top; for example, MS51430-T1-S3-W1-L1 is the part number for a molded epoxy top with backsplash and raised lip, 24 inches wide and 18.3 inches long.

The backsplash shall be 4 inches high for both molded and fabricated top. The thickness of types 1, 2, and 3 shall be 0.75 inch, types 4 and 5 shall be 1.25 inches thick.

Type 6, stainless steel top, shall have channel reinforcing members welded in place, factory made joints, exposed ends and corners shall be continuous heliarc welded, ground and polished smooth. The resultant

(A) CANCELLATION

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
EA		TOP, LABORATORY BASE UNITS AND TABLES	MS51430
Other Cust MS 99			
Procurement Specifications NONE	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE CANCELLATION

Project Number 6640-1726-05

APPROVED 27 JUL 1983 REVISED (A) 21 AUG 1991

USER ACTIVITIES: ARMY - MD, DM
NAVY - MS

REVIEWER ACTIVITIES: ARMY - ME
NAVY - OS
AIR FORCE - 82

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:01Z
Check the source to verify that this is the current version before use.

exposed surface shall have No. 4 finish. The underside shall be coated with sound-deadening material.

Types 4 and 5 tops shall have all exposed surfaces and edges finished smoothly. These are available in styles 1, 2, and 5 only.

NOTES:

1. Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements specified herein.

2. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

3. Referenced documents shall be of the issue in effect on date of invitations for bid.

4. FSCMs: 11876, 14095, and 22527.

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made this document.

APPROVED REVISED

P.A. Other Cust	INTERNATIONAL INTEREST	TITLE TOP, LABORATORY BASE UNITS AND TABLES	MILITARY STANDARD MS51430
Procurement Specifications	SUPERSEDES:		SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:01Z
Check the source to verify that this is the current version before use.