
FED. SUP CLASS
5940

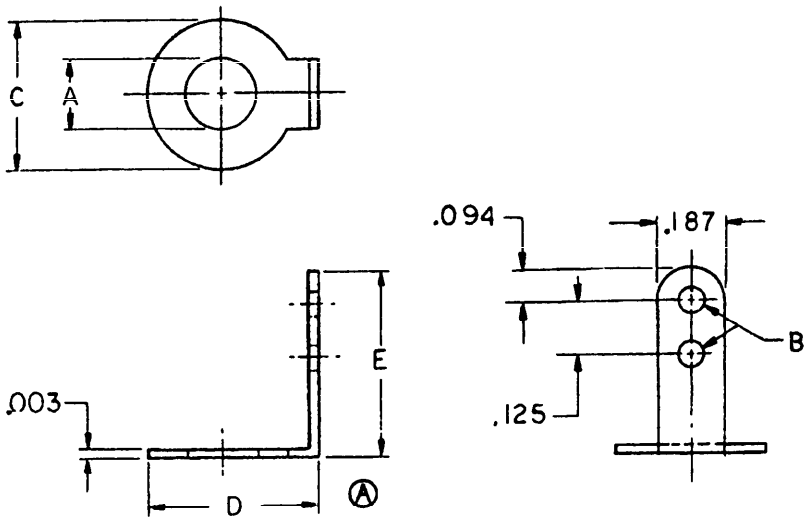

DASH NO	WIRE SIZE AWG NON	STUD SIZE	A HOLE DIA MIN	A HOLE DIA MAX	B DIA	C DIA	D	E
1	12	2	.090	.096	.094	.312	.312	.437
2		4	.115	.127				
3		6	.141	.153				
4		8	.167	.179				
5		10	.193	.205				
6		.250	.253	.257		.375	.375	.500
7	10	.315	.318	.322	.130	.469	.469	.593

Ⓐ

MATERIAL: Copper, annealed - specification QQ-C-576.

FINISH: Hot tin dip or electroplated tin all over, minimum thickness .0005 inches.

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ± .015.
3. Remove all burrs.
4. The MS part number consists of the MS number plus the dash number.
5. In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.
6. Rererenced Government (or nongovernment) documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this standard to the extent specified herein.

Ⓑ CANCELLED FOR RROCUREMENT USE MS51560

Ⓐ DENOTES CHANGES

APPROVED 6 FEB 1985 REVISED Ⓐ 5 SEPT 1985 Ⓑ 23 JUNE 1986

USER ACTIVITIES: NAVY - AS, MC
AIR FORCE - 11

REVIEWER ACTIVITIES: ARMY - MI, AV
AIR FORCE - 99
DSC - GS

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P. A.	AR	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust	85		TERMINAL, LUG, SOLDER TYPE, COPPER STAMPING, TWO HOLE, 90°	MS 51537
PROCUREMENT SPECIFICATION: MIL-T-15659		SUPERSEDES:		PAGE 1 OF 1

AMSC N/A DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5940

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:06Z
Check the source to verify that this is the current version before use.