
MS9374 (ASG)

FED SUP CLASS 5330

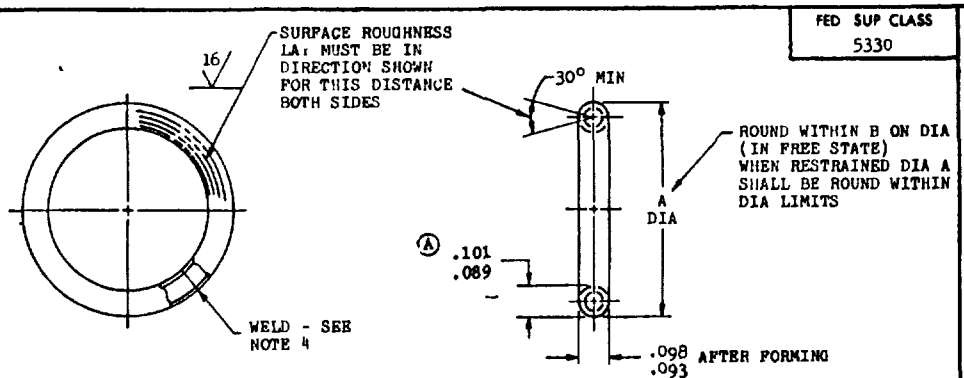

PART NO.	A +.005 -.000	B	APPROX WEIGHT LB/100	PART NO.	A +.005 -.000	B	APPROX WEIGHT LB/100	PART NO.	A +.005 -.000	B	APPROX WEIGHT LB/100
*MS9374-010	1.000	.030	.245	*MS9374-047	2 750	.060	.674	MS9374-107	6.500	.090	1.590
MS9374-012	1.031	.030	.252	MS9374-048	2.812	.060	.690	MS9374-111	6.750	.090	1.653
MS9374-013	1.062	.030	.261	MS9374-049	2.875	.060	704	*MS9374-115	7.000	.090	1.715
MS9374-014	1.094	.030	.268	MS9374-050	2.938	.060	.719	MS9374-119	7.250	.090	1.776
*MS9374-015	1.125	.030	.274	*MS9374-051	3.000	060	.735	MS9374-123	7.500	.090	1.840
MS9374-016	1.156	.030	.284	MS9374-052	3.062	.060	.750	MS9374-127	7.750	.090	1.900
MS9374-017	1.188	.030	.290	MS9374-053	3.125	.060	.765	*MS9374-131	8.000	.090	1.960
MS9374-018	1.219	.030	.299	MS9374-054	3.188	.060	.780	MS9374-135	8.250	.090	2.020
*MS9374-019	1.250	.030	.306	MS9374-055	3.250	.060	.796	MS9374-139	8.500	.090	2.090
MS9374-020	1.281	.030	.313	MS9374-056	3 312	.060	.810	MS9374-143	8.750	.090	2.145
MS9374-021	1.312	.030	.322	MS9374-057	3.375	060	.825	*MS9374-147	9.000	.090	2.205
MS9374-022	1.344	.030	.329	MS9374-058	3.438	.060	.841	MS9374-151	9.250	.090	2.270
*MS9374-023	1.375	.030	.336	MS9374-059	3.500	.060	.858	MS9374-155	9.500	.090	2.328
MS9374-024	1.406	.030	.345	MS9374-060	3.562	.060	.874	MS9374-159	9.750	.090	2.390
MS9374-025	1.438	.030	.352	MS9374-061	3.625	.060	.888	*MS9374-163	10.000	.090	2.450
MS9374-026	1.469	.030	.360	MS9374-062	3.688	.060	.904	MS9374-167	10.250	.125	2.510
*MS9374-027	1.500	.030	.368	MS9374-063	3 750	.060	.920	MS9374-171	10.500	.125	2.575
MS9374-028	1.562	.030	.383	MS9374-064	3.812	.060	.935	MS9374-175	10.750	.125	2.635
MS9374-029	1.625	.030	.397	MS9374-065	3.875	.060	.949	*MS9374-179	11.000	.125	2.695
MS9374-030	1.688	.030	.413	MS9374-066	3.938	.060	.965	MS9374-183	11.250	.125	2.760
*MS9374-031	1.750	.030	.428	*MS9374-067	4.000	.060	.980	MS9374-187	11.500	.125	2.820
MS9374-032	1.812	.030	.445	MS9374-069	4.125	.060	1.010	MS9374-191	11.750	.125	2.880
MS9374-033	1.875	.030	.458	MS9374-071	4 250	.060	1 040	*MS9374-195	12.000	.125	2.940
MS9374-034	1.938	.030	.475	MS9374-073	4.375	.060	1.070				
*MS9374-035	2.000	.030	.490	MS9374-075	4 500	.060	1.102				
MS9374-036	2.062	.030	.505	MS9374-077	4.625	.060	1.131				
MS9374-037	2.125	.030	.520	MS9374-079	4.750	.060	1.165				
MS9374-038	2.188	.030	.535	MS9374-081	4.875	.060	1.193				
*MS9374-039	2.250	.030	.551	*MS9374-083	5.000	.060	1.225				
MS9374-040	2.312	.030	.567	MS9374-085	5.125	.090	1.255				
MS9374-041	2.375	.030	.581	MS9374-087	5.250	.090	1.288				
MS9374-042	2.438	.030	.596	MS9374-089	5.375	.090	1.318				
*MS9374-043	2.500	.030	.613	MS9374-091	5.500	.090	1.350				
MS9374-044	2.562	.060	.628	MS9374-095	5.750	.090	1.410				
MS9374-045	2.625	.060	.642	*MS9374-099	6.000	.090	1 470				
MS9374-046	2.688	.060	.658	MS9374-103	6.250	.090	1.530				

1. RING SHALL BE FLAT WITHIN B.
2. *PREFERRED SIZES.
3. MATERIAL: CORROSION AND HEAT RESISTANT STEEL TUBING AMS 5570 OR AMS 5576. TUBE SIZE .093-.097 DIA., WALL THICKNESS .005-.007.
4. Ⓐ FINISH WELD FLUSH WITH TUBE OD. SMOOTH BLEND WITHIN .125 OF WELD. DIMENSIONS AT BLEND SHALL NOT BE MORE THAN .004 BELOW ADJACENT SURFACES.
5. FINISH SILVER PLATE AMS 2410 .0010-.0015 THICK.DIMENSIONS TO BE MET BEFORE PLATING. CONTACT POINTS PERMISSIBLE ON ID OF RING.
6. SURFACE ROUGHNESS. AS 291.
7. MANUFACTURING SPECIFICATION: AMS 7325
8. IDENTIFICATION MARK MS9374-XXX & MANUFACTURER'S IDENTIFICATION ON CONTAINER.
9. DIMENSIONS IN INCHES.
10. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE

Reviewers and Users: USAF - 11 Navy - AS

Ⓐ REVISED 20 Jan 1967

APPROVED 19 Jan 64

This standard has been approved by the USAF (11) and the Department of the Navy and is mandatory for use by the activity. All other military activities are required to employ this standard where suitable.

PA	TITLE	MILITARY STANDARD
USAF - 11 Other Cust Navy - AS	GASKET - METAL O-RING, .094 TUBE X .006 WALL, SILVER PLATED	MS9374 (ASG)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

*U.S. GOVERNMENT PRINTING OFFICE: 1967-241-814/6838

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:15Z
Check the source to verify that this is the current version before use.