
MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, AIRCRAFT AUDIO, MOLDED RUBBER CONNECTOR (QUICK DISCONNECT)

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of specification MIL-C-22442(AS).

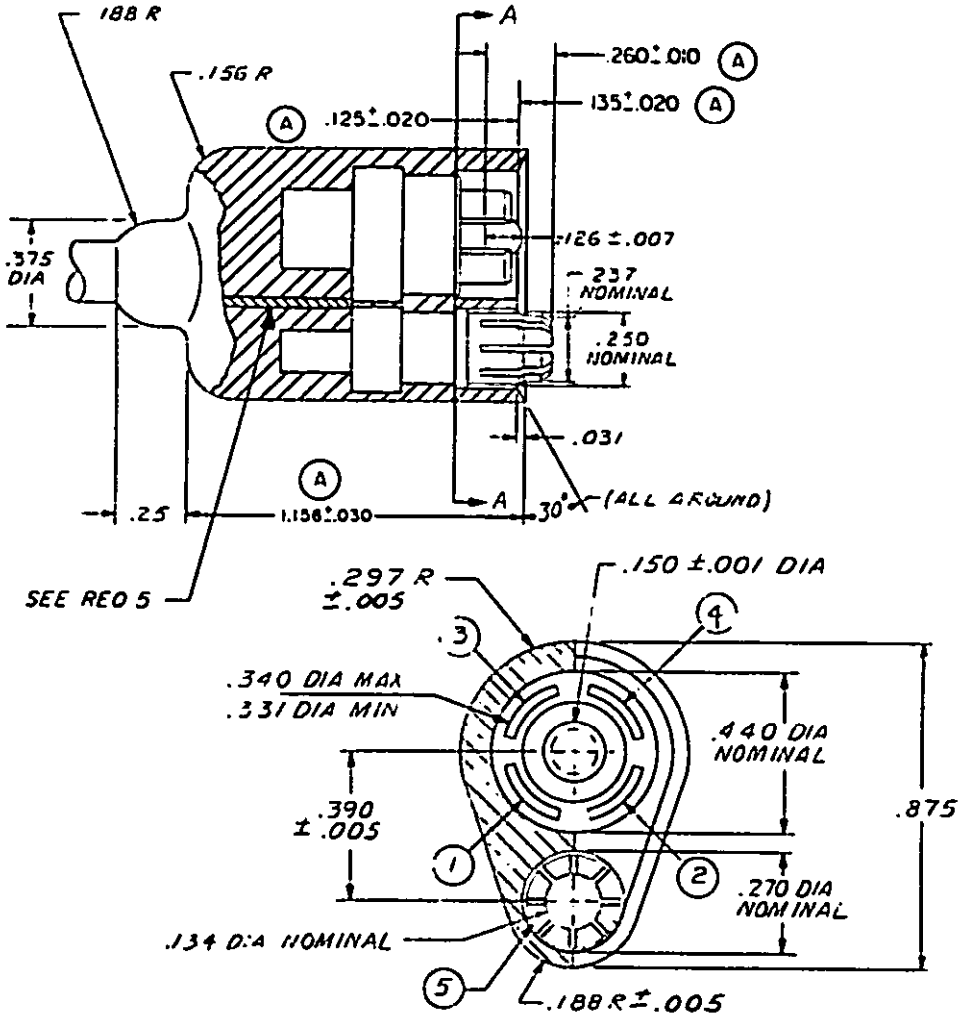

NOTE: (1) THRU (5) DENOTES WIRE DESIGNATIONS

FIGURE 1. Molded Rubber Connector Notched Contact Assembly P/N M22442/2-1

* U.S. GOVERNMENT PRINTING OFFICE: 1983 — 705-040/5136

FSC 5995

Source: https://assist.dla.mil -- Downloaded: 202640-19T12:22Z
Check the source to verify that this is the current version before use.

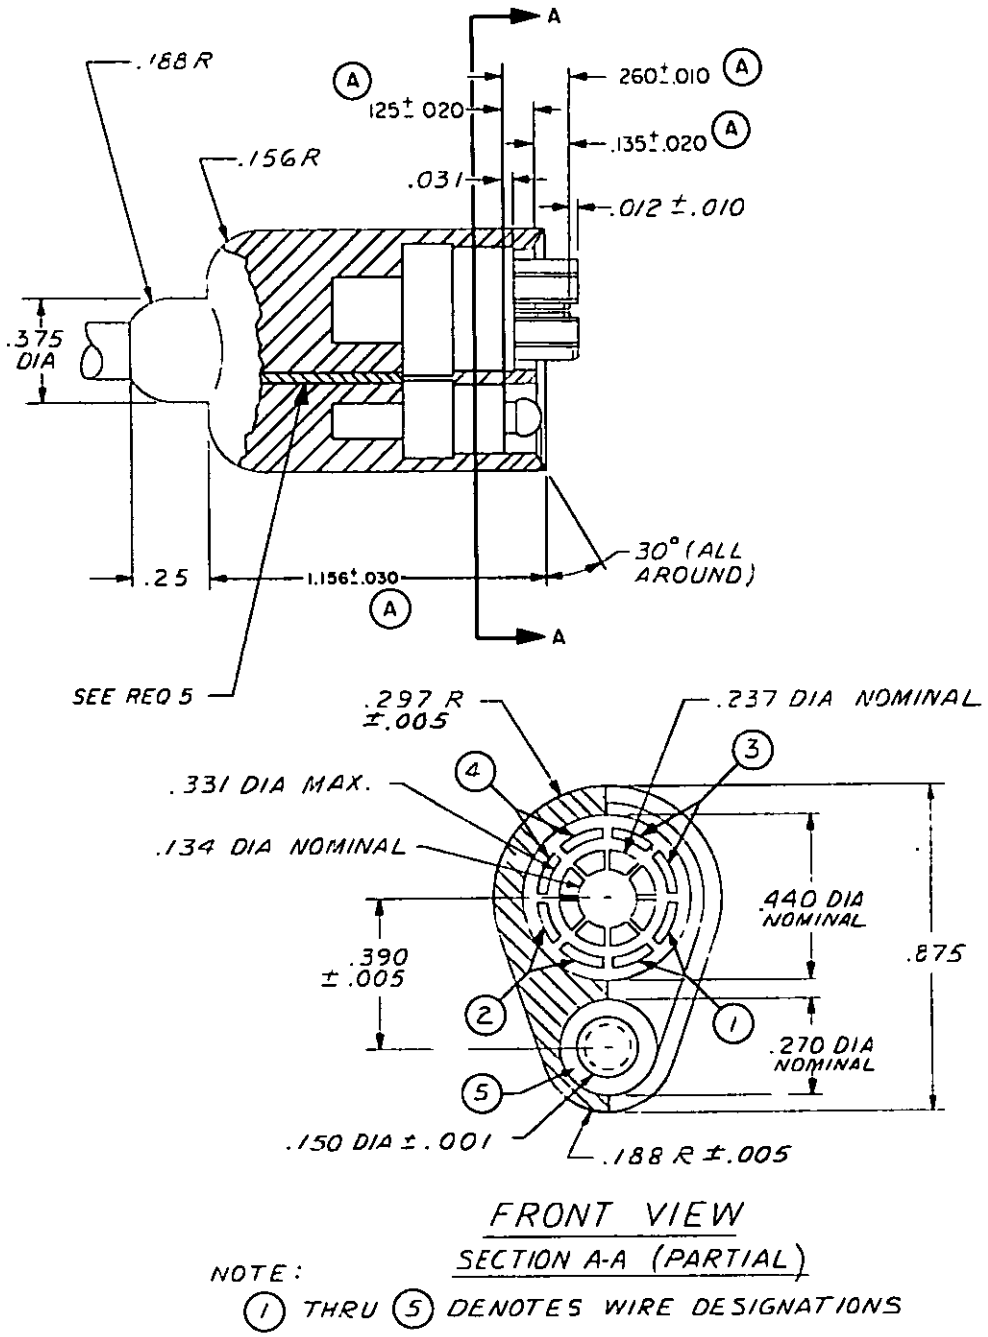


FIGURE II. Molded Rubber Connector Slotted Contact Assembly
P/N M22442/2-2

Source: https://assist.dla.mil -- Downloaded: 202640-19T12:22Z
Check the source to verify that this is the current version before use.

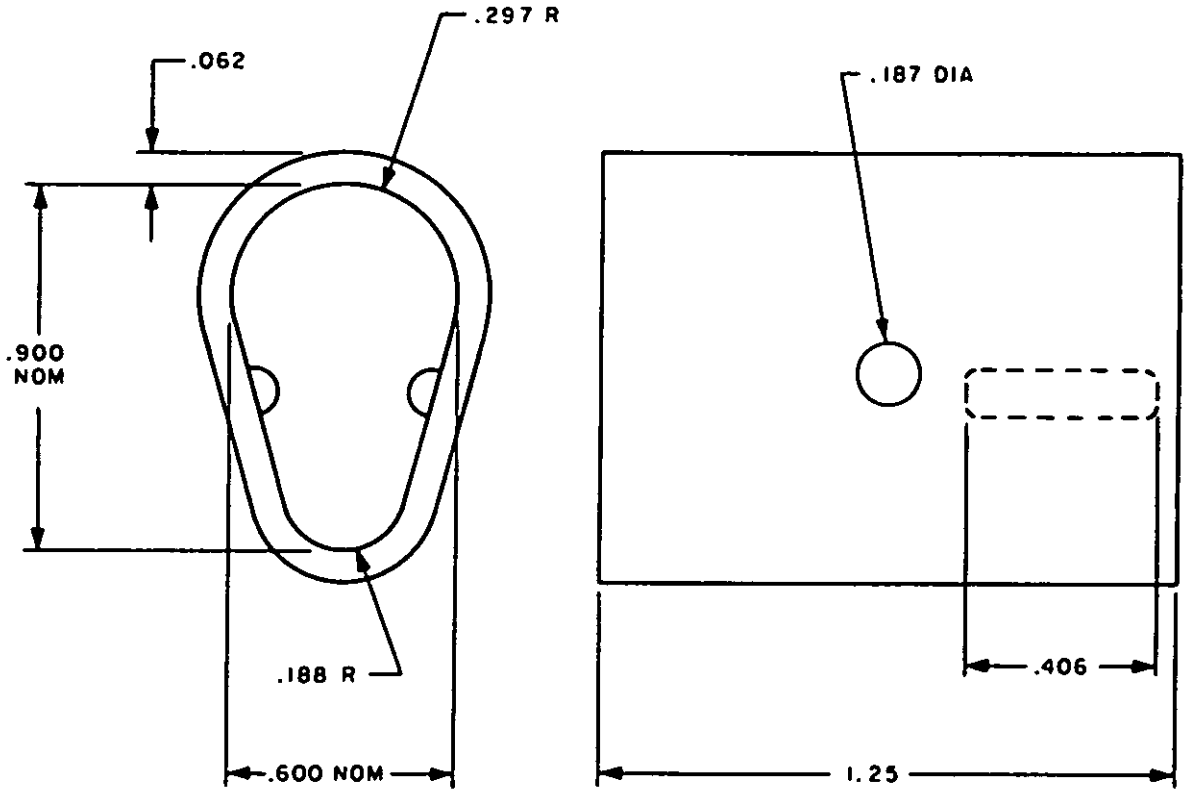


FIGURE 3 SLEEVE
P/N M22442/2-3

Source: https://assist.dla.mil -- Downloaded: 202640-19T12:22Z
Check the source to verify that this is the current version before use.

APPLICABLE DOCUMENTS:

L-P-410	Plastic, polyamide (nylon), rigid, rods, tubes, flats, molded and cast parts.
MIL-R-6855	Rubber, synthetic, sheets, strips, molded or extruded shapes.

REQUIREMENTS:

1. The connectors shall be checked in accordance with Table I of the applicable detail Specification Sheet for interfacial dimensions with all the mechanical gauges specified in MIL-C-22442/25.

2. The contractor shall acquire and maintain mechanical gauges and gauge cases in accordance with MIL-C-22442/25.

3. The rubber covering shall be in accordance with MIL-R-6855 Class II, Type A, GR 60.

4. The force required to unmate the connector in an axial direction when mated with a M22442/2-2 connector shall be 15 ± 2 pounds. In any direction other than axial the force shall be 4 pounds minimum and 15 pounds maximum.

5. The stay cord shall be securely fastened to the contact assemblies.

6. Sleeve P/N M22442/2-3 must be slip fit on connectors M22442/2-1 and M22442/2-2.

7. Sleeve P/N M22442/2-3 shall be made of plastic polyamide (nylon) in accordance with L-P-410.

NOTES:

1. Dimensions are in inches unless otherwise specified. Tolerances ±.015 unless otherwise specified.

(A) 2. The maximum and minimum height of the contact's metal to metal (.260 ±.010) may be checked using a depth micrometer with a modified blade.

(A) 3. The maximum and minimum height of the metal contact to the rubber base (.135 ±.020) may be checked using a depth micrometer with a modified blade.

Preparing Activity
Navy - AS
Project No. 5995-N110-2

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:22Z
Check the source to verify that this is the current version before use.