
MILITARY SPECIFICATION SHEET

(B) CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO), MOLDED RUBBER CONNECTOR (QUICK DISCONNECT)

(B) Inactive for new design after 2 September 1988.
For new design use MIL-P-642/14 or MIL-J-641/20.

This specification is approved for use by the Naval Air Systems Command, Department of Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of specification MIL-C-22442.

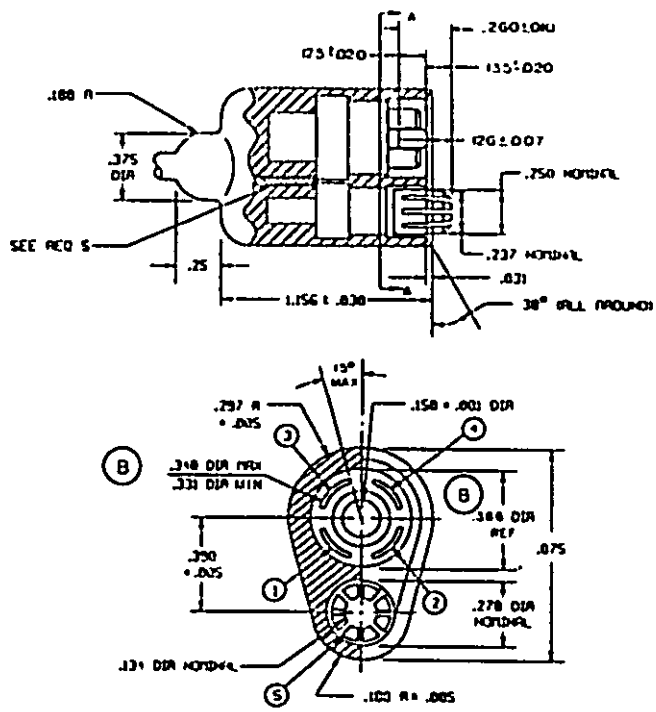

FRONT VIEW
SECTION A-A (PARTIAL)


NOTE:
(1) THRU (5) DENOTES WIRE DESIGNATION
FOR INTERFACE DIMENSIONS SEE REQUIREMENT 1.


FIGURE 1. Molded rubber connector notched contact assembly P/N M22442/2-1.

AMSC N/A FSC 5995

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:22Z
Check the source to verify that this is the current version before use.

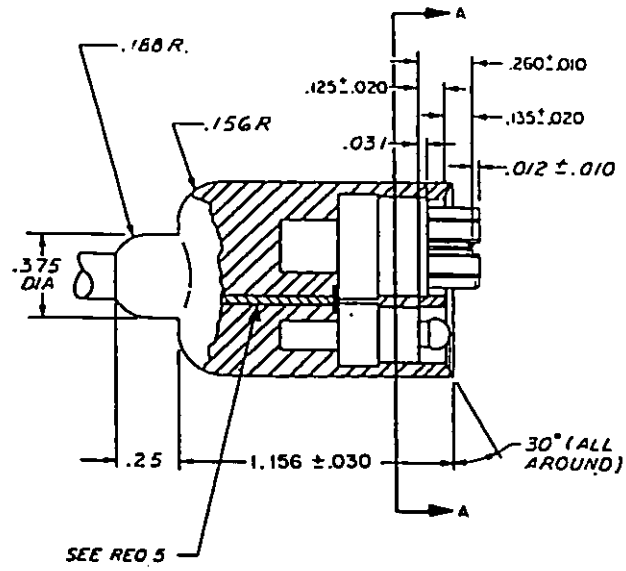

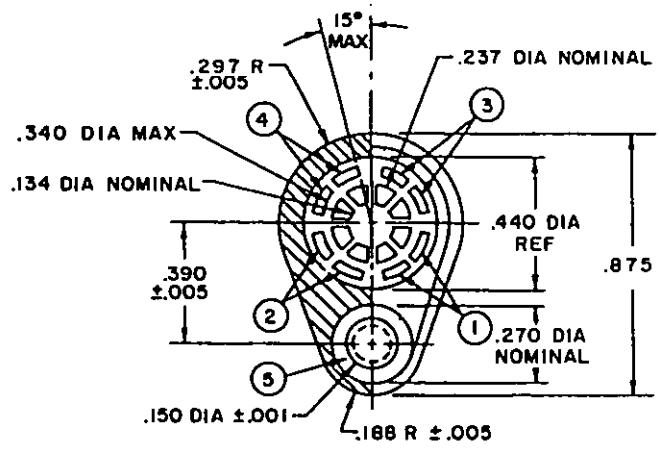

FRONT VIEW
SECTION A-A (PARTIAL)

NOTE:
(1) THRU (5) DENOTES WIRE DESIGNATION
FOR INTERFACE DIMENSIONS SEE REQUIREMENT 1.

FIGURE 2. Molded rubber connector slotted contact assembly P/N M22442/2-2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:22Z
Check the source to verify that this is the current version before use.

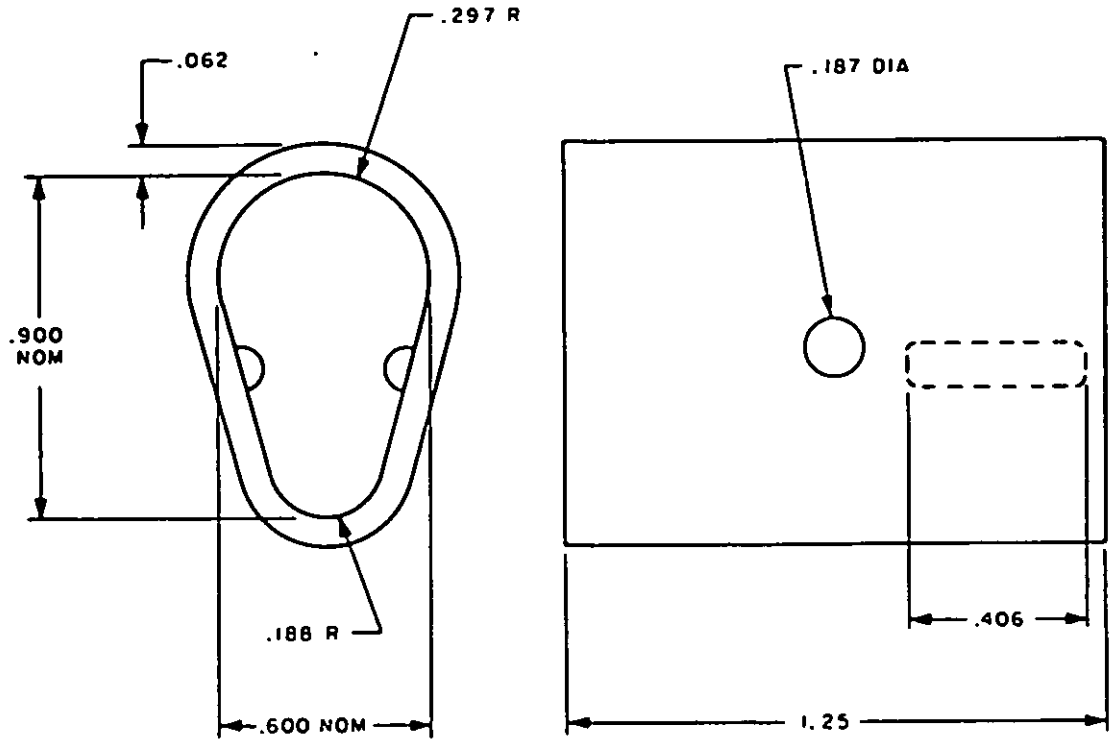


FIGURE 3. Sleeve P/N M22442/2-3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:22Z
Check the source to verify that this is the current version before use.

APPLICABLE DOCUMENTS:

L-P-410	Plastic, Polyamide (Nylon), Rigid, Rods, Tubes, Flats, Molded and Cast Parts
MIL-R-6855	Rubber, Synthetic, Sheets, Strips, Molded or Extruded Shapes

REQUIREMENTS:

1. The connectors shall be checked in accordance with Table I of the applicable detail specification sheet for interfacial dimensions with all the mechanical gauges specified in MIL-C-22442/25.

2. The contractor shall acquire and maintain mechanical gauges and gauge cases in accordance with MIL-C-22442/25.

3. The rubber covering shall be in accordance with MIL-R-6855, Class II, Type A, GR 60.

B. 4. The force required to unmate the connector in an axial direction when mated with a M22442/2-2 connector shall be 15 ± 2 pounds. In any direction other than axial, the force shall be 4 pounds minimum and 10 pounds maximum.

B 5. The stay cord shall be securely anchored to the molded connector. The anchoring method is optional.

6. Sleeve P/N M22442/2-3 must be slip fit on connectors M22442/2-1 and M22442/2-2.

7. Sleeve P/N M22442/2-3 shall be made of plastic polyamide (nylon) in accordance with L-P-410.

B 8. The durability test of 4.6.15 shall be run by unmating the connectors in a radial direction 100 times.

NOTES:

1. Dimensions are in inches unless otherwise specified. Tolerances ±.015 unless otherwise specified.

2. The maximum and minimum height of the contact's metal to metal (.260 ±.010) may be checked using a depth micrometer with a modified blade.

3. The maximum and minimum height of the metal contact to the rubber base (.135 ±.020) may be checked using a depth micrometer with a modified blade.

Preparing Activity:
Navy - AS
Project No. 5995-N120-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:22Z
Check the source to verify that this is the current version before use.