INCH-POUND

MIL-C-22442/2C(AS)
18 February 1992
SUPERSEDING
MIL-C-22442/2B(AS)
2 September 1988


MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO), MOLDED RUBBER CONNECTOR (QUICK DISCONNECT)

Inactive for new design after 2 September 1988.
For new design use MIL-P-642/14 or MIL-J-641/20.

This specification is approved for use by the Naval Air Systems Command, Department of Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-22442.

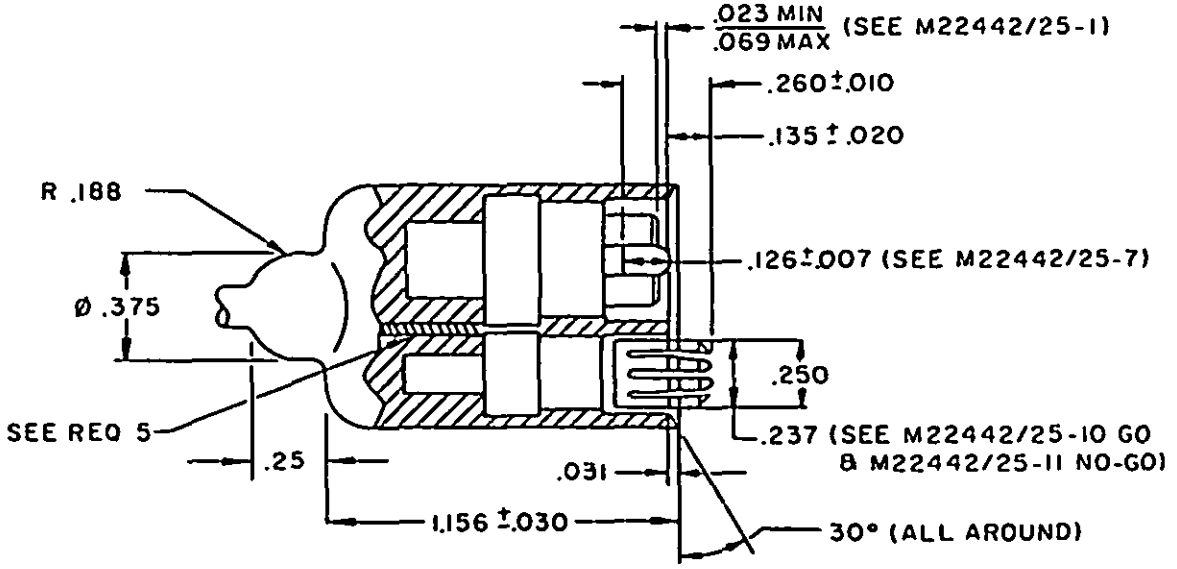


(C) FIGURE 1. Molded rubber connector notched contact assembly P/N M22442/2-1.

FSC 5995

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:22Z
Check the source to verify that this is the current version before use.

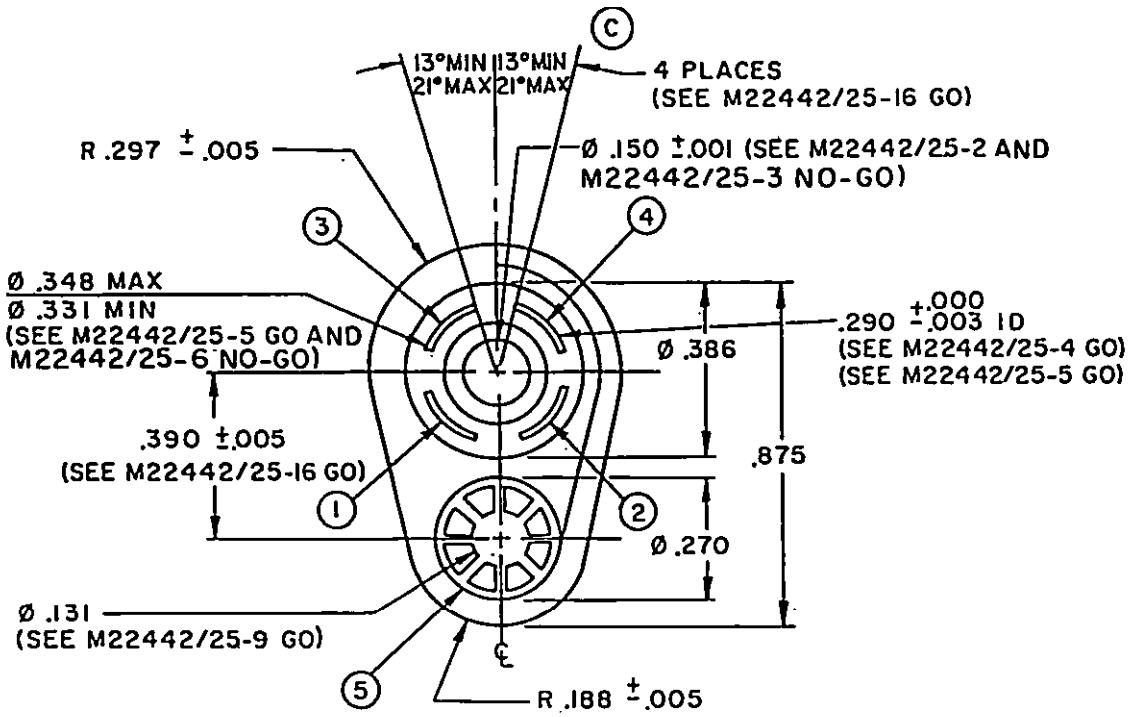



FRONT VIEW

NOTE: 1 THRU 5 DENOTES WIRE DESIGNATION.
FOR INTERFACE DIMENSIONS SEE REQUIREMENT 1.

(C) FIGURE 1. Molded rubber connector notched contact assembly P/N M22442/2-1 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:22Z
Check the source to verify that this is the current version before use.

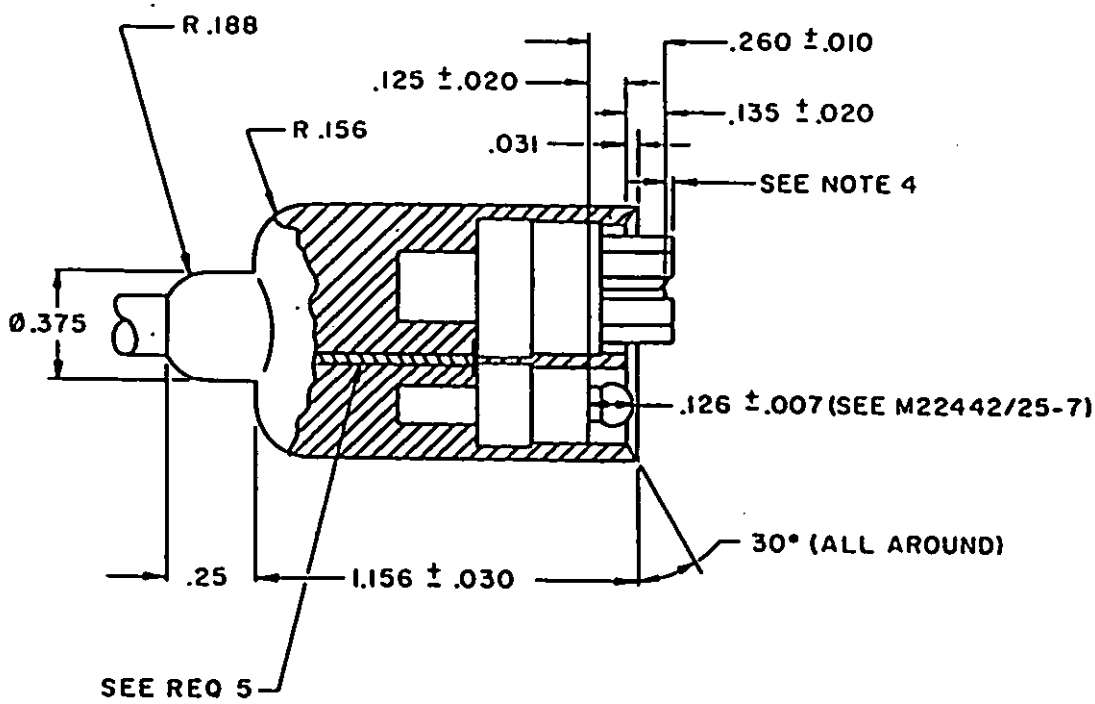

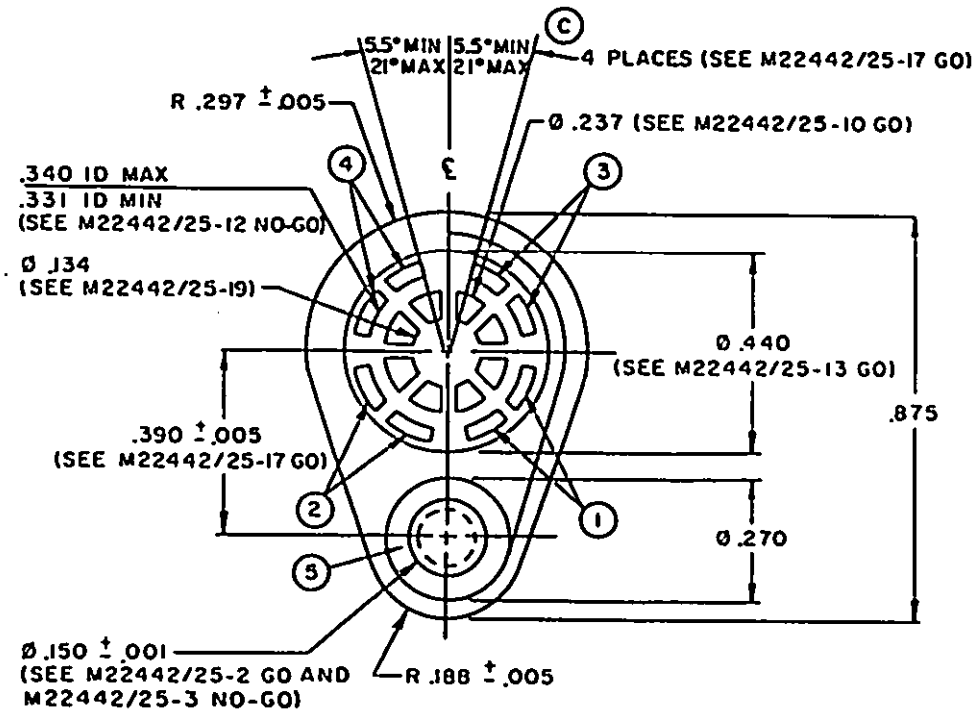

FRONT VIEW

NOTE: 1 THRU 5 DENOTES WIRE DESIGNATION.
FOR INTERFACE DIMENSIONS SEE REQUIREMENT 1.

(C) FIGURE 2. Molded rubber connector slotted contact assembly P/N M22442/2-2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:22Z
Check the source to verify that this is the current version before use.

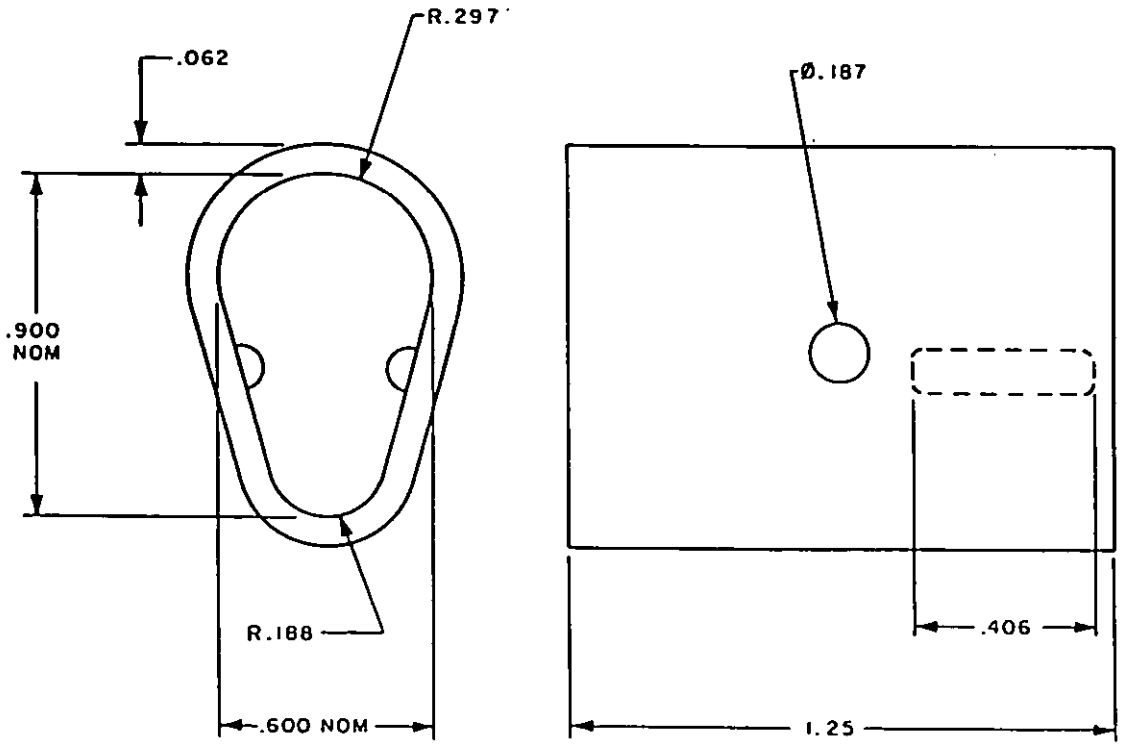


FIGURE 3. Sleeve P/N M22442/2-3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:22Z
Check the source to verify that this is the current version before use.

APPLICABLE DOCUMENTS:

L-P-410	Plastic, Polyamide (Nylon), Rigid; Rods, Tubes, Flats, Molded and Cast Parts

REQUIREMENTS:

1. The connectors shall be checked in accordance with table I of the applicable detail specification sheet for interfacial dimensions with all the mechanical gauges specified in MIL-C-22442/25.

2. The contractor shall acquire and maintain mechanical gauges and gauge cases in accordance with MIL-C-22442/25.

(C) 3. The rubber covering shall be made of a material which will meet the requirements imposed on the cable assembly to which it is fastened.

4. The force required to unmate the connector in an axial direction when mated with a M22442/2-2 connector shall be 15 + 2 pounds. In any direction other than axial, the force shall be 4 pounds minimum and 10 pounds maximum.

5. The stay cord shall be securely anchored to the molded connector. The anchoring method is optional.

6. Sleeve P/N M22442/2-3 must be slip fit on connectors M22442/2-1 and M22442/2-2.

7. Sleeve P/N M22442/2-3 shall be made of plastic polyamide (nylon) in accordance with L-P-410.

(C) 8. Following the completion of the durability test (see 4.6.15), the connector shall maintain electrical continuity with the mating connector.

NOTES:

1. Dimensions are in inches unless otherwise specified. Tolerances ±.015 unless otherwise specified.

2. The maximum and minimum height of the contact's metal to metal (.260 ±.010) may be checked using a depth micrometer with a modified blade.

3. The maximum and minimum height of the metal contact to the rubber base (.135 +.020) may be checked using a depth micrometer with a modified blade.

(C) 4. Dimension between inner and outer contacts may vary between +.007 and -.012 from edge of outer contact.

Preparing activity:
Navy - AS

(Project 5995-N135-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:22Z
Check the source to verify that this is the current version before use.