INCH-POUND
MIL-DTL-22442E
5 January 1998
SUPERSEDING
MIL-C-22442D
29 July 1988

DETAIL SPECIFICATION

CABLE ASSEMBLIES, AIRCRAFT AUDIO, GENERAL SPECIFICATION FOR

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the general requirements for complete cable assemblies, with molded or attached plugs including any required built-in electronics, used in aircraft intracommunications and intercommunications systems. It covers cord sets for personal gear such as microphones, headsets, earphones, hand sets and similar equipment, and cable assemblies for contact with ground crew personnel.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Naval Air Warfare Center Aircraft Division, Code 414100B120-3, Highway 547, Lakehurst, NJ 08733-5100, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5995
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:21Z
Check the source to verify that this is the current version before use.

2.2 Government documents.

* 2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto cited in the solicitation (see 6.2).

SPECIFICATIONS

DEPARTMENT OF DEFENSE

MIL-J-641/22	-	Jack, Telephone U-385/U
MIL-P-642/14	-	Plug, Telephone (Type U-384/U) 5 Conductor Single
MIL-C-26482	-	Connectors, Electrical (Circular, Miniature, Quick Disconnect, Environmental Resisting), Receptacles and Plugs, General Specification for
MIL-C-39029	-	Contacts, Electrical Connector, General Specification for

(See supplement 1 for list of specification sheets.)

STANDARDS

FEDERAL

FED-STD-228	-	Cable and Wire, Insulated, Methods of Testing

DEPARTMENT OF DEFENSE

MIL-STD-202	-	Electronic and Electrical Components, Parts, Test Methods for
MIL-STD-810	-	Environmental Test Methods and Engineering Guidelines
MIL-STD-889	-	Dissimilar Metals

HANDBOOKS

DEPARTMENT OF DEFENSE

MIL-HDBK-454	-	Electronic Equipment, General Guidelines for

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:21Z
Check the source to verify that this is the current version before use.

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

SD-6 - Provisions Governing Qualification

(Copies of the SD-6 are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

* 2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitations (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM-D1149 - Standard Test Method for Rubber Deterioration -Surface Ozone Cracking in a chamber (DoD adopted)

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

UNDERWRITERS LABORATORY, INC. (UL)

UL-1581 - UL Standard for Safety Electrical Wires, Cables, and Flexible (DoD adopted)

(Application for copies should be addressed to the Under writers Laboratory, Inc., Publications Stock, 333 Pfingsten Road, North Brook, IL 60062.)

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI-J-STD-001 - Requirements for Soldering Electrical and Electronic Assemblies

(Application for copies should be addressed to the American National Standards Institute, 11 West 42nd Street, New York, NY 10036.)

SAE INTERNATIONAL

SAE-AS4461 - Assembly and Soldering Criteria for High Quality/High Reliability Soldered Wire and Cable Termination in Aerospace Vehicles

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:21Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to SAE International, 400 Commonwealth Dr., Warrendale, PA 15096.)

THE INSTITUTE FOR INTERCONNECTION AND PACKAGING ELECTRONICS CIRCUITS (IPC)

IPC-D-275 - Design Standard for Rigid Printed Boards and Rigid Printed Board Assemblies (DoD adopted)

(Application for copies should be addressed to The Institute for Interconnection and Packaging Electronics Circuits, 7380 North Lincoln Avenue, Lincolnwood, IL 60646-1776.)

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated specifications or specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Specification sheets. The individual item requirements shall be as specified herein and in accordance with the applicable specification sheet. In the event of any conflict between the requirements of this specification and the specification sheet, the latter shall govern.

* 3.2 Part or identifying numbers (PIN). Part numbers for cable assemblies furnished under this specification shall be constructed as shown in 6.6.

3.3 Qualification. Cable assemblies furnished under this specification shall be products that are authorized by the qualifying activity for listing on the applicable qualified products list before contract award (see 4.3 and 6.3).

3.3.1 Qualification of individual components. Qualification of individual components is not required as noted on individual specifications sheets. However the Government reserves the right to require certification of compliance of the same. Production items shall be identical in all respects to those submitted to the Government for approval, unless otherwise approved by the Government in writing.

3.3.2 Qualification by similarity. Cable assemblies furnished under this specification may be qualified by similarity as shown by the examples in MIL-DTL-22442/6.

3.4 Design and construction.

* 3.4.1 Connectors. The connectors shall be as specified in the detailed specification sheets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:21Z
Check the source to verify that this is the current version before use.

* 3.4.1.1 Contacts. Contacts used in MIL-C-26482 or equivalent type circular connectors approved by the qualifying activity shall conform to MIL-C-39029. Other contacts shall be as specified in the specification sheet.

3.4.2 Connections. Connections shall be as specified in the specification sheet.

* 3.4.3 Terminations. Terminations shall conform as specified in specification sheet.

* 3.4.4 Cable/cord. Cable/cord shall be as specified in the specification sheet. Cable sizing, configuration, and number of conductors shall also be as specified in the specification sheet.

* 3.4.4.1 Molded materials. Molded materials shall be made from similar materials as the cordage jacketing materials, and shall provide a bond that will meet the requirements of 3.5.5, 3.5.6, 3.5.8, and 3.5.10 with the cable jacket.

3.4.5 Extended length. Extended length of the cable assembly shall be as specified in the specification sheet.

3.4.6 Weight. The maximum weight of the cable assembly shall be as specified in the specification sheet.

3.4.7 Switch assemblies. Each switch assembly housing shall be built in accordance with the specification sheet and may contain a microphone amplifier, microphone keying switch, earphone impedance matching transformer, and terminal block, or any combination thereof, as specified in the specification sheet.

3.4.8 Switches. Switches shall be as specified in the specification sheet.

3.4.9 Terminal blocks. Terminal blocks shall be as specified in the specification sheet.

* 3.4.10 Other non-ferrous metals and alloys. The plating or finish used for each individual part shall provide a good appearance, corrosion and deterioration resistance for that part. Various problems such as soldering, fitting, assembly, reaction with adjacent parts and the like, shall be considered in the selection of the plating or finish.

* 3.4.11 Dissimilar metals. Selection and protection of dissimilar metal combinations shall be in accordance with MIL-STD-889. The use of dissimilar metals shall be limited to applications where similar metals cannot be used due to peculiar design requirements.

3.4.12 Interchangeability. Interchangeability shall exist between all units and replaceable assemblies, subassemblies, and parts for all equipment delivered on the contract using MIL-HDBK- 454, Guideline 7 as guidance. Production items shall be identical in all respects to those submitted to the Government for approval, unless otherwise approved by the Government in writing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:21Z
Check the source to verify that this is the current version before use.

3.4.13 Marking. Cable assemblies shall be marked on plastic bands, or heat shrinkable tubing, and shall fit snugly around the cable circumference. More than one identification band may be used. Heat shrinkable tubing when used shall not be used as support or as a part of the cable. The cable assemblies shall be marked with the following information.

Information Required	Example
Contract Number	****
Military P/N (Type Designator)	M22442/XX-X (CX-XXXX)
Contractor and Government Entities (Cage)	****
NSN	NSN 5995-***

3.4.14 Color. The cable shall be black.

3.4.15 Clothing clip. The clothing clip shall be as specified in the specification sheet.

* 3.4.16 Insulating and impregnating compounds. All insulating and impregnating compounds including varnishes, waxes, shall meet in every respect the requirements for each particular application as specified, under all service conditions, including test conditions outlined in section 4 of this specification, the compound shall preserve the dielectric strength of the insulation to which it is applied. A compound shall not, either in the state of its original application or as a result of aging under severe service conditions, show any injurious effect upon the insulation it is designed to protect, and shall not cause corrosion or deterioration of adjacent metal or plastic parts.

* 3.4.17 Cementing compounds. Any cementing compound used in the construction of the cable assembly shall withstand all service conditions including test conditions outlined in section 4 of this specification without evidence of loosening or otherwise affecting the performance requirements of the cable assembly.

* 3.4.18 Assembly and Soldering. Cable assemblies shall be assembled in accordance with SAE-AS4461 with the exception of soldering which shall be in accordance with ANSI- J-STD-001, Class 3. Printed wiring boards shall be in accordance with IPC-D-275.

3.5 Performance. The cable assembly shall meet the following performance requirements when applicable.

3.5.1 Continuity. Each conductor shall be continuous in the assembly through the terminations of the conductors, where the design calls for a continuous line. Testing shall be in accordance with 4.5.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:21Z
Check the source to verify that this is the current version before use.

3.5.2 Dielectric withstanding voltage. Unless otherwise specified in the specification sheet, the cable assemblies shall withstand a dielectric withstanding voltage as specified in the applicable cordage specification for a minimum of 30 seconds when tested in accordance with 4.5.4.

3.5.3 Gauging. For connector terminated cable assemblies, contacts and interfacial dimensions shall not be changed by the assembly procedure to prevent intermating of connectors. Testing shall be in accordance with 4.5.5.

3.5.4 Pull and twist. The terminal components including metallic terminals, taper pins, connectors, terminal blocks, and molded bend reliefs (see 6.5) shall not part from the conductor at the specified loads in accordance with the applicable drawings or specification sheets. After twisting and pulling in accordance with 4.5.6, there shall be no more than 1/32 inch slippage of the cable jacket from the connector, nor separation of the bond on molded terminations, molded bend reliefs, and molded strain reliefs (see 6.5).

3.5.5 Bend relief flexibility (see 6.5). For flexible molded cable assemblies with bend reliefs, there shall be no electrical discontinuity, bond separation, or cracking between the insulation or bend relief and the cable jacket after being tested in accordance with 4.5.7.

3.5.6 Low temperature flexibility. For cable assemblies with molded or heat-shrunken components, the insulation of each conductor within a portion of the cable jacket containing a molded or potted splice, crotch, or other molded or potted section or heat-shrunken transition (see 6.5), shall be tested for low temperature flexibility. The condition of the test temperature shall be the lower limit of the cable operating temperature range. If not specified, the temperature shall be -40°C. After test, there shall be no visible cracks or other damage in the molded section or adjacent portion of the cable jacket, and the assembly shall meet the specified performance. Testing shall be in accordance with 4.5.8.

3.5.7 Durability. The cable connectors shall exhibit a contact resistance and maximum mating force or torque as specified in accordance with the applicable drawings or specifications sheets. After the cable assembly and connector have been subjected to the durability test in accordance with 4.5.9, connectors and cable assemblies shall not show signs of degradation of engagement or separation forces, wear of contact plating or coupling mechanisms when tested as specified herein or in the applicable drawings or specifications.

* 3.5.8 Ozone resistance. Cable assemblies shall be tested for ozone resistance in accordance with 4.5.10. At the completion of the exposure period, there shall be no evidence of cracking when examined under 7X magnification.

* 3.5.9 Jacket elongation. Cable assemblies shall be tested for jacket elongation. Testing shall be in accordance with 4.5.11. The test requirement shall be governed by the applicable cable jacketing specification for the section under test. The cable jacketing specification shall be as specified in the applicable MIL-DTL-22442 specification sheet. If no elongation requirements are given, the requirement shall be 175 percent minimum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:21Z
Check the source to verify that this is the current version before use.

3.5.10 Durometer hardness. The molded assemblies shall have a durometer hardness of 60 ±10 Shore A units for rubber and 80 ± 10 shore A units for polyurethane when tested in accordance with 4.5.12. This shall apply to all molded terminations and other molded sections.

3.5.11 Material reversion (polyurethane and polyacrylic compounds only). Molding, potting, insulating, or jacketing compounds shall not crack, run, drip, or deform, and the hardness after conditioning shall be no more than 10 points below the durometer hardness Shore "A" measured by 3.5.l0; for polyurethane compounds cured with non-carcinogenic agents, the change shall be no more than 15 points below.

3.6 Environmental.

3.6.1 Temperature - altitude. Cable assemblies with electronic components shall meet the performance requirements of the applicable specification sheet during and after the temperature-altitude test of 4.6.1. The cable assembly shall be operational when specified by MIL-STD-810. The steps performed shall be in the sequence specified in 4.6.1.

3.6.2 Salt fog. After completion of the salt fog test of 4.6.2, the cable assemblies shall show no evidence of corrosion and shall meet all operational requirements at the end of the 48 hour drying period specified in MIL-STD-810, Method 509.3, Procedure I.

3.6.3 Flammability. The cable assembly shall pass the flammability tests as specified in 4.6.3.

3.6.4 Vibration. All cable assemblies which contain connectors, which in use, are hard-mounted to the aircraft, shall meet the requirements of 3.5.1 while tested in accordance with 4.6.4. Only the connector and a section of its associated cable need be tested.

3.6.5 Environmental service conditions. Each cable assembly shall meet the specified performance requirements of the applicable specification sheet and continuity requirements of 3.5.1, within one hour of being subjected to the following environmental tests of 4.6:

a. Humidity (see 4.6.5)

b. Thermal shock (see 4.6.6)

The cable jacketing shall show no signs of cracking after completion of the thermal shock test when examined under 7X magnification.

3.7 Workmanship. The cables shall be uniform in quality and shall be free from defects. Cleaning shall be in accordance with MIL-HDBK-454, Guideline 9. There shall be no evidence of loose electrical connectors, poor or improper molding or fabrication, damaged or improperly assembled contacts, peeling; flaking or chipping of plating or finish, mechanical damage due to testing environment, nicks or burrs of metal parts of surfaces, improper or incorrect marking; or improper tinning of solder cups, terminals, pins, or contacts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:21Z
Check the source to verify that this is the current version before use.

4. VERIFICATION

4.1 The text of this paragraph has been deleted. The number has been retained to keep the numbering sequence correct.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.3).

b. Quality conformance inspection (see 4.4).

4.3 Qualification inspection. Qualification inspection shall be performed in accordance with the provisions of SD-6. The qualification inspection shall consist of all Group I tests specified in table I of the specification sheet for each cable assembly. The qualification inspection sample shall consist of fifteen units of each cable assembly for which qualification is desired. At least two of the fifteen units shall be considered control samples, and only Group IA tests shall be performed on these units until the event of a failure. Group IA inspections shall be performed on each of the fifteen sample items. At least two samples shall be submitted to each of the Group I (B, C, and D) inspections. In the event of a single failure, one of the control samples shall be submitted to the failed test sequence. If a second failure occurs, qualification shall be denied.

* 4.3.1 Qualification samples. Items for qualification must be separately packaged and forwarded to the activity responsible for qualification as designated in the letter of authorization. The sample shall in all respects be representative of the manufacturer's production item. Each of the items shall be subjected to the applicable inspections specified in Group I of Table I of the specification sheet. Samples shall be marked in accordance with 3.4.13 except the items shall also be marked (Qualification Samples) and shall include the applicable specification number, and shall reference the letter authorizing the tests.

* 4.3.2 Acceptance of final product. Acceptance or approval of material during course of manufacture shall in no case be construed as a guarantee of the acceptance of the finished product. Acceptance of the finished product shall be upon a lot basis after satisfactory completion of all required tests. Acceptance tests shall consist of Group II and Group III tests in table I of the specification sheet for the specified cable assembly.

4.4 Quality conformance inspection. Quality conformance inspection for this specification shall consist of the tests of Group II and Group III of the specification sheet unless otherwise specified in the contract or purchase order. Group II quality conformance tests shall be performed on each individual unit prior to acceptance. Units failing the quality conformance test may be discarded or reworked to correct defects and resubmitted for acceptance.

* 4.4.1 Production lot sampling. All cable assemblies submitted for inspection as a production lot shall be manufactured using identical components, raw materials, and processes. All cordage

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:21Z
Check the source to verify that this is the current version before use.

and molding material shall be from the same incoming lots. All other components of identical type designation shall be procured from the same manufacturer for all cable assemblies in the production lot (the manufacturer shall not change cordage manufacturers, or connector manufacturers, etc., during a production lot). All Group III tests specified in table I of the specification sheet shall be performed on sample units pulled from the production lot which has already passed the Group II inspection. The sample units shall be chosen at random under the supervision of the cognizant government inspector. Sample sizes for Group III sample testing as specified in table I of the specification sheet shall be in accordance with table I of the general specification. Contracts for less than 10 cables shall be subjected to 100 percent inspection of Group A tests. Distribution of test samples between Groups B and C shall be in accordance with the test plan prepared by the contractor and approved by the cognizant government inspector.

TABLE I. Sample plan for Group III sample testing.

Number of Cable Assemblies in Contract	Total Number of Cable Assemblies to be Tested
10 through 280	3
281 through 500	6
501 through 1000	9
1001 through 2000	12
2001 through 5000	15
5001 or more	18

4.4.1.1 Disposition of samples. Samples subjected to Group B tests may be shipped under the contract. Samples subjected to Group C tests shall not be shipped under the contract.

4.4.1.2 Noncompliance. No failures shall be allowed in Group III inspection. If a sample unit fails to pass Group III inspection, the supplier shall take corrective action on the material or process or both, as warranted, and on all units of production which can be corrected and which were manufactured under essentially the same conditions, with essentially the same materials, processes, and which are considered subject to the same failure. Acceptance of the product shall be discontinued until corrective action has been taken. Group III inspection shall be repeated on additional sample units (all inspections or the inspection that the original sample failed, at the option of the Government). Group II inspection may be reinstituted, however, final acceptance shall be withheld until the Group III reinspection has shown that the corrective action was successful. In the event of a failure after reinspection, information concerning the failure and the corrective action taken shall be furnished to the qualifying activity. Contractors not having laboratory testing facilities satisfactory to the Government for sampling tests shall engage the services of a commercial testing laboratory acceptable to the Naval Air Warfare Center Aircraft Division (NAWCAD), Indianapolis, IN 46219-2189.

4.5 Methods of Inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:21Z
Check the source to verify that this is the current version before use.

4.5.1 Test conditions. Unless otherwise specified herein or in the equipment specification, measurements and tests shall be made at ambient conditions.

4.5.2 Visual and mechanical examinations. The cable assemblies shall be examined to verify that the materials, design, construction, physical dimensions, marking, and workmanship are in accordance with the applicable requirements.

* 4.5.2.1 Soldering. All soldering shall meet the general purpose soldering requirements of ANSI/J-STD-001, Class 3.

4.5.3 Continuity. dc resistance checks shall be made in accordance with the specification sheet. This shall include continuity across wire terminal junctions. All conductors terminating in active components shall be tested before the active component is included in the circuit.

4.5.4 Dielectric withstanding voltage. Dielectric strength shall be performed in accordance with MIL-STD-202 Method 301. The potential and time duration shall be as specified in the applicable cordage specification. The potential shall be applied between each conductor and the remaining conductors connected together and to the shield, and metallic shells, if present. All conductors terminating in active components shall be tested before the active component is included in the circuit.

4.5.5 Gauging. Contact locations and interfacial dimensions of the connector as specified in the applicable connector specification or drawing, shall be measured after assembling connector to cable. Certified test data from the connector manufacturer may be used in lieu of final assembly gauging. It is mandatory that the cable manufacturer perform gauging on the molded rubber connector (M22442/2-1 and M22442/2-2).

4.5.6 Pull and twist test. The cable assembly pull test shall consist of the twist test (4.5.6.1) followed by the pull test (4.5.6.2).

4.5.6.1 Twist test. The twist test shall be applicable to all ends of the cable assembly that are terminated with a connector only. Each connector shall be secured in a holding device in such a way that it cannot rotate. The twist shall be applied about the axis of the cable to cause a point on the cable three inches from the connector to twist 180 degrees from the starting position and be held there for 30 seconds. The cable shall then be twisted in the opposite direction such that the point on the cable has twisted 180 degrees past the original starting position, and be held there for 30 seconds.

4.5.6.2 Pull test. The pull test shall be applied to all terminals, connectors, switch assemblies, and taper pins. The component of the cable assembly to be tested shall be secured in a stationary holding device and the cable gripped six to twelve inches from the component of the cable assembly under test. The grips shall not slip or damage the cable during the test. The static force shall be applied for 30 seconds with the force values specified as follows.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:21Z
Check the source to verify that this is the current version before use.

4.5.6.2.1 Terminals. Terminals soldered to circular conductors shall be subjected to 5 pounds minimum pull. Terminals crimped to circular conductors shall be subjected to 3 pounds minimum pull. Contacts as part of the connector shall not be considered a terminal.

4.5.6.2.2 Taper-pins. Taper-pins inserted into a connector shall be subjected to a pull of 3 pounds minimum at the taper-pin connector connection.

* 4.5.6.2.3 Connectors. A pull force of 20 ± 2 pounds shall be applied. If the connector is potted or molded 30 ± 2 pounds shall be applied.

4.5.6.2.4 Switch assembly. The switch assembly shall be securely mounted and a 20 ±2 lb. force shall be applied to the connecting cables. The cable assembly shall meet the requirements of 3.5.4.

4.5.7 Bend relief flexibility. Each bend-relief in the cable assembly shall be manually subjected to 30 continuous flexure cycles, at room temperature, through a 180 degree arc, at approximately 30 cycles per minute. Each bend relief shall be held in a mechanical device so that the portion of the cable entering the bend relief flexes when the cable is flexed. The bend-relief is free to flex with the cable in one direction through 90 degrees from the axially in-line starting position, back to the starting position, then through 90 degrees in the opposite direction, and return to the starting position. The flexing procedure shall be repeated for 30 cycles in a plane 90 degrees axially to the plane of initial flexing.

4.5.8 Low temperature flexibility. The cable assembly or portion thereof containing the molded section (see 6.5 g) or heat-shrunken transition (see 6.5 e) shall be aged in a circulating air oven for a minimum of 48 hours at 160 ±2°F. The cable assembly shall then be conditioned for a minimum of 8 hours at the temperature specified in 3.5.6. This temperature shall be continuously recorded during conditioning and testing. Each crotch or molded section (see 6.5 d & f) shall be held in a mechanical device so that the portion of the cable entering the molded section flexes when the cable is flexed. The cable shall be flexed mechanically. Any part of a mechanical device which will be in contact with the test specimen shall be cold conditioned. At the end of the conditioning period and while at the conditioning temperature, the cable shall be flexed rapidly for 30 cycles through a 180-degree arc (± 90 degrees from 0 degrees). The flexing procedure shall be repeated in a plane 90 degrees to the plane of initial flexing. At the conclusion of the test, the specimen shall be examined visually at room temperature under 3X magnification and electrically tested for conductor continuity.

4.5.9 Durability. Unless otherwise specified in the connector specification sheet, all connectors of the cable assembly shall be mated and unmated 100 times. MIL-C-26482 or equivalent type connectors (as approved by the qualifying activity) shall be mated manually or automatically at a rate not to exceed 12 cycles per minute, and shall be torqued to the value specified in the applicable MIL-C-26482 specification sheet. Quick disconnect connectors shall be unmated by breaking the connectors in a direction perpendicular to the axial plane and major

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:21Z
Check the source to verify that this is the current version before use.

axis. All other connector types shall be mated and unmated in the axial direction, at a rate not to exceed 12 cycles per minute.

4.5.10 Ozone resistance. The cable assembly shall be tested for ozone resistance in accordance with ASTM-D1149 with the following test conditions: Test time shall be 168 ±1 hour, ozone concentration shall be 50 parts per 100,000,000, and the chamber temperature shall be 100 ± 5°F. Any bend relief or a cordage intersecting a molded junction shall be bent at an angle of 90 degrees over the mandrel while in the chamber. In addition, the cable jacket shall be wrapped around the mandrel. The mandrel radius shall be based on the cross sectional area of the bend relief or a cordage intersecting a molded junction.

Specimen Cross Section	Mandrel Radius
Up to 0.500	4 X Cross Section
0.501 to 0.750	5 X Cross Section
0.751 to 1.250	6 X Cross Section

4.5.11 Jacket elongation. The elongation test shall be in accordance with FED-STD-228, Method 3031.

* 4.5.12 Durometer hardness. Durometer hardness shall be measured by use of a durometer hardness gauge acceptable to the government inspector. The tolerance shall be ± 10 Shore A units. Tests may be performed on molded slabs .250 inch thick.

4.5.13 Material reversion. The molding, potting, and insulating material shall be tested using specimens approximately 4 inches square by 1/8 inch thick, the specimens for jacketing material shall be 6.5 inches long for a Durometer Hardness Shore A. Then, they shall be placed in a chamber maintained at 100 ±l°C and 95 ± 2 percent relative humidity without condensation for 28 days. The cable assemblies shall be arranged so they do not come in contact with each other nor with the chamber walls or floor. After conditioning, the cable assemblies shall meet the requirements of 3.5.11.

4.6 Environmental service condition tests. The cable assemblies shall meet all specified performance requirements when tested in accordance with the following procedures.

4.6.1 Temperature-altitude (only applicable to assemblies with active components or transformers). The cable assembly shall be tested in accordance with MIL-STD-810, Method 520.1, Procedure III, except that humidity and vibration environments shall be deleted. Delete steps 2 through 7 and substitute the following.

Step 2. With the cable assembly nonoperating, adjust the chamber test conditions to -62°C and ambient pressure. The temperature shall be stabilized and maintained for at least two hours.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:21Z
Check the source to verify that this is the current version before use.

Step 3. With the cable assembly nonoperating, adjust the chamber temperature to -54°C and the altitude to 50,000 feet.

Step 4. With the cable assembly nonoperating, adjust the chamber test conditions to -10°C and ambient pressure. After the temperature has stabilized, the chamber door shall be opened and the frost permitted to form on the cable assembly. The door shall remain open long enough for the frost to melt, but not long enough to allow the moisture to evaporate.

Step 5. With the cable assembly nonoperating, adjust the chamber test conditions to +85 ° C and ambient pressure. The chamber temperature shall be stabilized and maintained for at least 16 hours.

4.6.2 Salt fog. The cable assembly shall be tested in accordance with MIL-STD-810, Method 509.3, Procedure I.

* 4.6.3 Flammability. The cable assembly shall be tested in accordance with the vertical flame test of UL-158l.


4.6.4 Vibration. The cable assembly shall be tested in accordance with MIL-STD-810, Method 514.4, Category V, Procedure I.

4.6.4.1 Vibration fixtures. Vibration fixtures, if used, shall be designed to transmit the required vibration to the test specimen with minimum attenuation, amplification, or distortion. Provisions shall be made for attachment of monitor transducers as necessary to maintain vibration tolerances within the limits specified in MIL-STD-810, Method 514.4, Category V, Procedure I. Transducers shall be located as close to the test item mounting locations as possible. Any structural resonance in the test fixture, if within 20 percent of a resonant frequency, shall be adjusted such that vibration amplitudes at all mounting points are within ±25 percent of the arithmetic average of the amplitudes at all these points. This average shall be used to establish the test level.

4.6.4.2 Functional vibration. Functional vibration testing of the cable assembly in accordance with figure 1 shall be performed for each of the three orthogonal axes both prior to and following the endurance vibration test. The cable assembly shall be continuity tested (see 4.5.3) during functional vibration testing and shall meet all requirements of the specification during and after both portions of the functional vibration test.

4.6.4.3 Endurance vibration. Endurance vibration testing shall consist of random vibration for each of the three orthogonal axes in accordance with figure 1. The cable assembly shall meet all performance requirements of this specification following the test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:21Z
Check the source to verify that this is the current version before use.

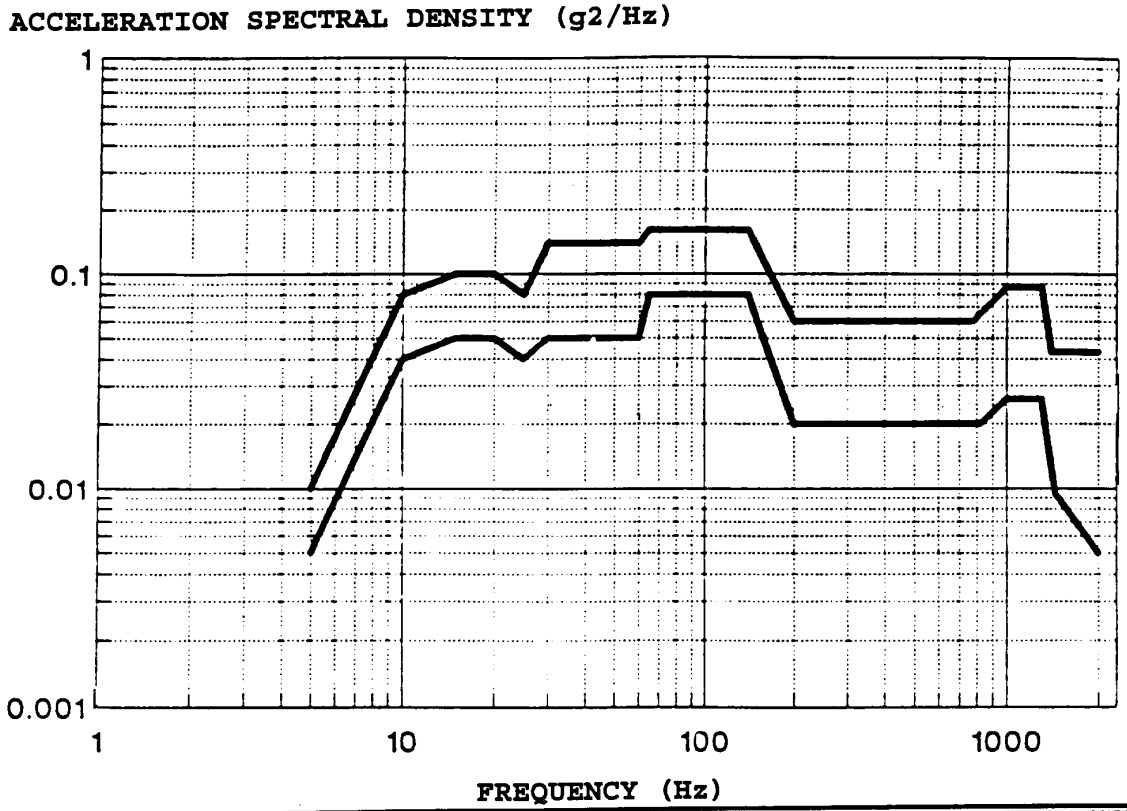

ONE HALF HOUR FUNCTIONAL LEVEL FOLLOWED BY ONE HOUR ENDURANCE LEVEL FOLLOWED BY ONE HALF HOUR FUNCTIONAL LEVEL IN EACH OF THREE MUTUALLY PERPENDICULAR AXIS					
Frequency (Hz)	Functional Level (g^2/Hz)	Endurance Level (g^2/Hz)	Frequency (Hz)	Functional Level (g^2/Hz)	Endurance Level (g^2/Hz)
5	.005	.01	140	.08	.16
10	.04	.08	200	.02	.06
15	.05	.10	775	- -	.06
20	.05	.10	825	.02	- -
25	.04	.08	1000	.026	.087
30	.05	.14	1300	.026	.087
60	.05	.14	1400	.01	.043
65	.08	.16	2000	.005	.043
FUNCTIONAL LEVEL 6.45 grms			ENDURANCE LEVEL 12.0 grms		

FIGURE 1. Functional and Endurance Vibration Levels

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:21Z
Check the source to verify that this is the current version before use.

4.6.5 Humidity. The unit shall be tested in accordance MIL- STD-810, Method 507.3, Procedure III, except as follows:

a. Step 2. The chamber temperature shall be 71 ° C.

b. Step 4. Maintain 85 percent or greater relative humidity and reduce internal chamber temperature in 16 hours to 28 ±10 ° C.

c. Step 5. Delete.

d Step 6. Repeat steps 2, 3, and 4 for a total of 10 cycles (not less than 240 hours).

e. Step 7. The cable assembly shall be operated within one hour following completion of the 10th cycle, and shall be tested to verify compliance with operational requirements.

4.6.6. Thermal shock. The non-operating cable assembly shall meet all operational requirements when subjected to thermal shock in accordance with MIL-STD-810, Method 503.3. For step 1, low temperature shall be -32° C. For step 2, high temperature shall be +71°C. The unit shall be cycled through three cycles of low and high temperature.

5. PACKAGING

* 5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

6.1 Intended use. The cable assemblies covered by this specification are intended for use in military aircraft. They are military unique because they have to connect existing military communication sets with the pilots earphones and microphones. There are no commercial equivalents or applications.

* 6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of the specification.

b. Applicable specification sheet number, title, and date (see 3.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:21Z
Check the source to verify that this is the current version before use.

c. Applicable specification sheet part number (see 3.1).

d. Issue of DoDISS to be cited in solicitation and if required the specific issue of individual documents referenced (see 2.2.1, 2.2.2, and 2.3).

e. Accessories, when they are desired to be furnished with the cable assemblies.

f. Number of cable assemblies required.

g. Packaging requirements (see 5.1).

h. Responsibility for inspection, if other than specified (see Section 4).

i. Special preparation for delivery requirements, if applicable (see section 5).

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Products List QPL No. 22442 whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or purchase orders for the products covered by this specification. The activity responsible for the QPL for MIL-DTL-22442 is the Naval Air Systems Command. The Naval Air Warfare Center, Aircraft Division , Indianapolis, IN, has been designated by the Naval Air Systems Command as agent for the establishment and maintenance of the QPL. Requests for information pertaining to and applications for qualification should be addressed to Commanding Officer, Naval Air Warfare Center Aircraft Division, Detachment Indianapolis, Code 11X348C, 6000 E. 21st Street, Indianapolis, IN 46219-2189.

6.3.1 Conformity to qualified sample. It is understood that cable assemblies supplied under contract should be identical in every respect to the qualification sample tested and found satisfactory, except for changes previously approved by the Government. Any unapproved changes from the qualification sample should constitute cause for rejection.

6.4 Rationale. The following historical documentation provides rationale for various requirements in this specification.

6.4.1 Test equipment. The test equipment described in 6.5.1.1 through 6.5.1.9 was selected to minimize testing problems encountered in measuring low level AC true RMS voltages and impedance. The low level AC microvoltages are several orders of magnitude lower in value than the thermally induced voltages. The low level impedances are equivalent to short circuits for some instruments and thereby create test induced measurement errors. Although automated test equipment is permitted and encouraged, be aware of test induced problems created by various

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:21Z
Check the source to verify that this is the current version before use.

analogue to digital conversion techniques. These test induced problems include the generation of nonexistent failures as well as the concealment of bonafide failures.

6.4.1.1 Multimeter.

a. Digital readout (4-1/2 digits)

b. Direct current (dc) and true RMS alternating current (ac)

c. Ranges: 10 microvolts to 15 volts RMS ac, 1 to 30 volts dc 1/

d. Accuracy: ±.5 percent

e. Input impedance: l megohm minimum

f. Inputs isolated from ground up to 30 volts

1/ NOTE: A calibrated lock-in amplifier with fixed incremental gain control may be used as a true RMS ac voltmeter provided all other requirements are met. A range of 10 millivolts to 15 volts is acceptable providing the attenuator maintains calibration under varying loads over the frequency range.

6.4.1.2 Signal or function generator.

a. Sine wave output

b. Frequency range: 100 to 6000 Hz minimum

c. Frequency accuracy and flatness at full output: ±2 percent

d. Harmonic distortion: Less than -65 dB (relative to fundamental) at full output for each frequency

e. dc offset: 1 Millville maximum

f. Voltage range: 1 Millville to 15 volts 2/

g. Output isolated from ground up to 30 volts

2/ NOTE: An amplifier may be used providing the function generator plus amplifier combination meets the above specifications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:21Z
Check the source to verify that this is the current version before use.

6.4.1.3 Spectrum analyzer (optional).

a. Frequency range: 100 to 6,000 Hz

b. Center frequency accuracy: ±.003 percent

c. Bandwidth: 1 Hz minimum to 500 Hz maximum

d. Measurement ranges: l microvolts to 15 volts linear, -120 dBV to +30 dBV log

e. Dynamic range: 70 dB

f. Voltage accuracy: ±0.5 dB

g. Input impedance: 1 megohm minimum

h. Inputs isolated from ground up to 30 volts

6.4.1.4 Distortion analyzer.

a. Frequency range: 100 to 6,000 Hz

b. Frequency accuracy: ±2 percent

c. Measurement range: 30 microvolts to 15 volts

d. Dynamic range: 70 dB

e. Voltage accuracy: ±2 percent

f. Input impedance: 0.1 megohm minimum

g. Fundamental rejection: 70 dB

h. Inputs isolated from ground up to 30 volts

6.4.1.5 Precision decade resistance box.

a. Frequency range: dc to 6,000 Hz

b. Resistance range: 2 to 15 ohms

c. Resistance increments: .1 ohms

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:21Z
Check the source to verify that this is the current version before use.

d. Accuracy: .5 percent

e. Resistance zero setting: 12 milliohms or less

f. Inductance: Less than .03 microhenries

g. Capacitance: Less than 8 picofarads

h. Low temperature and power coefficients

6.4.1.6 Lock-in amplifier (optional).

a. Frequency range: 100 to 6,000 Hz

b. Sensitivity: l microvolts to .5 volts

c. Output time constants: l millisecond to 10 seconds

d. Harmonic rejection: 55 dB

e. Normal output stability: 50 ppm

f. Gain accuracy: ±2 percent

g. Digital readout (3-1/2 digits)

h. Phasing: Automatic

i. Input impedance: l megohm or greater

j. Gain: Incremental or lockable after calibration

6.4.1.7 Oscilloscope.

a. Channel: Single

b. Bandwidth: 5 megahertz

c. Time base: 20 microsec/div to 1 millisec/div

d. Time base accuracy: ±3 percent

e. Coupling: ac and dc

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:21Z
Check the source to verify that this is the current version before use.

f. Source: Internal

g. Sweep mode: Auto trigger

h. Voltage base: 5 millivolts/div to 10 volts/div

i. Voltage base accuracy: ±3 percent

j. Input impedance: l megohm minimum

6.4.1.8 Ac Power Supply (optional).

a. Sine wave output

b. Frequency range: 100 to 6,000 Hz minimum

c. Frequency accuracy and flatness at full output: ±2 percent

d. Harmonic distortion: Less than -65 dB (relative to fundamental) at full output for each frequency

e. dc offset: 1 Millville maximum

f. Voltage range: l Millville to 15 volts

g. Output power: 220 VA with continuous volt-ampere output even under zero or unity power factor loads

h. Output isolated from ground up to 30 volts

6.4.1.9. AC ratio transformer standard.

a. Ratio: 1.111111 maximum, 0.0111111 minimum

b. Frequency range: 50 Hz to 10 KHz

c. Terminal linearity: 0.0001 percent (l ppm)

d. Resolution: 0.00001 percent steps

e. Maximum effective series impedance: R series 3.5 ohms, L series 100 microhenries

f. Output isolated from the input

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:21Z
Check the source to verify that this is the current version before use.

6.4.2 NBS tractability problems for calibrated AC true RMS voltmeters. The amplifier input voltage range of 50 to 500 microvolts RMS creates NBS tractability problems for calibrated AC true RMS voltmeters. Many Multimeter and true RMS voltmeters have unwarranted claims as to an AC true microvoltage measuring capability. On the lowest range scale, the instruments do not maintain the measurement nor calibration accuracy that is true at higher range scales. The instrument specification sheet itself is often unclear as to the actual accuracy when measuring a microvolts signal. The attenuation circuit of MIL-DTL-22442/1 figure 8 can resolve this problem without the use of an expensive AC true RMS microvoltmeter provided the following conditions are met:

a. The attenuation value is calibrated with NBS tractability at measurable voltage levels.

b. The impedances do match between the function generator and the amplifier under test.

c. The attenuation value is 80 dB and not 60 dB.

Note experimental evidence shows that a 60 dB attenuator does not provide a constant voltage independent of frequency or anticipated load impedances.

An AC ratio transformer standard (see 6.4.1.9), whose ratio is calibrated at a higher voltage level, can serve as an adequate transfer standard for verifying an instrument with AC true RMS microvoltage measuring capability and for calibrating the attenuator described in figure 8.

6.5 Definitions.

a. Bend relief. Any method used to alleviate stress on a section of cable due to bending of the cable. Example: Adding rubber at the cable/connector interface to reduce cable stress caused by movement of the connector.

b. Molded bend relief. A bend relief which is molded to the connector.

c. Molded strain relief. A strain relief which is molded to the cable assembly.

d. Crotch. The point at which one cable separates into two or more branches.

e. Heat shrunken transition. Placing a piece of heat shrinkable tubing around a portion of cable and shrinking in place, creating a heat shrunken transition. This is usually placed around an interface where the connector meets the cable.

f. Molded section. A molded section is created by encapsulating a portion of the cable jacket in rubber. This differs from the molded junction in that it is not limited to cable junctions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:21Z
Check the source to verify that this is the current version before use.

6.6 Part or identifying numbers (PIN). Part numbers for cable assemblies should be constructed as follows: M22442/X-Y with "X" being the specification sheet number and "Y" being any type cable assembly on a specific specification sheet.

6.7 Subject term (key word) listing.

Audio cable
Cord sets
Intercom cable

6.8 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review Activities:
Air Force - 11
Air Force - 99
DLA - CC

Preparing activity:
Navy - AS
(Project No. 5995-0128)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:21Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.
   NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-DTL-22442	2. DOCUMENT DATE (*YYMMDD*) 980105

3. DOCUMENT TITLE
CABLE ASSEMBLIES AIRCRAFT AUDIO GENERAL SPECIFICATION FOR

4. NATURE OF CHANGE (*Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.*)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (*Last, First, Middle Initial*)	b. ORGANIZATION	
c. ADDRESS (*Include Zip Code*)	d. TELEPHONE (*Include Area Code*) (1) Commercial: (2) DSN: (*If Applicable*)	7. DATE SUBMITTED (*YYMMDD*)

8. PREPARING ACTIVITY

a. NAME COMMANDER NAVAL AIR WARFARE CENTER AIRCRAFT DIVISION	b. TELEPHONE NUMBER (*Include Area Code*) (1) Commercial (732) 323-2628 (2) DSN
c. ADDRESS (*Include Zip Code*) CODE 414100B120-3 HIGHWAY 547 LAKEHURST, NJ 08733-5100	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office, 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 DSN 289-2340

DD Form 1426, OCT 89 *Previous editions are obsolete* 198/290

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:21Z
Check the source to verify that this is the current version before use.