MILITARY SPECIFICATION SHEET

(B) CABLE ASSEMBLY, RADIO FREQUENCY, (AIRCRAFT AUDIO), CONNECTOR (U-61/U)

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of specification MIL-C-22442(AS).

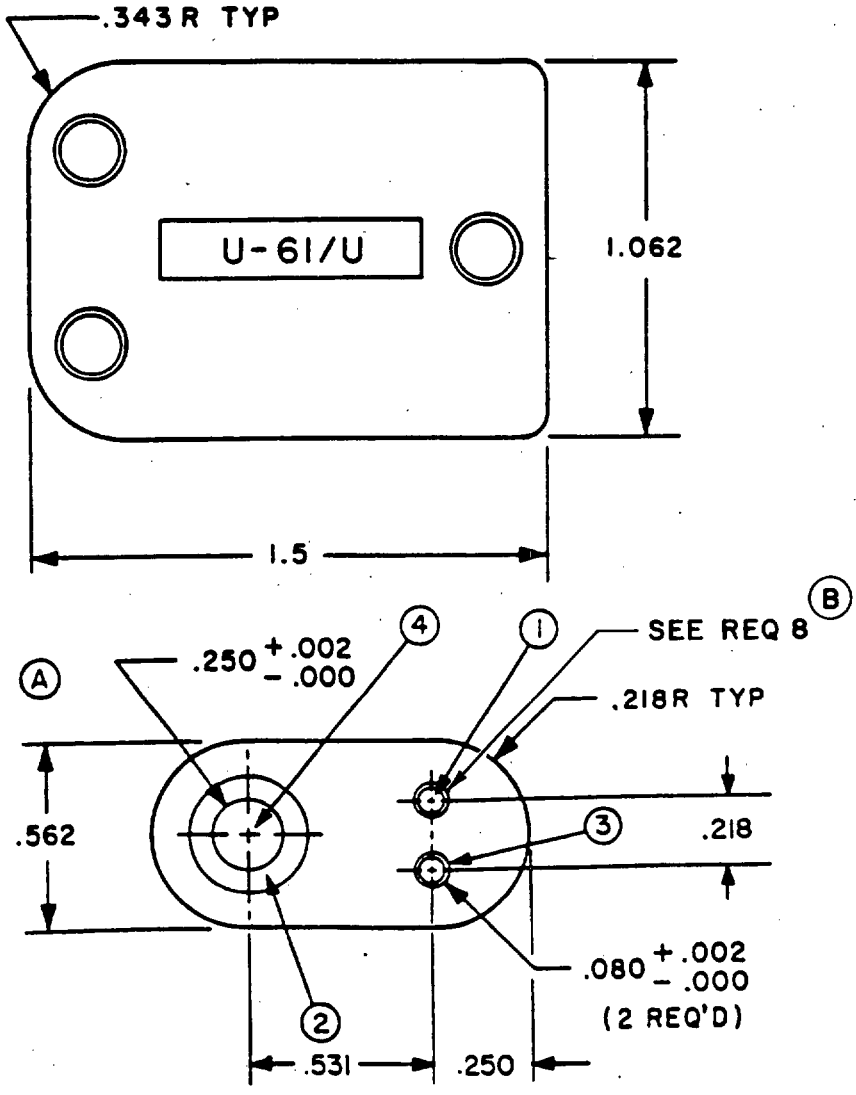


FIGURE 1. Connector P/N M22442/4-1 (U-61/U).

FSC 5995

AMSC N/A

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:23Z
Check the source to verify that this is the current version before use.

APPLICABLE DOCUMENTS

MIL-J-641 Jacks, Telephone, General Specification for

REQUIREMENTS:

1. M22442/4-1 (U-61/U) shall be capable of mating with M22442/5 connectors.

2. Sampling and testing procedures shall be in accordance with MIL-J-641.

3. The connector shall pass the following tests when tested in accordance with MIL-J-641.

   a. Visual and mechanical

   b. Dielectric strength

   c. Contact resistance

   d. Insertion and withdrawal force

   e. Spring life

   f. Salt spray

   g. Insulation resistance

   h. Moisture resistance

4. The insertion force shall be 8 lbs maximum. The withdrawal force shall be 6 $\pm$ 2 lbs.

5. After the spring life test the withdrawal force shall be greater than 60 percent of the withdrawal force measured prior to test.

(B) 6. The connector insulating materials shall be made of black plastic that shall meet the requirements of the general specification.

7. Plating of metal parts shall be sufficient to prevent corrosion of the basis metal.

(B) 8. The pins shall be capable of moving slightly in any direction to ensure Requirement 4 is met when used with the mating connector. The rear of the connector shall provide a hole for the cordage. The hole shall be on the centerline of the connector and shall be sized to clamp the cordage used on the cable assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:23Z
Check the source to verify that this is the current version before use.

NOTES:

(B) 1. Dimensions in inches. Unless otherwise specified, tolerances:

Metal parts ± .005
Molded sections ± .05

2. This specification supersedes USAF Drawing 46D40829.

Preparing Activity:
Navy - AS
Project No. 5995-N120-38

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:23Z
Check the source to verify that this is the current version before use.