INCH POUND

MIL-DTL-22442/4C(AS)
5 January 1998
SUPERSEDING
MIL-C-22442/4B(AS)
2 September 1988

DETAIL SPECIFICATION SHEET

CABLE ASSEMBLY, AIRCRAFT AUDIO, CONNECTOR (U-6l/U)

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-22442 listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

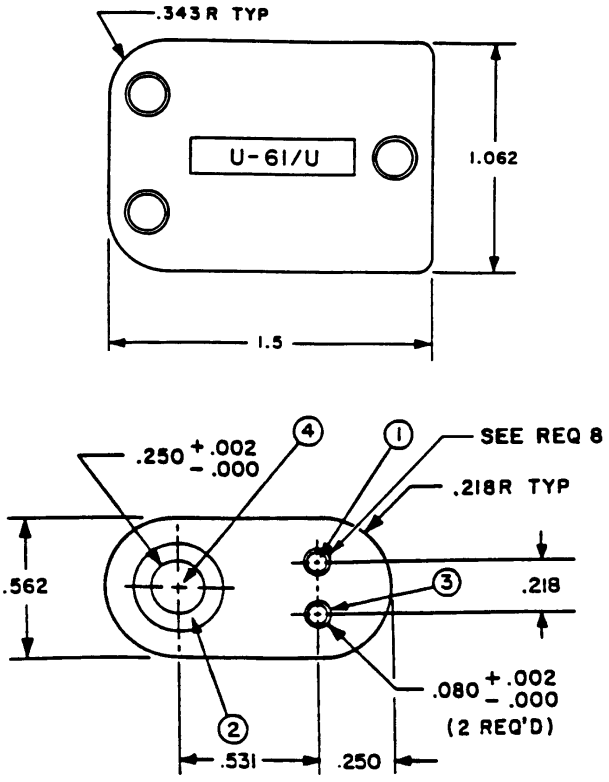

FIGURE 1. Connector P/ N M22442/4-1 (U-61/U).

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:23Z
Check the source to verify that this is the current version before use.

APPLICABLE DOCUMENTS

MIL-J-641 - Jacks, Telephone, General Specification for

REQUIREMENTS:

*l. M22442/4-l (U-61/U) and M22442/4-2 shall be capable of mating with M22442/5 connectors

2. Sampling and testing procedures shall be in accordance with MIL-J-641.

3. The connector shall pass the following tests when tested in accordance with MIL-J-641.

a. Visual and mechanical

b. Dielectric strength

c. Contact resistance

d. Insertion and withdrawal force

e. Spring life

f. Salt spray

g. Insulation resistance

h. Moisture resistance

4. The insertion force shall be 8 lb. maximum. The withdrawal force shall be 6 + 2 lb.

5. After the spring life test the withdrawal force shall be greater than 60 percent of the withdrawal force measured prior to test.

6. The connector insulating materials shall be made of black plastic that shall meet the requirements of the general specification.

7. Plating of metal parts shall be sufficient to prevent corrosion of the basis metal when tested in accordance with MIL-J-641.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:23Z
Check the source to verify that this is the current version before use.

8. The pins shall be capable of moving slightly in any direction to ensure Requirement 4 is met when used with the mating connector. The rear of the connector shall provide a hole for the cordage. The hole shall be on the centerline of the connector and shall be sized to clamp the cordage used on the cable assembly.

*9. The M22442/4-2 connector shall contain an impedance matching transformer in accordance with M22442/1-7.

TABLE I. PART NUMBERS

*

PART NUMBER	
M22442/4-1 (U61/U)	WITH OUT TRANSFORMER
M22442/4-2	WITH TRANSFORMER (M22442/1-7)

NOTES:

1. Dimensions in inches. Unless otherwise specified, tolerances:

   Metal parts ± .005
   Molded sections ± .05

2. This specification supersedes USAF Drawing 46D40829.

*3. The parts specified on this specification sheet are for use on completed and tested cable assemblies. Qualification of individual parts and components is not required.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Preparing activity:
Navy - AS
(Project No. 5995-0128-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:23Z
Check the source to verify that this is the current version before use.