RR-C-82E
June 15, 1971
SUPERSEDING
Fed. Spec. RR-C-82D
January 24, 1969

FEDERAL SPECIFICATION

CANS, ASH AND GARBAGE, CORRUGATED, TAPER-SIDE, ZINC-COATED: AND COVERS

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers corrugated zinc-coated metal cans, with or without covers, or covers only.

1.2 Classification.

1.2.1 Can capacities. Cans covered by this specification shall be of the following nominal capacities, as specified (see 6.2).

5-gallon
10-gallon
16-gallon
24-gallon
32-gallon

1.2.2 Covers. Covers shall be for cans of the following capacities, as specified (see 6.2): 5-, 10-, 16-, 24-, and 32 gallons.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

QQ-S-630	-	Steel, Bar, Carbon, Hot Rolled, (Merchant Quality).
QQ-S-634	-	Steel, Bar, Carbon, Cold Finished, (Standard Quality).
QQ-S-698	-	Steel, Sheet and Strip, Low-Carbon.
QQ-W-461	-	Wire, Steel, Carbon (Round, Bare, and Coated).
QQ-Z-325	-	Zinc Coating, Electrodeposited, Requirements For.
PPP-P-130	-	Pails, Cans and Waste Receptacles, Packing of.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

Federal Standard:

FED-STD-151 - Metals; Test Methods.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standard:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

Army Natick Laboratories Drawings:

2-9-26 - Cans, Ash & Garbage, Corrugated, Taper Side, Zinc Coated, with Covers: Sizes 5 and 10 Gallon.

2-9-27 - Cans, Ash & Garbage, Corrugated, Taper Side, Zinc Coated, with Covers: Sizes 16, 24, and 32 Gallon.

2-9-254 - Cans, Ash & Garbage, Corrugated, Taper Side, Zinc Coated, with Covers: Top and Bottom Bands, Sections Method 3 (5, 10, 16, & 24 Gallon Sizes).

(Miniature copies of Drawings 2-9-26, 2-9-27, and 2-9-254, identified as figures 1, 2, and 3, respectively, are attached for information purposes only.)

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

National Motor Freight Traffic Association, Inc., Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the National Motor Freight Traffic Association, Inc., Agent 1616 P Street, N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Tariff Publishing Officer, Room 202 Union Station, 516 W. Jackson Blvd., Chicago, IL 60606.)

American Society for Testing and Materials (ASTM) Standards:

A90 - Method of Test for Weight of Coating on Zinc-Coating (Galvanized) Iron or Steel Articles.
B117-64 - Method of Salt Spray (Fog) Testing.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

U.S. Department of Health, Education and Welfare:

21CFR1 - Federal Food, Drug, and Cosmetic Act and Regulations Promulgated Thereunder.

(The Code of Federal Regulations (CFR) and the Federal Register (FR) are for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402. When indicated, reprints of certain regulations may be obtained from the Federal agency responsible for issuance thereof.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), the contractor shall furnish a sample for first article inspection and approval (see 4.2, 6.2 and 6.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

3.1.1 Certification. Prior to approval of the first article, if one is submitted, or prior to approval of the first shipment, the supplier shall submit satisfactory evidence to the contracting officer or his authorized representative that the seaming compound for the can and other substances incorporated in the seaming compound used under this specification meet the requirements of Federal Food, Drug, and Cosmetic Act; Food Additive Resulting from Contact with Containers or Equipment and Food Additives Otherwise Affecting Food. (Code for Federal Requirements for Contact with Food.) Acceptable evidence of meeting the requirements of this document shall be a certified report of compliance acceptable to the procuring activity.

3.2 Standard product. The cans and covers covered by this specification shall be the standard commercial items of the manufacturer, except for changes necessary to conform to the requirements of this specification.

3.3 Materials. The materials shall conform to the applicable referenced specifications, standards, and requirements as specified herein. Materials not specified shall be of the quality normally used for cans and covers by the manufacturer, provided that the complete items comply with all the provisions of this specification.

3.3.1 Steel, carbon.

3.3.1.1 Sheet or strip, bare (black) or zinc-coated.

3.3.1.1.1 Bare. Bare sheet or strip carbon steel shall be of thickness shown on figures 1, 2, 3, and 4 and conform to hot-rolled or cold-rolled, commercial quality of QQ-S-698.

3.3.1.1.2 Zinc-coated. Sheet or strip carbon steel shall conform to 3.3.1.1.1 and shall be continuously zinc coated with not less than 2 ounces per square foot total deposit (both surfaces), or not less than .0018-inch thick each surface, when tested as specified in 4.4.5.

3.3.1.2 Bar, flat. Flat bar steel shall conform to flat, hot-rolled, as rolled finish, steel numbers M1010 through M1020 of QQ-S-630, or cold drawn (CD) condition, steel numbers 1010 through 1020 of QQ-S-634.

3.3.1.2.1 Bar, flat, zinc-coated. Flat bar specified in 3.3.1.2 shall be zinc-coated on all surfaces, including edges, as specified in 3.3.1.1.2.

3.3.1.3 Wire. Steel wire shall conform to steel number 1010, 1015, or 1020, finish 1, temper hard, of QQ-W-461, except that at the option of the manufacturer, finish 5, temper hard, class 1 may be furnished for body handles (see 3.4.1.3) and bails (see 3.4.1.5.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

3.3.2 Rivets, steel, flathead, tinners, bare (black) or zinc-coated finished.

3.3.2.1 Bare. The bare steel rivets shall be commercial type as shown on figures 1 and 2.

3.3.2.2 Zinc-coated. The zinc-coated steel rivets shall be as specified in 3.3.2.1 with a coating conforming to type I, class 2 of QQ-Z-325.

3.3.3 Seaming compound. The seaming compound shall comply with 3.1.1 and shall not flow, crack, or become brittle when tested as specified in 4.4.3.1 and 4.4.3.2.

3.4 Design and construction. The design and construction of the cans and covers, shall conform to this specification and to the dimensions, and capacities as shown on Drawings 2-9-26, 2-9-27, and 2-9-254. Sixteen-gallon capacity, and larger cans shall be so constructed that when cans of the same capacity are partially nested, they rest on the body handles. The complete can and cover shall be fabricated from materials specified in 3.3.1.1.1, 3.3.1.2, and 3.3.2.1, and zinc-coated in accordance with 3.5, after fabrication. Alternatively, they may be fabricated using materials conforming to 3.3.1.1.2, 3.3.1.2.1, and 3.3.1.3, 3.3.2.2, and 3.3.3, or a combination of these materials, provided the finished can meets the requirements of this specification. The completed cans, when tested as specified in 4.4.1 and 4.4.2, shall not deform more than 1 inch inwardly or outwardly in the overall can dimension (top or bottom bands, body side or bottom, bail and handle clips); top or bottom bands shall not loosen, and shall not leak initially more than one drop per second, or lose not more than .2 of one percent of contents, and shall stop leaking prior to the end of 24 hours after the filling of the can for the leak test.

3.4.1 Bodies (all size cans). Can bodies shall be formed of two equal pieces of sheet steel specified in 3.3.1.1. Two horizontal stiffening corrugations shall be formed near the top. Vertical corrugations of the number shown on Drawings 2-9-26 and 2-9-27 shall be die formed in the body sheet. A horizontal stiffening corrugation shall be rolled into the body sheets, as applicable, and fabricated as shown on Drawings 2-9-26 and 2-9-27. All corrugations shall be of the dimensions (approximate) shown on Drawings 2-9-26 and 2-9-27. Side joints shall be grooved seams for cans galvanized after fabrication. The side joints of cans made from zinc coated sheet steel (see 3.3.1.1.2) shall be groove seamed and compound lined using seaming compound specified in 3.3.3. The seaming compound shall be applied to the open seams prior to closing the seams. The top and bottom bands shall be as shown on Drawings 2-9-26, 2-9-27, and 2-9-254. Interchange of top and bottom band construction will be permitted, provided that

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

overall dimensions specified on Drawings 2-9-26, 2-9-27 and 2-9-254 are maintained. Alternate to riveting as shown for method 1 bottom band and method 2 top band (see Drawings 2-9-26 and 2-9-27), the bands may be either continuous welded or spot welded using not less than 2 spot welds for each rivet specified (see Drawings 2-9-26 and 2-9-27).

3.4.1.1 Bottoms. Bottoms shall be formed from one piece of sheet steel specified in 3.3.1.1, and shall be stiffened by three corrugations or concaving on the 5- and 10-gallon cans and by concaving on the 16-gallon and larger cans. The corrugations and concaving shall of the dimensions shown on Drawings 2-9-26 and 2-9-27, as applicable. The edge of the bottom shall be fabricated as shown on Drawings 2-9-26, 2-9-27, and 2-9-254, as applicable. The bottom of cans made from zinc coated sheet steel (see 3.3.1.1.2) shall be formed as specified herein. The seaming compound shall be applied to the bottom flange prior to double seaming with the body.

3.4.1.2 Bands. Bands shall be made of steel bar as specified in 3.3.1.2 or sheet steel specified in 3.3.1.1 and shall be butt welded.

3.4.1.3 Body handles. Body handles of the design shown on Drawing 2-9-27 shall be drop type, formed from steel wire specified in 3.3.1.3.

3.4.1.4 Clips for body handles (16-, 24-, and 32-gallon capacity). Clips for body handles shall be made from sheet steel specified in 3.3.1.1, as applicable, formed to fit the corrugations or debossed flat area on can body, and so shaped that handles will come to a stop when raised approximately 70 degrees. Clips shall be centered over body seams and riveted to the body, as shown on Drawings 2-9-26 and 2-9-27; or at the option of the supplier, welded with a minimum of four spot welds, located as specified for riveting. Clips shall not become loose or pull away or the handle stops deformed, allowing handles to be raised more than 5 degrees above the original approximate 70 degrees from the body, when tested as specified in 4.4.4.

3.4.1.5 Clips for bails (5-gallon and 10-gallon capacity). Bail clips shall be made from sheet steel specified in 3.3.1.1. Clips shall be formed to fit corrugations or debossed flat area on can body. Clips shall be centered over body seams and riveted to the body, as shown on Drawing 2-9-26; or at the option of the supplier, welded with a minimum of two spot welds located as specified for riveting. Clips shall not become loose or pull away when tested as specified in 4.4.4.

3.4.1.5.1 Bails. Bails, of the design shown on Drawing 2-9-26, shall be formed from steel wire specified in 3.3.1.3, shaped so as to lock the cover in place when the bail is in carrying position.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

3.4.2 Covers. Covers shall be formed from one piece of sheet steel specified in 3.3.1.1, and stiffened by means of concentric offsets (see Drawings 2-9-26 and 2-9-27). Flanges shall be straight sided and have a beaded edge. As an alternate to the straight sided flange, an offset beaded flange may be used for nesting of covers without jamming.

3.4.2.1 Clips for cover handles. The clips for cover handles shall be formed from sheet steel specified in 3.3.1.1 and be riveted to the cover with two rivets, 4 pound size, or welded with a minimum of two spot welds.

3.4.2.2 Cover handles. The cover handles shall be formed from steel wire specified in 3.3.1.3, and shall be of the dimensions and shape specified on Drawings 2-9-26 and 2-9-27.

3.5 Finish. Components of the can and cover and the completed can and cover fabricated from steel specified in 3.3.1.1.1 and 3.3.1.2 shall be cleaned and loose scale or rust removed prior to being completely coated with zinc by the hot dip process. The weight of the coating shall be not less than 2 ounces per square foot (both surfaces) when tested as specified in 4.4.5.1 or thickness of coating shall be not less than 0.0018 inch thick (each surface) when tested as specified in 4.4.5.2. Components of the can and cover, and the complete can and cover, fabricated from steel specified in 3.3.1.1.2 and 3.3.1.2.1, or prefinished wire bales and handles shall be cleaned. All cans shall have no exposed inside or outside surface area of no zinc or damaged finish, except cut edges of zinc coated steel sheet or strip specified in 3.3.1.1.2. The coating on all cans and covers shall adhere and not peel when tested as specified in 4.4.6. There shall be no visible red rust at any location on the can and cover when tested in accordance with 4.4.7. There shall be no visual cracks or flaking of the finish due to forming. Organic coatings shall not be used to cover exposed areas.

3.6 Marking for identification. All can covers and can bottoms shall be legibly and permanently embossed with the manufacturer's identification or trademark and the can capacity in characters approximately 5/8 inch high conforming to industry practice.

3.7 Workmanship. The can shall be clean, sound, and free from cracks, burned or reduced areas, flux, scale, spatter, or flash. All edges of the bands shall be deburred or rounded. The finish shall be free from lumps, blisters, grit, uncoated areas, dross, flux, black, or acid spots.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted the Government reserves the right to check test such items to determine the validity of the certification.

4.2 First article inspection. When a first article is required, it shall be examined for defects in table I, dimensions specified, and tested as specified in 4.4.1, 4.4.2, 4.4.4, 4.4.5.1, 4.4.6, and 4.4.7, as applicable. The presence of any visual defect, any dimension not within specified requirements, or failure to pass the applicable tests shall be cause for rejection of the preproduction sample.

4.3 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.3.1.1 Seaming compound. The seaming compound shall be tested in accordance with 4.4.3.1 and 4.4.3.2. The sample unit shall be 2 ounces of the seaming compound for each test. The test shall be conducted on each lot of seaming compound offered at one time. Failure to meet the requirements of 3.3.3 shall be cause for rejection of the lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

4.3.2 In-process inspection.

4.3.2.1 In-process examination. Examination shall be made during the manufacturing process for the cleaning and removal of loose scale and rust prior to zinc coating (see 3.5), as applicable. Examination shall be made for application of seaming compound in seams of cans, prior to locking the seam when cans are made of zinc-coated sheet steel specified in 3.3.1.1.2. Any nonconformance shall be cause for rejection of the item and the process shall be adjusted.

4.3.2.2 In-process zinc-coat testing. When the supplier elects to test the zinc-coating by weighing, the testing shall be performed in accordance with 4.4.5.1. Three test specimens, 2-1/4 inches square minimum, made from the same material as the can body and cover, and prepared as specified in 3.5. These test specimens shall be prepared on each lot of pre-galvanized or hot-dipped steel prior to fabrication of the can and cover offered for inspection at one time. Failure to meet the zinc-coat weight requirements of 3.5 shall be cause for rejection of the item and the process shall be adjusted. When the supplier elects to test the zinc-coating by the thickness test, the test shall be performed on the end item as specified in 4.4.5.2.

4.3.3 End item inspection. The lot shall be all cans of one capacity and cover or cans or covers only, as applicable, offered for inspection at one time. The sample unit shall be one completely finished can and cover or can or cover only.

4.3.3.1 Visual examination. The end item shall be examined for defects in table I. The inspection level shall be level II, with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE I. Classification of defects

Examine	Defect	Classification Major	Minor
Finish	Not zinc coated	101	
	Area of no coating	102	
	Contains lumps, blisters, gritty areas, black spots, dross, and flux		201

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (con.)

Examine	Defect	Classification Major	Minor
Design, construction and workmanship	Not as specified	103	
	Part not as specified		202
	Dented (except tested area), buckled, warped, or bent out of shape		203
	Missing (except rivets) or in wrong location	104	
	Broken, fractured, or cracked	105	
	Sharp projection, tear, or edge	106	
	Can lopsided		204
	Not rigid, or shape does not permit nesting (i.e., each size complete with covers within the next larger size)	107	
	Does not nest evenly, or does not rest on body handles when partially nested without covers (size 16-gallon and larger only)	108	
Welding	Weld omitted; not fused, broken, or burned through	109	
	Weld pitted or flash or spatter not removed		205
Bodies	Not two equal pieces of steel		206
	Two horizontal corrugations missing near top		207
	Quantity of vertical corrugations not as shown on applicable figure		208
	Horizontal corrugation at top edge of bottom band missing		209
	Side joints not a grooved seam		210
	Band at top or bottom missing	110	
	Top and bottom band(s) assembly not as shown on applicable figure	111	
	Hole or open seam	112	
Bottoms	Not one piece of steel	113	
	Corrugations or concaving as applicable, missing		211

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (con.)

Examine	Defect	Classification Major	Minor
Bottoms (con.)	Edge not turned down over bottom band	114	
	Edge not seamed with the body	115	
	Hole or open seam	116	
Covers	Not one piece of steel		212
	Concentric offsets missing		213
	Not concave shape	117	
	Do not fit can, as applicable	118	
	Will not nest	119	
	Beaded edge missing	120	
Clips	Cover handle clips not as shown on figures		214
	One or more spot welds missing (when applicable)	121	
	One or more rivets missing (when applicable)	122	
Handle	Cover handle not as shown on figures		215
Bail clips 5- and 10-gallon cans	Not formed to fit body		216
	One or more rivets missing (when applicable)	123	
	One or more spot welds missing (when applicable)	124	
	Not centered over body seams	125	
Body clips, 16-, 24-, and 32-gallon cans	Not formed to fit body		217
	One or more spot welds missing (when applicable)	126	
	Not centered over body seams	127	
Bails 5- and 10-gallon cans	Not as specified		218
	Do not lock cover in place when in carrying position		219
Body handles 16-, 24-, and 32-gallon cans	Not drop type	128	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (con.)

Examine	Defect	Classification Major	Classification Minor
Rivets	Rivet missing, not peened, or head broken off	129	
	Rivets on top and bottom band not equally spaced or not type specified		220
Identification marking	Missing, illegible, incomplete, incorrect, wrong size, or location		221
	Not embossed		222

4.3.4 Examination for defects in dimensions. Examination shall be made of the cans and covers for defects in dimensions. Any dimension that is not within the specified requirements shall constitute a defect. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

4.3.5 End item testing. Testing of the completely finished cans and covers, applicable (see 4.4.3) shall be performed in accordance with table II for the characteristics shown therein. Any nonconformance shall constitute a defect. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

TABLE II. End item testing of cans and covers

Characteristic	Requirement paragraph	Test procedure	Requirement applicable to: Indiv unit	Requirement applicable to: Lot average	Sample unit	Inspection
Leakage	3.4	4.4.1	X	--	One can	Pass or fail
Thickness or weight of zinc coating	3.5	4.4.5	X	--	One can or cover	Pass or fail

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE II. End item testing of cans and covers (con.)

Characteristic	Requirement paragraph	Test procedure	Requirement applicable to Indiv unit	Requirement applicable to Lot average	Sample unit	Inspection
Coating adhesion	3.5	4.4.6	X	--	One can or cover	Pass or fail
Welding:						
Bail clips (5- and 10-gallon)	3.4.1.5	4.4.4	X	--	One can	Pass or fail
Body handle clips	3.4.1.4	4.4.4	X	--	One can	Pass or fail
Drop	3.4	4.4.2	X	--	One can	Pass or fail
Salt spray test	3.5	4.4.7	X	--	One can or cover	Pass or fail

4.3.6 Examination of preparation for delivery requirements. Examination of preparation for delivery shall be made in accordance with PPP-P-130.

4.4 Tests.

4.4.1 Leakage. Each can to be tested shall be filled with water within 1/2 inch of the top and allowed to stand for 24 hrs. Any nonconformance with requirements of 3.4 shall constitute failure of this test.

4.4.2 Drop test. The finished can shall be inverted with bail secured and dropped from a height of 40 inches onto each quadrant of the top (4 drops) onto a concrete floor or steel plate. The can shall then be loaded with wet sand or other dead weight material and dropped from a height of 40 inches onto each quadrant of the bottom onto a concrete floor or steel plate. The weight of the load shall be 6-1/2, 13, 21, 31-1/2 and 42 pounds for can capacities of 5-, 10-, 16-, 24- and 32-gallons, respectively. The can shall then be filled with water to within 1/2 inch of the top and allowed to stand for 24 hours and then examined. Any nonconformance with contour deformation and leakage requirements of 3.4 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

4.4.3 Seaming compound tests.

4.4.3.1 High temperature test. The seaming compound shall be spread and dried as a thin film on tin plate and exposed to a forced hot air oven at +212°F. plus or minus 5° F. for 40 hours. Any nonconformance with the high temperature requirements of 3.3.3 shall constitute failure of this test.

4.4.3.2 Low temperature test. The seaming compound shall be spread and dried as a thin film on a tin plate and exposed to a temperature of -40° F. plus or minuts 5° F. for 24 hours. The tin plate shall be bent back on itself so that the coating is on the outer surface. Any nonconformance with the low temperature requirements of 3.3.3 shall constitute failure of this test.

4.4.4 Clips, bails, and handle tests. The can shall be loaded with a weight equivalent to two times the weight of the can's capacity in water and lifted by the bail or handles as applicable, clear off the floor and allowed to remain suspended for 30 minutes. The can clips and handle stop or bail, as applicable shall be examined. Any nonconformance with the clip and handle looseness, pull-away, or deformation requirements of 3.4.1.4 and clip looseness or pull-away requirements of 3.4.1.5 shall consitute failure of this test.

4.4.5 Zinc coating test.


4.4.5.1 Weight. The weight of zinc coating shall be determine to nearest 0.01 ounce in accordance with Test Method 512 of FED-STD-151. Any nonconformance with zinc coating weight requirements of 3.5 shall constitute failure of this test.

4.4.5.2 Thickness. The thickness of the zinc coating shall be checked to the nearest 0.0001 with a magnetic type gage in accordance with industry's standard commercial practice. Readings shall be taken on the inside surface and outside surface of can or cover. Any nonconformance with the thickness requirement of 3.5 shall constitute failure of this test.

4.4.6 Zinc coating adhesion test. A 1/2 pound steel ball shall be dropped from a height of two feet on the can or cover, as applicable. Results shall then be examined. Any nonconformance with the coating adherence requirements of 3.5 shall constitute failure of this test.

4.4.7 Salt spray tests. Cans with cover or without cover or cover only as applicable shall be subjected to a 96-hour salt spray test in accordance with ASTM B117-64. No areas or edges of the cans or covers shall be protected during this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

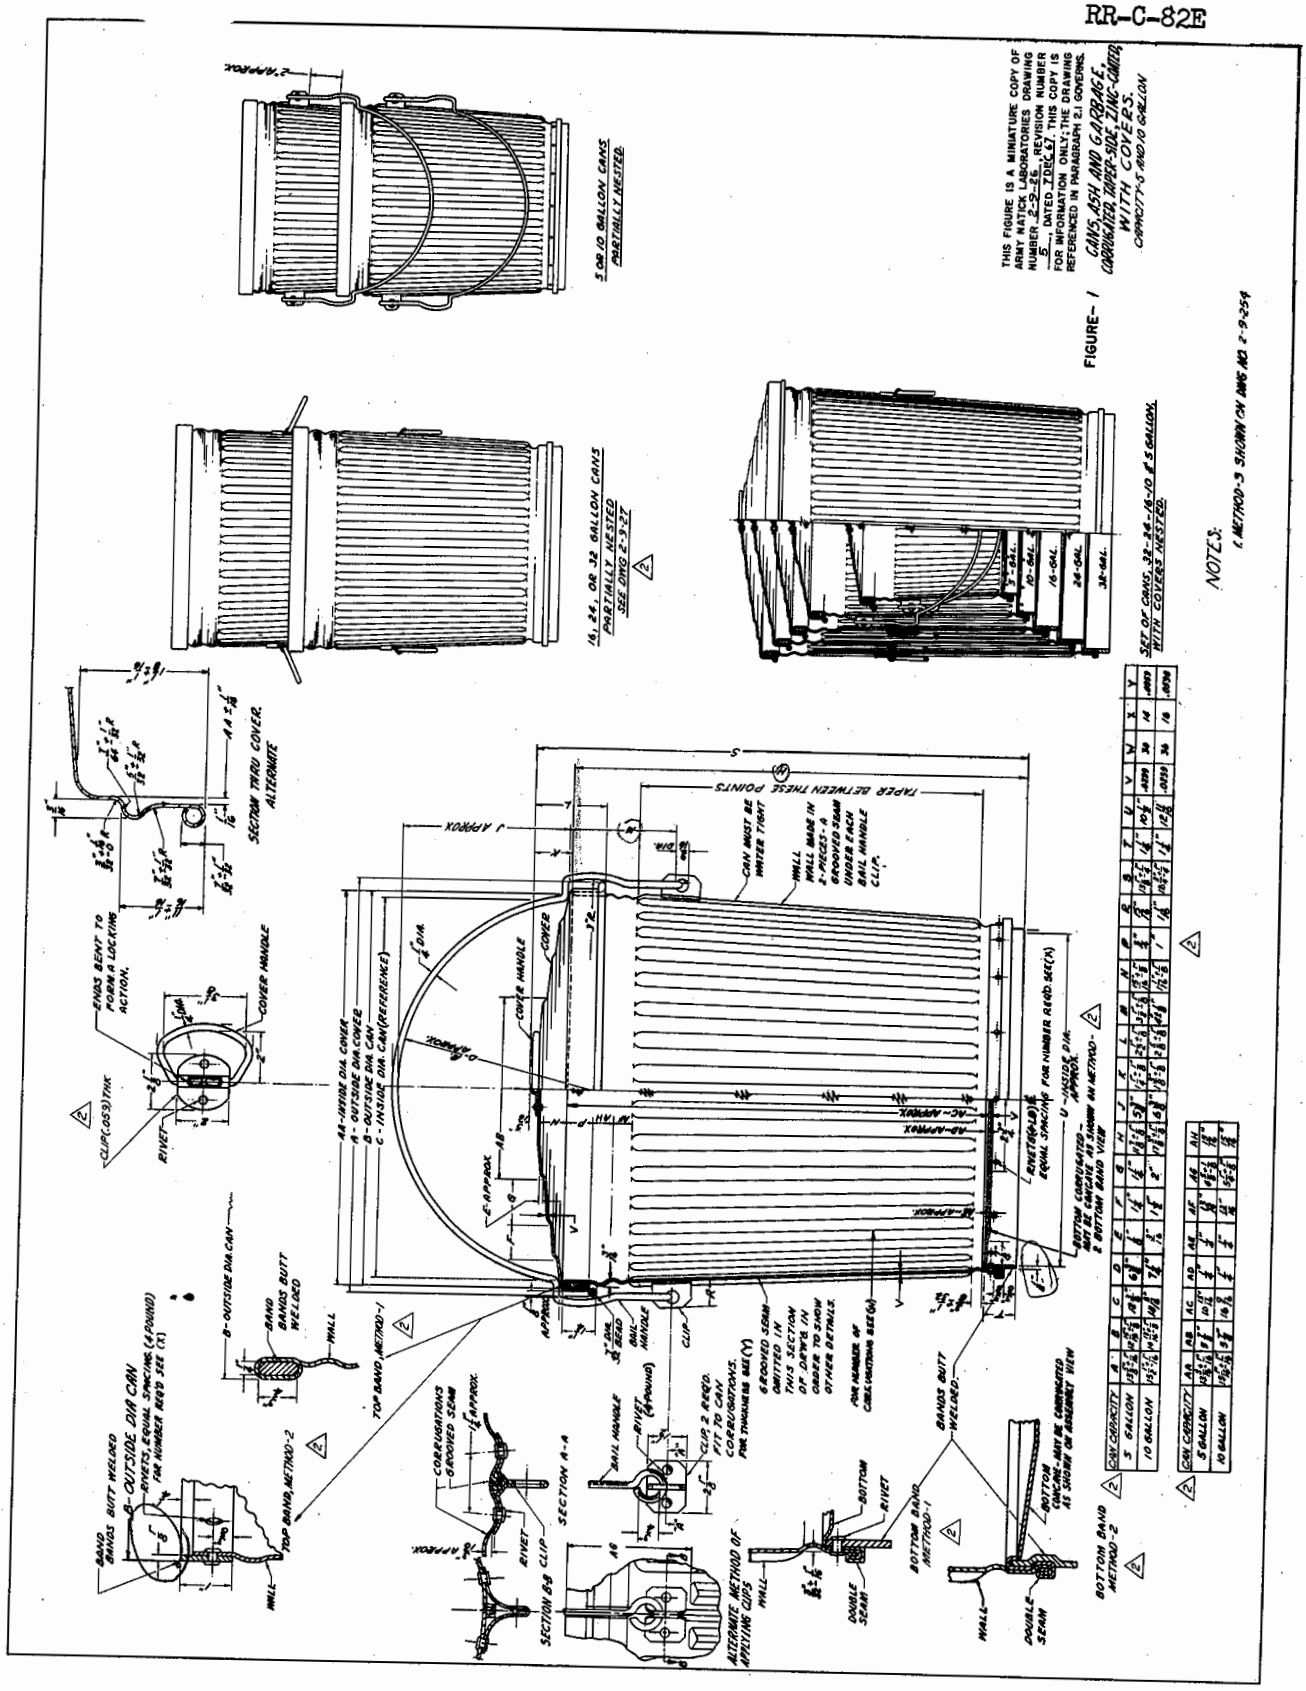


THIS FIGURE IS A MINIATURE COPY OF ARMY NAVY CIVIL LABORATORIES DRAWING NUMBER 2-9-254, REVISION NUMBER 5, DATED 20 OCT 54. THIS COPY IS FOR INFORMATION ONLY; THE DRAWING REFERENCED IN PARAGRAPH 2.1 GOVERNS.

FIGURE - 1

CANS, ASH AND GARBAGE, GALVANIZED, UNDER-SIDE, ZINC-COATED WITH COVERS.
CAPACITY 5 AND 10 GALLON

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

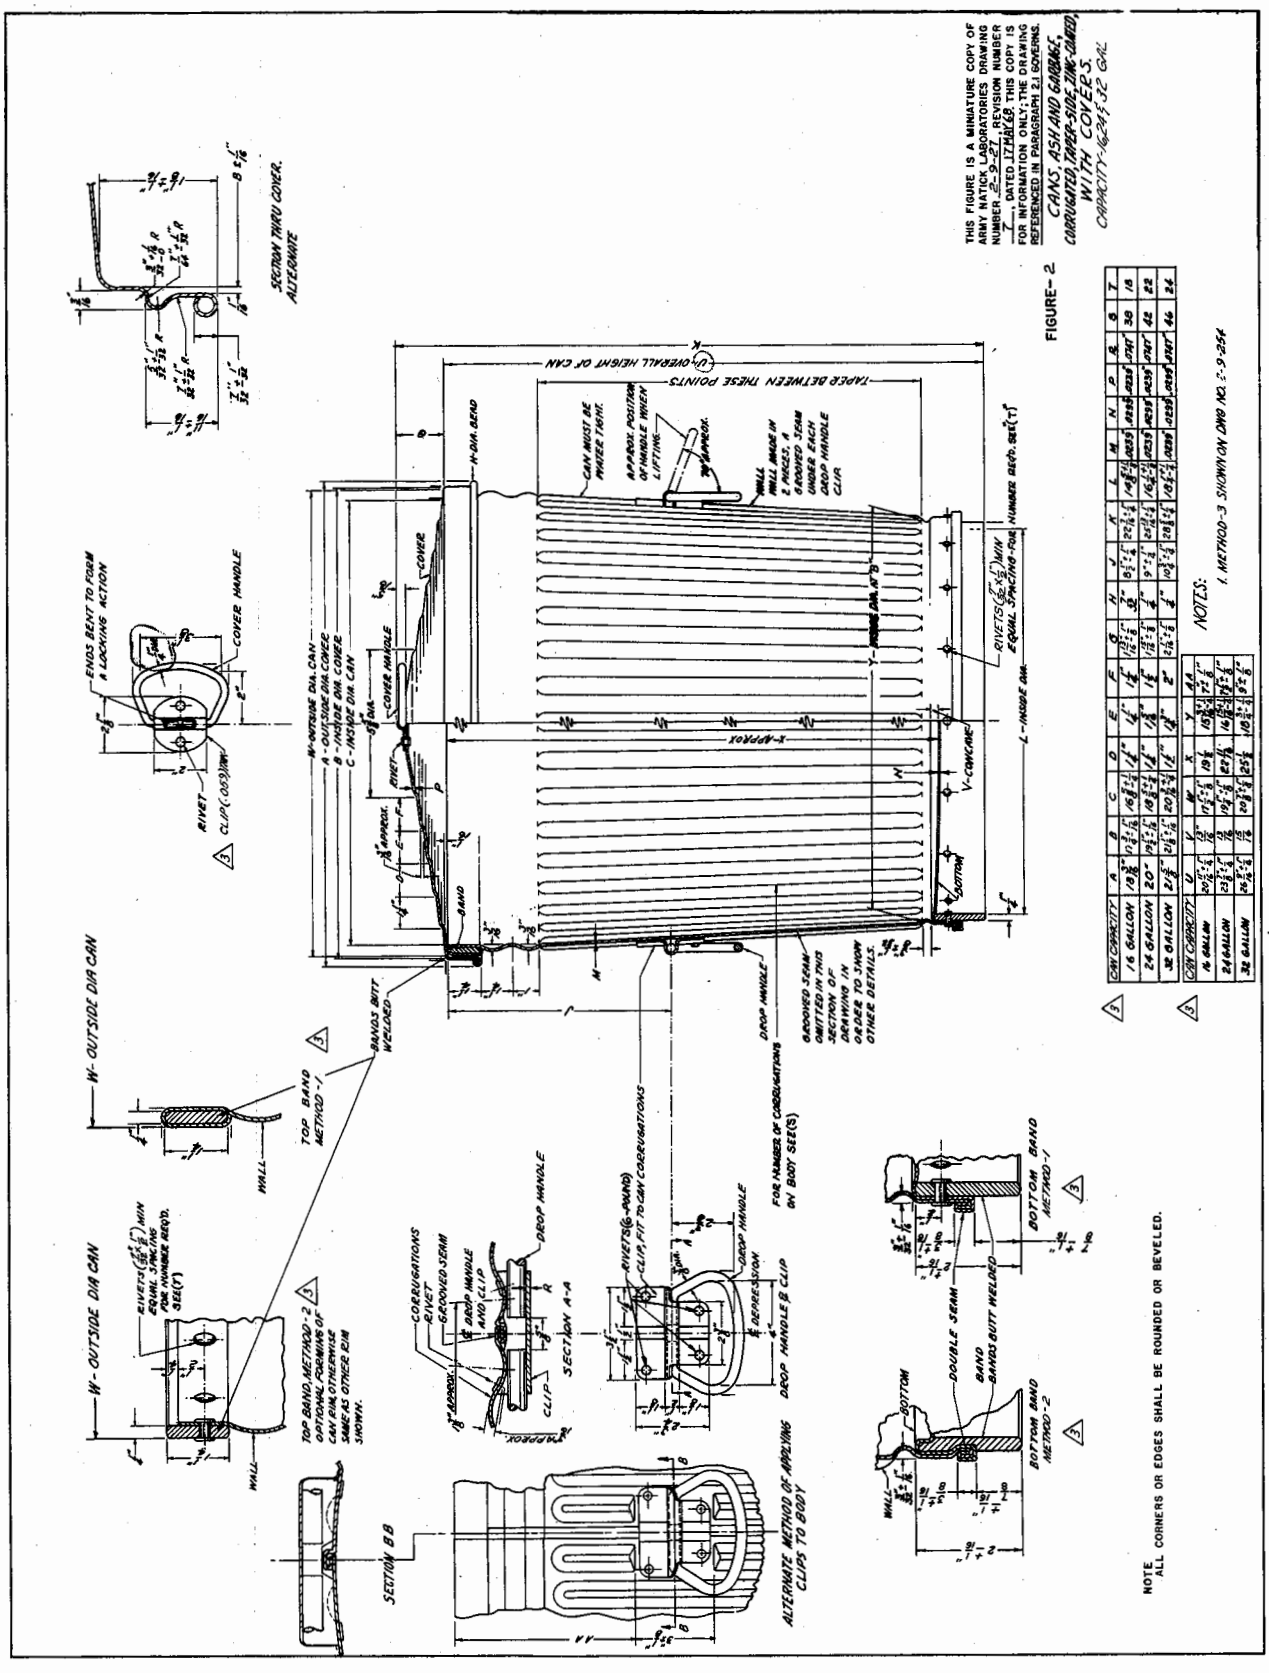

CAN CAPACITY	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	S	T
16 GALLON	18⅜"	19⅛"	16⅜"	14"	12"	14"	12⅜"	8"	6⅞"	22⅝"	14⅝"	.1235"	.1235"	.1235"	.1250"	30	18
24 GALLON	20"	20⅞"	18⅜"	17"	15"	18"	15⅜"	9"	7"	25⅝"	16⅝"	.1235"	.1235"	.1235"	.1250"	42	22
32 GALLON	21⅜"	21⅞"	20⅜"	17"	15"	18"	15⅜"	10"	8"	28⅝"	18⅝"	.1235"	.1235"	.1235"	.1250"	46	24

CAN CAPACITY	U	V	W	X	Y	AA
16 GALLON	20⅝"	13"	15⅜"	15⅜"	15⅛"	12⅞"
24 GALLON	23⅛"	13"	17⅜"	17⅜"	17⅛"	14⅞"
32 GALLON	24⅝"	13"	19⅜"	19⅜"	19⅛"	16⅞"

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

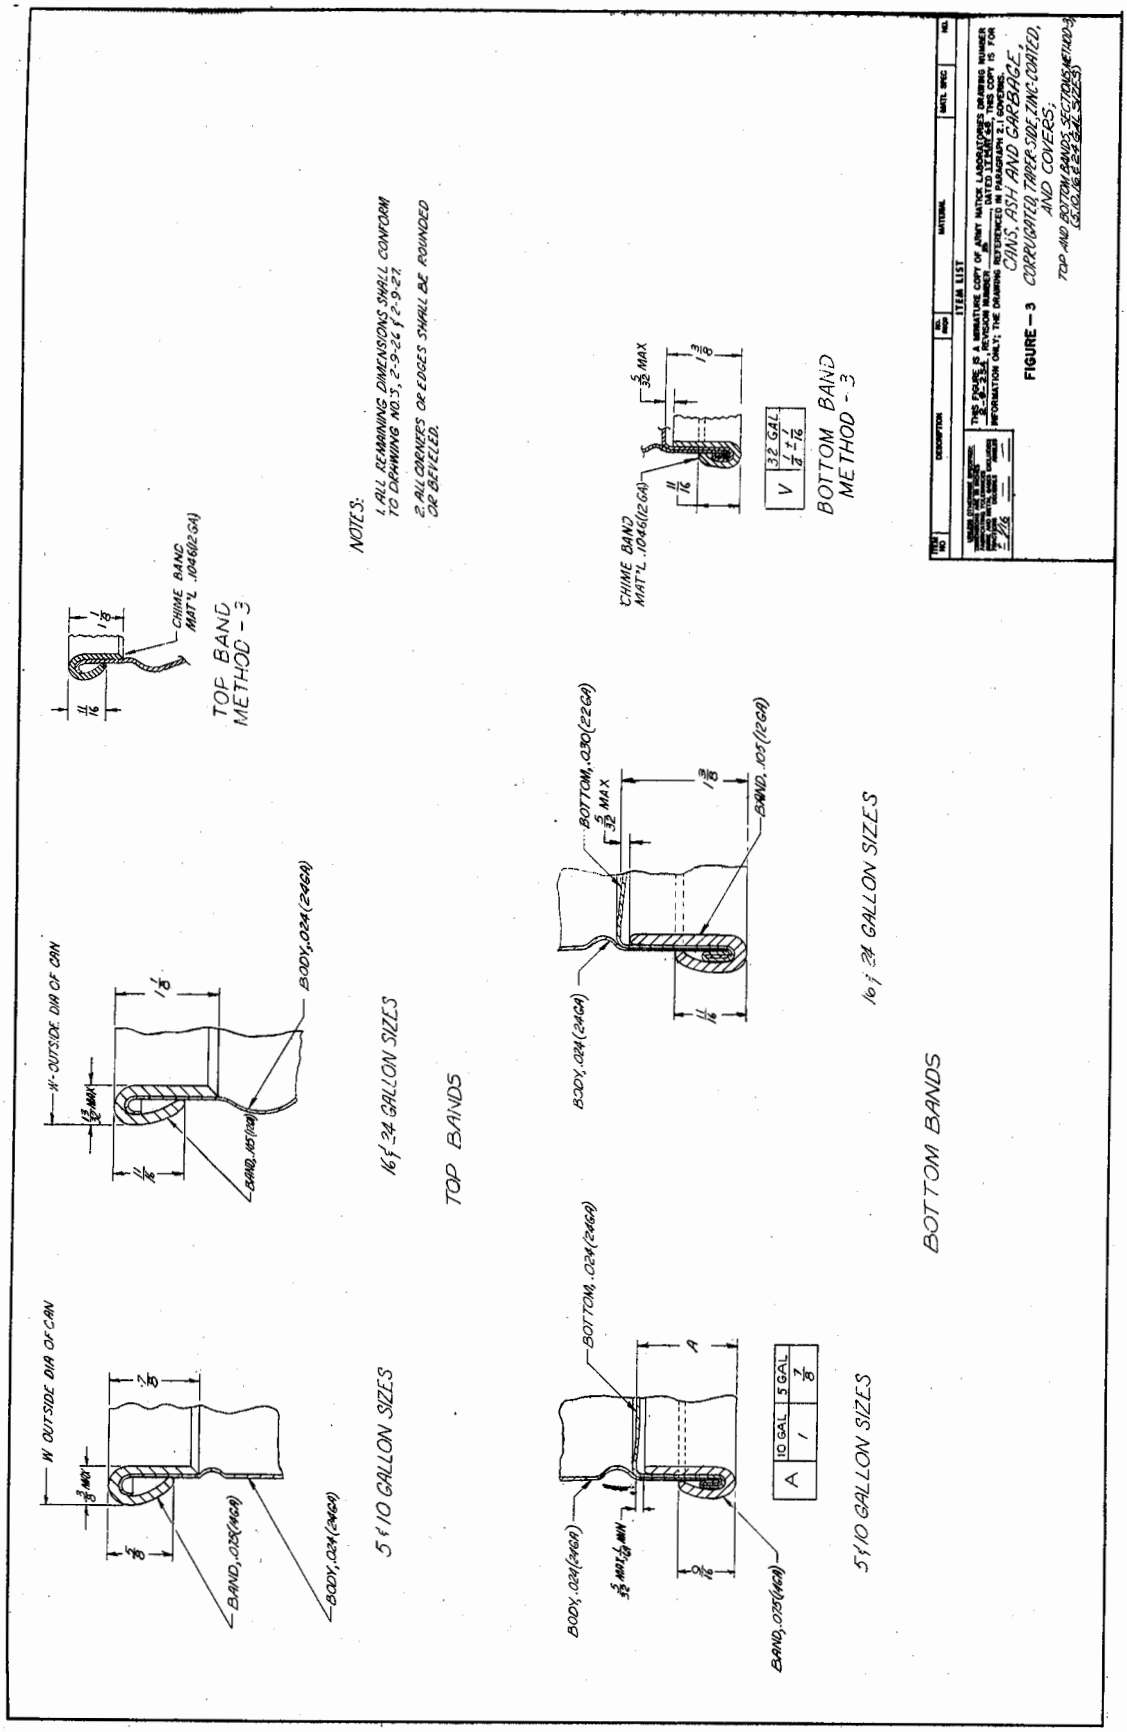


FIGURE – 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packing and marking. Packing and marking for level A, B, or C shall be in accordance with PPP-P-130 (see 6.2).

6. NOTES

6.1 Intended use. The cans covered by this specification are intended to be used as containers for garbage and rubbish. The 32-gallon capacity can may be used to heat potable water for food service utensil washing and sanitizing under emergency or field conditions.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Capacity of can required with corresponding cover, or without cover (see 1.2.1).
(c) Cover required (see 1.2.2).
(d) When a first article is required (see 3.1, 4.2, and 6.3).
(e) Selection of applicable level of packing required (see 5.1).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of ASPR 7-104.55. The first article should be a preproduction sample. The preproduction sample should consist of one unit (can and cover, can without cover, or cover only, as applicable). The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

MILITARY CUSTODIAN:

Army - GL

Review activity:

Army - MD

User activities:

Army - CE
Navy - YD, MC

Preparing activity:

Army - GL

CIVIL AGENCIES INTEREST:

AGR
COM
GSA
HEW
JUS-FPI
DC
VA

Project No. 7240-0156

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

Cans, Ash and Garbage, Corrugated, Taper-Side, Zinc-Coated: and Covers RR-C-82E

ORGANIZATION

CITY AND STATE	CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*	DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

U.S.MAIL

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.