RR-C-82F
November 4, 1976
SUPERSEDING
Fed. Spec. RR-C-82E
June 15, 1971

FEDERAL SPECIFICATION

CANS, ASH AND GARBAGE, AND COVERS

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers corrugated zinc-coated metal cans, and can covers.

1.2 Classification. Cans and can covers covered by this specification shall be of the following sizes, as specified (see 6.2).

Item I - Can

Item II - Can cover

Size - 5-gallon
- 10-gallon
- 16-gallon
- 24-gallon
- 32-gallon

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

QQ-S-698	-	Steel Sheet and Strip, Low-Carbon.
QQ-S-775	-	Steel Sheets, Carbon, Zinc Coated.
QQ-W-461	-	Wire, Steel, Carbon (Round, Bare, and Coated).
QQ-Z-325	-	Zinc Coating, Electrodeposited, Requirements For.
PPP-P-130	-	Pails, Cans and Waste Receptacles, Packing of.

FSC 7240

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers, at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Ft. Worth, Denver, San Francisco, Los Angeles and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standard:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

LAWS AND REGULATIONS

21-CFR 121 - Federal Food, Drug, and Cosmetic Act and Regulations Promulgated Thereunder

(The Code of Federal Regulations (CFR) and the Federal Register (FR) are for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402. When indicated reprints of certain regulations may be obtained from the Federal agency responsible for the issuance thereof.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

American Society for Testing and Materials (ASTM)

A 90 - Test for Weight of Coating on Zinc-Coated (Galvanized) Iron or Steel Articles
B 117 - Method of Salt Spray (Fog) Testing
B 499 - Measurement of Coating Thicknesses by the Magnetic Method: Nonmagnetic Coatings on Magnetic Basis Metals

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Standard product. The cans and covers covered herein shall be the manufacturer's current standard product, except for any changes necessary to comply with specification requirements.

3.2 Materials. Materials shall conform to the applicable specifications and requirements specified herein. Materials not specifically defined shall be of the quality used by the manufacturer in his commercial cans.

3.2.1 Steel sheet and strip. Steel sheet and strip shall conform to type I, class b of QQ-S-775 or commercial quality of QQ-S-698.

3.2.2 Wire. Steel wire shall conform to steel number 1010 through 1020, hard tensile strength of QQ-W-461. The finish shall be either finish 1 or finish 5, class 1.

3.2.3 Seaming compound. The seaming compound shall not flow, crack, or become brittle when tested as specified in 4.3.1. The seaming compound shall meet the requirements of the Federal Food, Drug, and Cosmetic Act and Regulations Promulgated Thereunder (see 4.1.1).

3.3 Design. The cans and can covers shall conform to the requirements specified herein and in table I and shall be similar to figures 1 and 2. Figures 1 and 2 are included for illustration only and are not intended to preclude the purchase of cans or covers otherwise in accordance with the requirement specified herein except cans shall nest as shown in figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions

Cans					Covers	
	Outside diameter		Height	Corrugations		
Can size gallons	Top ± 1/8	Bottom ± 1/8	Overall ± 1/8	Number ± 1	Inside diameter ± 1/16	Height overall ± 1/8
5	12-15/16	10-3/4	11-7/8	30	13-3/16	2-1/2
10	14-13/16	12-15/16	17-3/8	36	15-1/16	2-5/8
16	17-1/2	15-3/8	20-11/16	38	17-3/4	3-1/16
24	19-1/4	16-1/2	23-7/8	42	19-1/2	3-3/16
32	20-7/8	18-1/4	26-9/16	46	21-1/8	3-5/16

3.4 Performance. The top of the can shall not become deformed more than 1 inch when tested as specified in 4.3.2. The cans, loaded with the weights specified in table II, shall not become deformed more than 1 inch (see 4.3.2). The cans shall not leak more than the amounts specified in table II, when tested as specified in 4.3.2. Clips, handles, and bails shall not deform or pull away from the can body and handles shall not raise more than 75 degrees, when the can is loaded with the weights specified in table II (see 4.3.3).

TABLE II. Test weights and volumes

Can size	Drop test pounds	Leak test ounces	Clip test pounds
5	6.5	2.5	80
10	13	5	160
16	21	8	256
24	31.5	12	384
32	42	16	512

3.5 Construction.

3.5.1 Cans.

3.5.1.1 Body and bottom. The can body and bottom shall be fabricated of 0.0247 galvanized or 0.0239 uncoated steel specified in 3.2.1. The body shall be formed of two equal sheets, joined by grooved seams. The bottom shall be fabricated of a single sheet joined to the body by double clamping. When galvanized sheets are used, the inside of the seam shall be coated with seaming compound specified in 3.2.3. The body shall be reinforced as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

The top shall be reinforced with 0.125 inch thick strip specified in 3.2.1.

Two 1 inch horizontal corrugations rolled below the top bar.

Vertical corrugations, of the number specified in table I, below the horizontal corrugations. One 3/8 inch horizontal corrugation rolled below the vertical corrugations.

The bottom seam shall be reinforced with 0.125 inch thick strip specified in 3.2.1.

The bottoms shall be reinforced by concaving, except bottoms of 5- and 10-gallon cans may be reinforced by not less than three corrugations.

3.5.1.2 Clips. Bail clips for 5 gallon cans shall be fabricated of 0.0371 galvanized sheet or 0.0359 uncoated sheet specified in 3.2.1. Bail clips for 10 gallon cans shall be fabricated fo 0.0587 galvanized sheet or 0.0575 uncoated sjeet specified in 3.2.1. Handle clips for 16- through 32-gallon cans shall be fabricated of 0.0761 galvanized sheet or 0.0747 uncoated sheet specified in 3.2.1.

3.5.1.3 Bails and handles. Bails and handles shall be formed of the wire specified in 3.2.2. Bails shall be fabricated of 0.250 inch diameter wire. Handles shall be fabricated of 0.375 inch diameter wire. Bail ends shall be formed into loops and closed after engaging the clips. The bail shall rotate about the pail without binding, and shall lock the cover in place. Handles shall be of the drop type.

3.5.2 Covers. Covers shall be formed from one piece of 0.0247 galvanized or 0.0239 uncoated sheet specified in 3.2.1, and stiffened by not less than three concentric offsets. Dimensions shall be as specified in table I. Flanges shall be straight sided and have a beaded edge or an offset beaded flange. The clips for cover handles shall be formed from 0.0587 galvanized or 0.0575 uncoated sheet steel specified in 3.2.1 and be riveted to the cover with two 4-pound size rivets, or welded with a minimum of two spot welds. The cover handles shall be formed of 0.250 steel wire specified in 3.2.2.

3.6 Finish. Uncoated steel parts shall be cleaned of grit, loose scale, and rust. Cleaned steel parts shall be galvanized in accordance with type II, class 1 of QQ-Z-325 or zinc coated by the hot dip process (see 4.2.2.1). The weight of the hot dip coatings shall be not less than 2 ounces per square foot (both surfaces) or the thickness of coating shall be not less than 0.0018 inch thick (each surface) when tested as specified in 4.2.2.2. The complete can or cover

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

shall be cleaned. Zinc coatings damaged or removed from any surface during the manufacturing process shall be repaired. There shall be no visible corrosion of the base metal or zinc coating when the can or cover is tested as specified in 4.3.4.

3.7 Marking. Can covers and can bottoms shall be legibly and permanently embossed with the manufacturer's identification or trademark, and the can capacity.

3.8 Workmanship. The can shall be clean, sound, and free from cracks, burned or reduced areas, flux, scale, spatter, or flash. All edges of the bands shall be deburred or rounded. The finish shall be free from lumps, blisters, grit, uncoated areas, dross, flux, black, or acid spots.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification (see 3.2.4).

4.2 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.2.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.2.1.1 Seaming compound. The seaming compound shall be tested in accordance with 4.3.1. The sample unit shall be 2 ounces of the seaming compound for each test. The tests shall be conducted on each lot of seaming compound made of the same materials and processed as a batch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

4.2.2 In-process inspection.

4.2.2.1 In-process examination. When uncoated steel is used, examination shall be made for the cleaning and removal of loose scale and rust prior to zinc coating. When zinc coated sheet steel is used, examination shall be made during assembly for application of the seaming compound. Nonconformance with 3.5.1.1 or 3.6, as applicable, shall be cause for rejection of the affected items and the process shall be adjusted.

4.2.2.2 In-process hot dip zinc-coat tests. Hot dip galvanized steel parts shall be tested for either weight of zinc coating in accordance with ASTM A 90 or thickness of zinc coating in accordance with ASTM B 499. The parts shall be tested for adhesion of zinc coating in accordance with QQ-Z-325. The lot shall be all steel parts of the same configuration hot dip galvanized at one time. The inspection level shall be S-1. Evidence of light or thin coating or flaking, peeling or blistering shall be cause for rejection of the part and the process shall be adjusted.

4.2.3 End item inspection. The lot shall be all cans of one size or covers of one size, as applicable, offered for inspection at one time. The sample unit shall be one completely finished can or cover.

4.2.3.1 Visual examination. The end item shall be examined for defects in table III. The inspection level shall be level II, with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE III. Visual examination

Examine	Defect	Classification Major	Minor
Finish	Not zinc coated	101	
	Area of no coating	102	
	Contains lumps, blisters, gritty areas, black spots, dross, or flux		201
Design, construction and workmanship	Not as specified	103	
	Part not as specified		202
	Dented, buckled, warped, or bent out of shape		203

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE III. Visual examination (cont'd)

Examine	Defect	Classification Major	Classification Minor
Design, construction and workmanship (cont'd)	Component missing (except rivets) or in wrong location	104	
	Broken, fractured, or cracked	105	
	Sharp projection, tear, or edge	106	
	Can lopsided		204
	Not rigid, or shape does not permit nesting (i.e., each size with cover within the next larger size)	107	
	Does not nest evenly, or does not rest on body handles when partially nested without covers (size 16-gallon and larger	108	
Welding or rivet	Omitted; not fused, broken, or burned through	109	
	Weld pitted or flash or spatter not removed; rivet not set		205
Bodies	Not two equal pieces of steel		206
	Two horizontal corrugations missing near top		207
	Quantity of vertical corrugations not as specified		208
	Horizontal corrugation at top edge of bottom band missing		209
	Side joints not a grooved seam		210
	Band at top or bottom missing	110	
	Top and bottom band(s) assembly not riveted or welded	111	
	Hole or open seam	112	
Bottoms	Not one piece of steel	113	
	Corrugations or concaving, as applicable, missing		211
	Edge not turned down over bottom band	114	
	Edge not double seamed with the body	115	
	Hole or open seam	116	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE III. Visual examination (cont'd)

Examine	Defect	Classification Major	Classification Minor
Covers	Not one piece		212
	Concentric offsets missing		213
	Not concave shape	117	
	Do not fit can, as applicable	118	
	Will not nest	119	
	Beaded edge missing	120	
Clips	Cover handle clips not as specified		214
	One or more spot welds or rivets missing (when applicable)	121	
Handle	Cover handle not as specified		215
Bail and body clips	Not formed to fit body		216
	One or more rivets missing (when applicable)	122	
	One or more spot welds missing (when applicable)	123	
	Not centered over body seams	124	
Bails 5- and 10-gallon cans	Not as specified		217
	Do not lock cover in place when in carrying position		218
Body handles 16-, 24-, and 33-gallon cans	Not drop type	125	
Rivets	Rivet missing, not peened, or head broken off	126	
	Rivets on top and bottom band not equally spaced or not type specified		219
Identification marking	Missing, illegible, incomplete, incorrect, wrong size, or location		220
	Not embossed		221

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

4.2.3.2 Examination for defects in dimensions. Examination shall be made of the cans and covers for defects in dimensions. Any dimension that is not within the specified requirements shall constitute a defect. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

4.2.3.3 End item testing. Cans or covers, as applicable, shall be tested in accordance with table IV for the characteristics shown therein. Any non-conformance with specified requirements shall constitute a defect. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

TABLE IV. End item testing

Characteristic	Requirement paragraph	Test procedure	Sample unit	Inspection
Drop and leakage	3.4	4.3.2	One can	Pass or fail
Clips, bails and handles	3.4	4.3.3	One can or cover	Pass or fail
Salt spray	3.6	4.3.4	One can or cover	Pass or fail

4.2.3.4 Examination of preparation for delivery requirements. Examination of preparation for delivery shall be made in accordance with the quality assurance provisions in PPP-P-130.

4.3 Tests.

4.3.1 Seaming compound tests. The seaming compound shall be spread and dried as a thin film on tin plate and exposed to a temperature of +212°F ± 5°F for 40 hours. Evidence of flowing shall constitute failure of this test. The test shall be repeated at a temperature of -40°F ± 5°F. The tin plate shall be bent back on itself so that the coating is on the outer surface. Evidence of cracking or brittleness shall constitute failure of this test.

4.3.2 Drop test. The finished can shall be inverted with bail secured and dropped from a height of 40 inches on each quadrant of the top (four drops) onto a concrete floor or steel plate. The can shall then be loaded with the applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

weight specified in table II and dropped from a height of 40 inches on each quadrant of the bottom onto a concrete floor or steel place. Any deformation in excess of 1 inch constitutes failure of this test. The can shall then be filled with water to within 1/2 inch of the top and allowed to stand for 24 hours and then examined. Leakage in excess of the amounts specified in table II shall constitute failure of this test.

4.3.3 Clips, bails, and handle tests. The can shall be loaded with the applicable weight specified in table II and lifted by the bail or handles not less than 6 inches, and suspended for 30 minutes. The clips and handle or bail, as applicable, shall be examined. Any clip, bail or handle looseness, pull-away, or deformation shall constitute failure of this test.

4.3.4 Salt spray tests. The cans or cover, as applicable, shall be subjected to a 96-hour salt spray test in accordance with ASTM B 117. No areas or edges of the cans or covers shall be protected during this test. Evidence of corrosion on the base metal or plating shall constitute failure of this test.

5. PREPARATION FOR DELIVERY

5.1 Packing and marking. Packing and marking for level A, B, or C shall be in accordance with PPP-P-130 (see 6.2).

6. NOTES

6.1 Intended use. The cans are intended to be used as containers for garbage and rubbish. The 32-gallon capacity can may be used to heat potable water for food service utensil washing and sanitizing under emergency or field conditions.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Size of can or cover required (see 1.2).
(c) Selection of applicable level of packing and marking required (see 5.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.


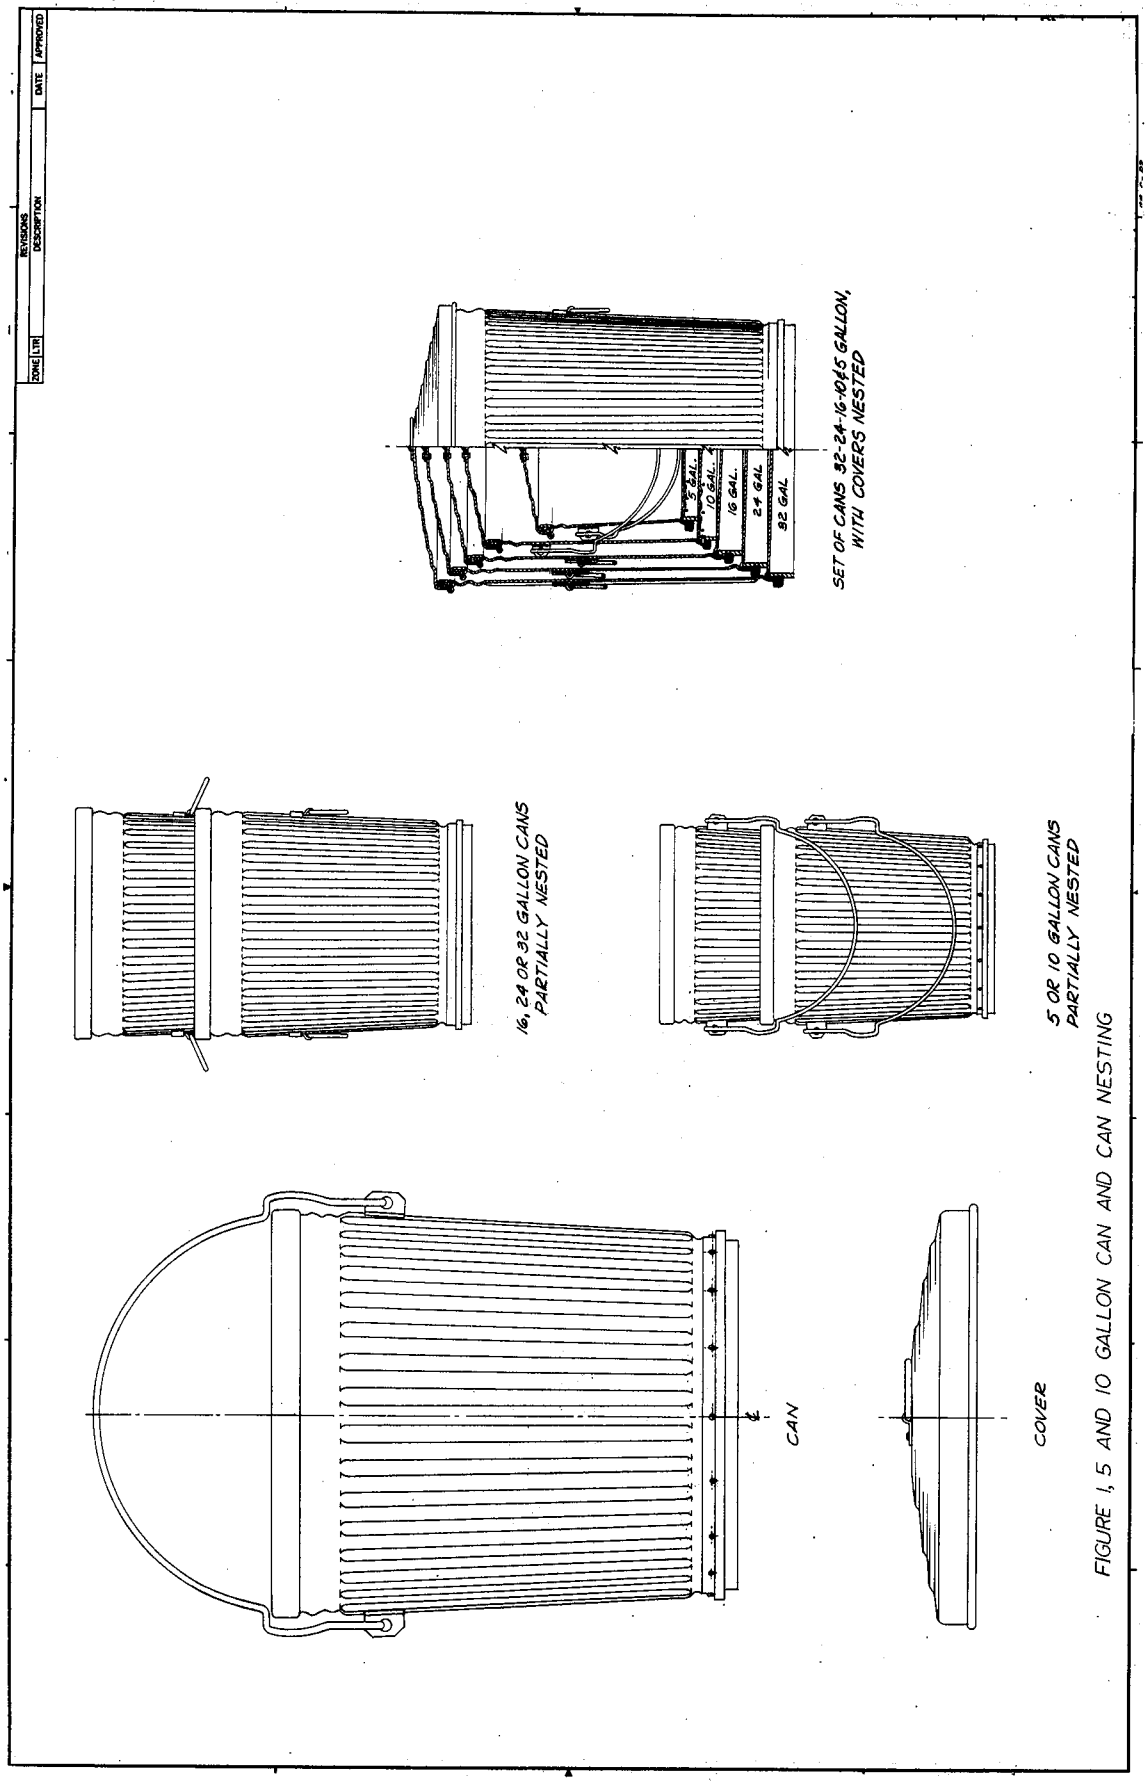


FIGURE 1, 5 AND 10 GALLON CAN AND CAN NESTING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

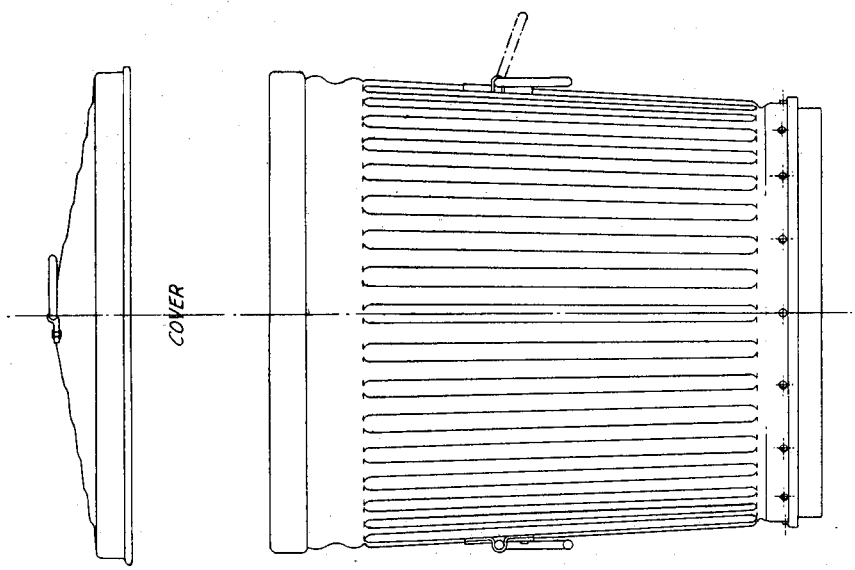

16, 24 AND 32 GALLON CANS

FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

MILITARY CUSTODIANS:

Army - GL
Navy - YD
Air Force - 99

Review activity:

Army - MD

User activities:

Army - CE, SM

CIVIL AGENCY COORDINATING ACTIVITIES:

AGR - AFS
GSA - FSS

PREPARING ACTIVITY: ARMY - GL

Project No. 7240-0163

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 35 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.