RR-L-30a
October 20, 1967
SUPERSEDING
Fed. Spec. RR-L-30
March 8, 1963

FEDERAL SPECIFICATION

LADLES, KITCHEN, (CORROSION-RESISTING STEEL)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers one type of corrosion-resisting steel kitchen ladles.

1.2 Classification. The kitchen ladles covered by this specification shall be of the following sizes, as specified (see 6.2):

Size a - 2-ounce capacity.
Size b - 4-ounce capacity.
Size c - 6-ounce capacity.
Size d - 8-ounce capacity.
Size e - 12-ounce capacity.
Size h - 72-ounce capacity.
Size aa - 1-ounce capcity.

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following specifications and standards, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

PPP-B-566 - Boxes, Folding, Paperboard.
PPP-B-636 - Box, Fiberboard.
PPP-B-676 - Boxes, Setup.

Federal Standard:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:08Z
Check the source to verify that this is the current version before use.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C., 20402.)

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-130 - Identification Marking of U.S. Military Property.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bid or request for proposal shall apply.

American Society for Testing and Materials (ASTM) Publication:

A 167 - Corrosion-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip.

(Application for copies should be addressed to the American Society for Testing and Materials; 1916 Race Street, Philadelphia, Pa., 19103).

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:08Z
Check the source to verify that this is the current version before use.

National Sanitation Foundation (NSF) Standard:

Food Service Equipment and Appurtenances

"Seal of Approval Listing of Food Service Equipment" Catalog.

(Application for copies should be addressed to the National Sanitation Foundation; P.O. Box 1468; Ann Arbor, Michigan, 48106).

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal Agencies.)

3. REQUIREMENTS

3.1 Preproduction sample. When specified (see 6.2), before production is commenced, a sample item covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Standard product. The ladles delivered under this specification shall be the manufacturer's standard commercially current product, except for any changes necessary to comply with specification requirements.

3.3 Standard compliance. The ladles covered by this specification shall conform to the applicable requirements of the National Sanitation Foundation (NSF) Standard No. 2.

3.3.1 NSF certification. Prior to approval of the preproduction sample, if one is submitted, or prior to approval of the first shipment, the supplier shall submit satisfactory evidence to the contracting officer or his authorized representative that the ladles he proposes to supply under this specification meet the applicable requirements of NSF Standard No. 2. Acceptable evidence of meeting the applicable requirements of this standard shall be an NSF seal; a listing in the "Seal of Approval Listing of Food Service Equipment" catalog, or a certified test report from a recognized independent testing laboratory acceptable to the medical department of the procuring service, indicating that the ladles offered conform to the applicable requirements of NSF Standard No. 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

3.4 Materials. Materials not definitely specified shall be of the quality used in the manufacturer's standard product. Unless otherwise specified herein, commercial tolerances are applicable to all material thicknesses.

3.4.1 Steel, sheet and strip corrosion-resisting. The corrosion-resisting steel sheet or strip shall conform to type 301, 302, or 304 steel specified in ASTM A 167.

3.5 Design and construction. The ladles, consisting of a body and a handle, shall be fabricated from corrosion-resisting steel and shall conform to the dimensions shown on figure 1.

3.5.1 Body. The ladle body shall be formed without seams from a single piece of corrosion-resisting steel specified in 3.4.1.

3.5.2 Handle. The handle shall be fabricated of corrosion-resisting steel specified in 3.4.1 The handle shall be spot or fillet welded to the body. When the body and handle are secured by fillet welding, the welding rod shall have the same chemical composition as the welded material. When the handle is spotwelded to the body, a minimum of three spot welds shall be used. The weld shall be such that a weighted handle shall not separate from the body when tested as specified in 4.9.1.

3.6 Welding. All surfaces to be welded shall be clean. Welding shall be accomplished in such a manner which will prevent the occurrence of burn holes, fractures, undercuts, weld metal or base metal cracks, incomplete fusion, or slag inclusion. The welds shall be sound and smooth, and shall blend into the contour of the handle, and there shall be no evidence of grind marks, discoloration. All scale or flux deposits shall be removed from the finished welds.

3.7 Finish. After fabrication and removal of all rough and sharp edges which might be injurious to the hands, the ladles shall be given a No. 2B, 3 or 4 commercial finish on all surfaces. The surfaces of the finished ladles shall be free from discoloration, rust, pits, or stains.

3.8.1

3.8 Marking for identification. Each ladle handle shall be permanently marked with the capacity in ounces (oz.) and the manufacturer's name or trademark of such known character as to be readily identifiable with the manufacturer. In addition, for Military procurements the ladles shall be permanently stamped in accordance with MIL-STD-130 with the letters U.S. of the size and

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

location specified on figure 1. The surface opposite the stamp markings shall show no signs of penetration or unevenness, nor shall the stamp marking cause distortion of any part of the handle.

3.9 Workmanship. The finished ladles shall be clean and shall not contain any burrs, slivers, or sharp edges; rough die, tool, gouge or grind marks. The finished ladles shall not be fractured, buckled, dented, bent, punctured, malformed or damaged.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsiblity for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection. When a preproduction sample is required, it shall be examined for defects listed in table I and dimensions specified, and tested as specified in 4.9.1.

4.3 Component and material inspection. In accordance with 4.1 above, the components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.4 Sampling. Sampling for inspection shall be made in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated hereinafter.

4.5 End product inspection. The inspection lot shall be the number of ladles of one size offered for inspection at one time. The sample unit for this inspection shall be one completely fabricated ladle.

4.5.1 Visual examination. Examination shall be made of the end item for defects classified in table I. The inspection level shall be level II, with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects

Examine	Defect	Classification	
		Major	Minor
Finish	Not a no. 2B, 3 or 4 commercial finish		X
	Evidence of discoloration, rust, pits, or stains	X	
Construction and workmanship (applicable to all components and assemblies)	Any burrs, slivers, or sharp edges rough die, tool, gouge, or grind marks	X	
	Any component fractured, buckled, bent, dented, punctured, malformed, or damaged	X	
	Any component not fabricated of the specified materials (when not covered by referenced specifications)	X	
Welding	Weld not as specified or not fused	X	
	Scale or flux deposits not removed		X
	Any evidence of burn holes, fractures, undercuts, weld metal or base metal cracks, incomplete fusion or slag inclusion	X	
	Fusion weld (when applicable) not sound, smooth and doesn't blend into the contour of the handle		X
	Spot weld (when applicable) missing, broken or burned through, pits or flashes	X	
Identification marking	Missing, incomplete, illegible; not proper location		X
	Surface opposite marking shows penetration or unevenness		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

4.5.2 Dimensional examination. Inspection shall be made of the sample unit to determine compliance with dimensions specified. Any deviation from specified requirements shall constitute a defect. The inspection level shall be level S-2 and the AQL shall be 4.0 defects, expressed in terms of defects per hundred units.

4.6 Testing of the end item. The end item shall be tested as specified in 4.9.1. The inspection level shall be S-2 with an AQL of 6.5 defects, expressed in terms of defects per hundred units.

4.7 Standard compliance. Proof of compliance with the requirements of 3.3 shall be made available to the Government representative.

4.8 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing, and marking as required by section 5 of this specification are complied with. Defects shall be scored in accordance with defects set forth in table II. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of containers offered for delivery at one time. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

TABLE II. Examination of preparation for delivery

Examine	Defect
Markings (exterior and interior container)	Missing, incorrect, illegible, of improper size, location, sequence or method of application
Materials	Component missing, damaged, or otherwise defective
Contents (interior)	More or less than required

4.8.1 Examination of shipping containers. When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure, waterproofing, and strapping shall be in accordance with PPP-B-636.

4.9 Test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

4.9.1 Weld test. The body of the ladle shall be securely clamped, so that the handle is in a horizontal position. The weights for each size ladle specified in table III below, shall be suspended from the hole of the handle for not less than 5 minutes to determine compliance with weld strength requirement in 3.5.2.

TABLE III. Weight for weld test

Ladle Sizes	Weight (pounds)
a	3
b	5
c	5
d	5
e	5
h	8
aa	1.5

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Ladles of one size only, shall be packaged in the most compact manner in quantities as specified in table IV, in a snug-fitting folding or set-up paperboard box or fiberboard box conforming to variety 1, style II, type A, class a or style III or VIII, type B, class a of PPP-B-566; or type I, variety I, class C, style 4 of PPP-B-676; or style RSC, type SF, variety optional, or type SF, class domestic of PPP-B-636. Tissue paper shall be used to immobilize the ladles during transit. Each box shall be closed in accordance with the appendix of the applicable box specification.

TABLE IV. Packaging and packing of ladles

Size	Quantity per package	Quantity per shipping container
a	6	144
b	6	144
c	6	144
d	6	72
e	6	72
h	3	24
aa	6	144

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

5.1.2 Level C. Ladles shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice, when it meets this requirement.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A. Ladles of one size only, packaged as specified in 5.1, shall be packed in the quantities as specified in table IV, in a snug-fitting fiberboard shipping container conforming to style RSC, V2s or PPP-B-636. Each shipping container shall be closed, waterproofed by means of tape and reinforced with flat strapping or tape banding in accordance with the appendix of PPP-B-636.

5.2.2 Level B. Unless otherwise specified (see 5.2.2.1), ladles of one size only, packaged as specified in 5.1, shall be packed in the quantities as specified in table IV, in a snug-fitting fiberboard shipping container conforming to style RSC, type CF, variety SW, or type SF, class domestic of PPP-B-636. Each shipping container shall be closed in accordance with method II of the appendix of PPP-B-636.

5.2.2.1 When specified (see 6.2), shipping containers shall be V3c or V3s, fabricated and closed in accordance with PPP-B-636.

5.2.3 Level C. Ladles packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 Marking.


5.3.1 Civil agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The ladles covered by this specification are intended for use in kitchens for serving or transferring food between containers.

Source: https://assist.dla.mil -- Downloaded: 20260-26T12:08Z
Check the source to verify that this is the current version before use.

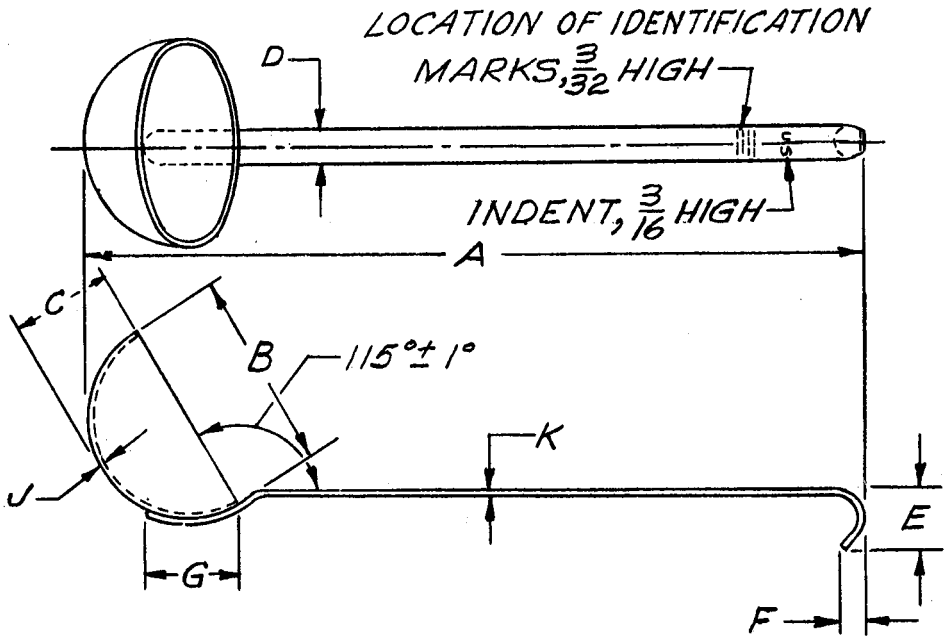

DIMENSIONS IN INCHES									
	A	B	C	D	E	F	G	MINIMUM THICKNESS	
								J BODY	K HANDLE
SIZE a	12 ± 1/2	2 3/8	1 1/4	15/32	1	5/8	3/4	.0312	.0781
SIZE b	12 ± 1/2	3 1/2	1 3/8	17/32	1 1/8	5/8	1	.0312	.0781
SIZE C	14 ± 1/2	3 5/8	1 5/8	9/16	1 1/8	5/8	1	.0312	.0781
SIZE d	15 ± 3/4	4	1 7/8	9/16	1 1/8	5/8	1 3/4	.0312	.0781
SIZE e	15 1/2 ± 3/4	4 13/32	2 13/64	5/8	1 3/16	5/8	1 3/4	.0500	.1094
SIZE h	20 ± 1	8 3/16	3 15/16	1	1 1/8	7/8	3 1/2	.0500	.1094
SIZE a a	8 3/8 ± 1/2	1 11/16	1	9/8	1	1/4	7/16	.0312	.0781

NOTE:
DIMENSIONS B, C, D, E, F AND G SHALL HAVE TOLERANCES OF ± 1/8

FIGURE 1. Ladle, kitchen, corrosion resisting steel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification
(b) Sizes of ladles required (1.2)
(c) When preproduction sample is required (see 3.1)
(d) Selection of the applicable levels of packaging and packing (see 5.1 and 5.2)
(e) When V3c or V3s fiberboard shipping containers are required for level B shipment (see 5.2.2.1)

6.3 The size g 32-ounce capacity Ladle, Kitchen (Corrosion-Resisting Steel) has been deleted from this revision.

6.4 For civil agency procurements. When level B packaging is required for civil agency procurement the requirements in 5.1.1, level A packaging shall apply.

CUSTODIANS:

Army - GL
Navy - SA
Air Force - 84

Preparing activity:

Army - GL

Review activities:

Army - MD
Navy - SA, MC
Air Force - 45, 84 and 85

User activities:

Navy - YD, MS, CG

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.