RR-L-30B
June 11, 1971
SUPERSEDING
Fed. Spec. RR-L-30A
October 20, 1967

FEDERAL SPECIFICATION

LADLES, KITCHEN (CORROSION-RESISTING STEEL)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers one type of corrosion-resisting steel kitchen ladles.

1.2 Classification. The kitchen ladles covered by this specification shall be of the following sizes, as specified (see 6.2):

Size a - 2-ounce capacity.
Size b - 4-ounce capacity.
Size c - 6-ounce capacity.
Size d - 8-ounce capacity.
Size e - 12-ounce capacity.
Size h - 72-ounce capacity.
Size aa - 1-ounce capacity.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

PPP-B-566 - Boxes, Folding, Paperboard.
PPP-B-636 - Box, Fiberboard.
PPP-B-676 - Boxes, Setup.

FSC 7330

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

Federal Standard:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Forth Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications. Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	-	Marking for Shipment and Storage.
MIL-STD-130	-	Identification Marking of U.S. Military Property.
MIL-STD-147	-	Palletized and Containerized Unit Loads, 40" x 48" Pallets, Skids, Runners, or Pallet-Type Base.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:08Z
Check the source to verify that this is the current version before use.

American Society for Testing and Materials (ASTM) Specification:

A167-69 - Corrosion-Resisting Chromium-Nickel Sheet, and Strip

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pa. 19103.)

National Sanitation Foundation (NSF):

Standard No. 2 - Food Service Equipment

Listing of Food Service Equipment

(Application for copies should be addressed to the National Sanitation Foundation, P.O. Box 1468, Ann Arbor, Michigan 48106.)

National Motor Freight Traffic Association, Inc., Agent:

National Motor Freight Classification

(Application for copies should be addressed to the National Motor Freight Traffic Association, Inc., Agent, 1616 P Street, N. W., Washington, DC 20036.)

Uniform Classification Committee, Agent:

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Tariff Publishing Officer, Room 202 Union Station, 516 W. Jackson Blvd., Chicago, IL 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Standard product. The ladles delivered under this specification shall be the manufacturer's standard commercial product, except for any changes necessary to comply with this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

3.2 Standard compliance. The ladles covered by this specification shall conform to the applicable requirements of NSF Standard No. 2.

3.2.1 NSF certification. The supplier shall submit satisfactory evidence to the contracting officer or his authorized representative that the ladles he proposes to furnish under this specification meet the applicable requirements of NSF Standard No. 2 as follows:

(1) A listing in the current edition of the NSF "Listing of Food Service Equipment" or display of the NSF seal on the finished ladle shall be submitted prior to approval of the first shipment, or

(2) A certification for the ladle issued by NSF under their special one-time contract evaluation/certification service shall be submitted prior to approval of the first shipment, or

(3) A certified test report from a recognized independent testing laboratory acceptable to the medical authority functioning in advisory capacity to the preparing agency of the specification, indicating that the ladles have been tested and conform to NSF Standard No. 2, shall be submitted prior to commencing production.

3.3 Materials. Materials not definitely specified shall be of the quality normally used by the manufacturer for his commercial kitchen ladles, provided the completed items comply with all provisions of this specification. Unless otherwise specified herein, commercial tolerances are applicable to all material thicknesses.

3.3.1 Steel sheet and strip, corrosion-resisting. Corrosion-resisting steel sheet and strip shall conform to the chemical composition of type 301, 302, or 304 as specified in ASTM A167.

3.4 Design and construction. The ladles, consisting of a body and a handle, shall be fabricated from corrosion-resisting steel specified in 3.3.1 and shall conform to the dimensions shown on figure 1.

3.4.1 Body. The ladle body shall be formed without seams from a single piece of corrosion-resisting steel specified in 3.3.1.

3.4.2 Handle. The handle shall be fabricated of corrosion-resisting steel specified in 3.3.1. The handle shall be spot or fillet welded to the body. When the body and handle are secured by fillet welding, the welding rod shall have the same chemical composition as the welded material. When the handle is spotwelded to the body, a minimum of three spot welds shall be used and the joint sealed all around with solder. The weld shall be such that a weighted handle shall not separate from the body when tested as specified in 4.5.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

3.5 Welding. All surfaces to be welded shall be clean. Welding shall be accomplished in a manner to prevent the occurrence of burn holes, fractures, undercuts, weld metal or base metal cracks, incomplete fusion, or slag inclusion. Welds shall be sound and smooth and shall blend into the contour of the handle. There shall be no grind marks or discoloration. All scale and flux deposits shall be removed from the finished welds. Soldered joints shall be free of pinholes.

3.6 Finish. Ladles shall be given a No. 3, or smoother, commercial finish on all surfaces. The surfaces of the finished ladles shall be free from discoloration, rust, pits, or stains.

3.7 Marking for identification. Each ladle handle shall be permanently marked with the capacity in ounces (oz.) and the manufacturer's name or trademark of such known character as to be readily identifiable with the manufacturer.

3.7.1 Military agencies. In addition, for Military procurements the ladles shall be permanently stamped in accordance with MIL-STD-130 with the letters U.S. of the size and location specified on figure 1. The surface opposite the stamp markings shall not show signs of penetration or unevenness, and shall not distort the handles.

3.8 Workmanship. The finished ladles shall be clean and shall not contain any burrs, slivers, sharp edges, or rough die, tool, gouge, or grind marks. The finished ladles shall not be fractured, buckled, dented, punctured, or otherwise malformed or damaged.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

4.2.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.2.2 End item inspection. The inspection lot shall be the number of ladles of one size offered for inspection at one time. The sample unit for this inspection shall be one completely fabricated ladle.

4.2.2.1 Visual examination. Examination shall be made of the end item for defects in table I. The inspection level shall be level II, with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE I. Classification of defects

Examine	Defect	Classification	
		Major	Minor
Finish	Not a No. 3 or smoother commercial finish		X
	Evidence of discoloration, rust, pits, or stains	X	
Construction and workmanship (general)	Any burrs, slivers, sharp edges, or rough die, tool, gouge, or grind marks	X	
	Any component fractured, buckled, dented, punctured, malformed, or damaged	X	
	Any component not fabricated of the specified materials	X	
Welding	Weld not as specified or not fused	X	
	Scale and flux deposits not removed		X
	Any evidence of burn holes, fractures, undercuts, weld metal or base metal cracks, incomplete fusion, or slag inclusion	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (con.)

Examine	Defect	Classification Major	Minor
Welding (cont'd)	Fusion weld (when applicable) not sound and smooth and doesn't blend into the contour of the handle	X	
	Spot weld (when applicable) missing, broken, or burned-through; pits or flashes	X	
Soldering	Pinholes		X
Identification marking	Missing, incomplete, illegible, not proper location		X
	Surface opposite marking shows penetration or unevenness		X

4.2.2.2 Dimensional examination. Inspection shall be made of the sample unit to determine compliance with dimensions specified. Any deviation from specified requirements shall constitute a defect. The inspection level shall be level S-2 and the AQL shall be 4.0 defects, expressed in terms of defects per hundred units.

4.2.2.3 Testing of the end item. The end item shall be tested as specified in 4.5.1. The inspection level shall be S-2 with an AQL of 6.5 defects, expressed in terms of defects per hundred units.

4.3 Standard compliance. Proof of compliance with the requirements of 3.2 shall be submitted to the Government representative.

4.4 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing, and marking as required by section 5 of this specification are complied with. Defects shall be as indicated in table II. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE II. Examination of preparation for delivery

Examine	Defect
Markings (exterior and interior container)	Missing; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Component missing, damaged, or otherwise defective
Contents (interior)	More or less than required

4.4.1 Examination of shipping containers. When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure, waterproofing, and strapping shall be in accordance with PPP-B-636.

4.4.2 Examination of palletization. An examination shall be made to determine that palletization is in compliance with section 5 of this specification. Defects shall be as indicated in table III. The sample unit for this examination shall be one palletized unit load ready for shipment. The lot shall be the number of palletized unit loads submitted for inspection at one time. The inspection level shall be S-1 with an AQL of 6.5 expressed in terms of defects per hundred units.

TABLE III. Examination of palletization

Examination	Defect
Finished dimension	Length, width, or height exceeds specified maximum requirement
Palletization	Not as specified Pallet pattern not as specified Interlocking of loads not as specified
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

4.5 Tests.

4.5.1 Weld test. The body of the ladle shall be securely clamped so that the handle is in a horizontal position. The weight for each size ladle specified in table IV below, shall be suspended 1-1/2 inches from the curved end of the handle for not less than 5 minutes to determine compliance with weld strength requirements of 3.4.2. Any nonconformance shall constitute failure of this test.

TABLE IV. Weight for weld test

Ladle size	Weight (pounds)
a	3
b	5
c	5
d	5
e	5
h	8
aa	1.5

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Ladles of one size only, shall be packaged in the most compact manner in the quantities specified in table V, in a snug-fitting folding or set-up paperboard box or fiberboard box conforming to variety 1, style II, type D, class 2, or style III or VIII, type G, class 1 of PPP-B-566; or type I, variety 1, class C, style 4 of PPP-B-676; or style RSC, type CF, variety optional, or type SF, class domestic of PPP-B-636. Tissue paper shall be used to immobilize the ladles during transit. Each box shall be closed in accordance with the appendix of the applicable box specification.

TABLE V. Packaging and packing of ladles

Size	Quantity per package	Quantity per shipping container
a	6	144
b	6	144
c	6	144
d	6	72
e	6	72
h	3	24
aa	6	144

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

5.1.2 Level C. Ladles shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice, when it meets this requirement.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A. Ladles of one size only, packaged as specified in 5.1, shall be packed in the quantities specified in table V, in a snug-fitting fiberboard shipping container conforming to style RSC, V2s of PPP-B-636. Each shipping container shall be closed, waterproofed by means of tape, and reinforced with flat strapping or tape banding in accordance with the appendix of PPP-B-636.

5.2.2 Level B. Ladles of one size only, packaged as specified in 5.1, shall be packed in the quantities specified in table V, in a snug-fitting fiberboard shipping container conforming to style RSC, type CF, variety SW, or type SF, class domestic of PPP-B-636. Each shipping container shall be closed in accordance with method II of the appendix of PPP-B-636.

5.2.2.1 When specified (see 6.2) the shipping container shall be V3c, V3s, or V4s, fabricated and closed in accordance with PPP-B-636.

5.2.3 Level C. Ladles, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules as applicable.

5.3 Palletization, (Military requirements). Unless otherwise specified (see 6.2) ladles packed as specified shall be palletized in accordance with Load Type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

5.4 Marking. Marking shall be in accordance with 5.4.1 or 5.4.2, as specified (see 6.2).

5.4.1 Civil agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

5.4.2 Military agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The ladles covered by this specification are intended for use in kitchens for serving or transferring food between containers.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents.

(a) Title, number, and date of this specification.
(b) Size of ladle required (see 1.2).
(c) Selection of the applicable levels of packaging and packing (see 5.1 and 5.2).
(d) When V3c, V3s, or V4s fiberboard shipping containers are required for level B shipment (see 5.2.2.1).
(e) Marking required (see 5.4).

6.3 For civil agency procurements. When level B packaging is required for civil agency procurement, the requirements in 5.1.1, level A packaging shall apply.

MILITARY CUSTODIANS:

Army - GL
Navy - SA
Air Force - 84

Review activities:

Army - MD
Navy - MS, MC

User activities:

Navy - YD, CG

Preparing activity:


Army - GL

CIVIL AGENCY INTEREST:

GSA-FSS
HEW
AGRI
VA

Project No. 7330-0381

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

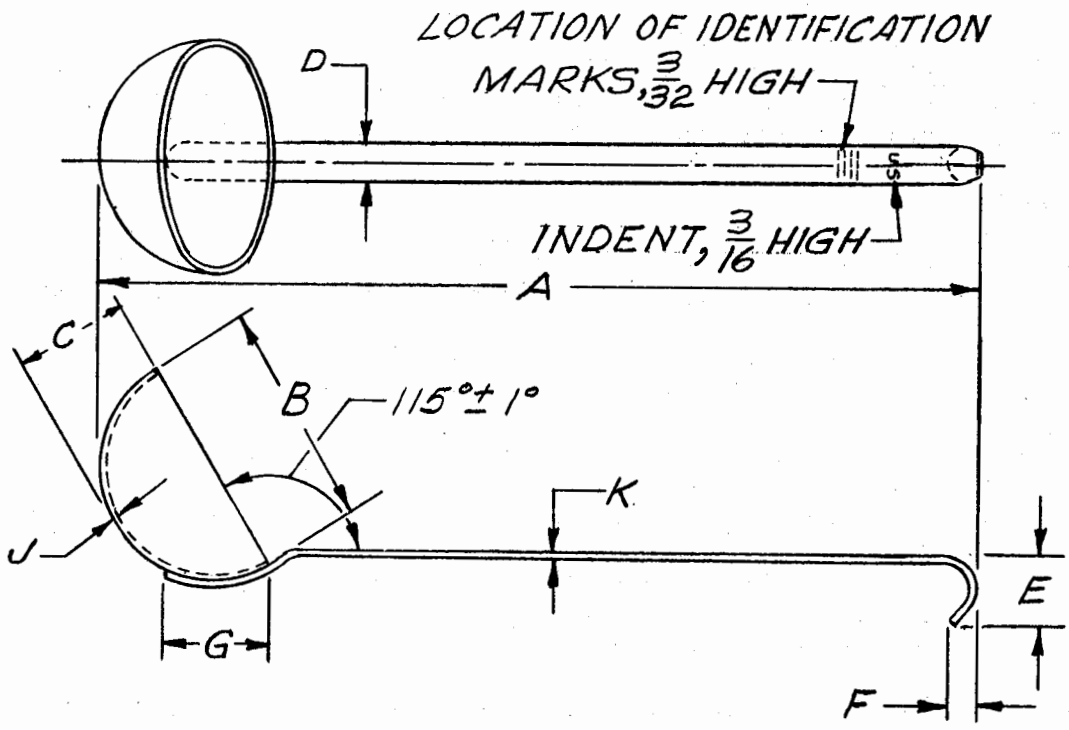

DIMENSIONS IN INCHES									
	A	B	C	D	E	F	G	MINIMUM THICKNESS	
								J BODY	K HANDLE
SIZE a	12 ± 1/2	2 3/8	1 1/4	15/32	1	5/8	3/4	.0312	.0781
SIZE b	12 ± 1/2	3 1/2	1 3/8	17/32	1 1/8	5/8	1	.0312	.0781
SIZE C	14 ± 1/2	3 5/8	1 5/8	9/16	1 1/8	5/8	1	.0312	.0781
SIZE d	15 ± 3/4	4	1 7/8	9/16	1 1/8	5/8	1 3/4	.0312	.0781
SIZE e	15 1/2 ± 3/4	4 13/32	2 13/64	5/8	1 3/16	5/8	1 3/4	.0500	.1094
SIZE h	20 ± 1	8 3/16	3 15/16	1	1 1/8	7/8	3 1/2	.0500	.1094
SIZE a a	8 3/8 ± 1/2	1 11/16	1	3/8	1	1/4	7/16	.0312	.0781

NOTE:

Dimensions B, C, D, E, F, and G shall have tolerances of ± 1/8.

FIGURE 1. Ladle, kitchen, corrosion resisting steel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION Ladles, Kitchen (Corrosionn-Resisting Steel) RR-L-30B

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: ~~AMXRES-EQS~~
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.