RR-P-58c
June 3, 1968
SUPERSEDING
Fed. Spec. RR-P-58b
October 14, 1963

FEDERAL SPECIFICATION

PANS, BREAD

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers an individual bread pan and bread pans assembled in sets of 3, 4, or 5 pans and treated with a silicone release coating.

1.2 Classification. Bread pan sets shall be of the following styles and sizes as specified (see 6.2). Sizes shown are top overall length by width by depth of the pan or pan sets, as applicable, in inches.

Style 1 - Individual bread pan (12-3/4 by 4-5/8 by 2-7/8).
Style 2 - Three pan set (15-3/4 by 17 by 3-1/2).
Style 3 - Four-pan sets.

Size 2 - 21-1/8 by 14-1/2 by 3-1/2.
Size 3 - 21-5/8 by 10-3/8 by 2-3/4.
Size 4 - 24-1/8 by 15-1/4 by 2-3/4 (Hearth pans).
Size 5 - 21-1/4 by 16-9/16 by 4 (Pullman pans).

Style 4 - Five-pan sets.

Size 1 - 27 by 14-1/2 by 3-1/2.
Size 2 - 28 by 11-1/2 by 3-1/2.

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following specifications and standards, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

FSC 7330

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

Federal Specifications:

QQ-S-698 - Steel, Sheet and Strip, Low Carbon.
PPP-B-576 - Box, Wood, Cleated, Veneer, Paper Overlaid.
PPP-B-591 - Boxes, Fiberboard, Wood-Cleated.
PPP-B-601 - Boxes, Wood, Cleated-Plywood.
PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636 - Box, Fiberboard.

Federal Standard:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, and Standards, at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office Washington, D.C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, and Standards, from established distribution points in their agencies.)

Military Specifications:

MIL-L-10547 - Liners, Case, and Sheet, Overwrap, Water-Vaporproof or Waterproof, Flexible.
MIL-G-51145 - Glazing Compound, Baking Pan.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-130 - Identification Marking of U. S. Military Property.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Department of Health, Education, and Welfare:

Food and Drug Administration.

Federal Food, Drug and Cosmetics Act.

Food Additive Amendment for Contact with Food.

(Application for copies should be addressed to Department of Health, Education, and Welfare, Food and Drug Administration, 330 Independence Ave., S. W., Washington, D. C. 20204)

Uniform Classification Committee:

Uniform Freight Classification Rules.

(Application for copies should be addressed to the Uniform Classification Committee, 202 Union Station, 516 W. Jackson Blvd., Chicago, Illinois 60606.)

American Trucking Associations, Inc:

National Motor Freight Classification Rules.

(Application for copies should be addressed to the American Trucking Associations, Inc., 1616 P Street, N. W., Washington, D. C. 20036).

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Preproduction sample. Unless otherwise specified (see 6.2), before production is commenced, a sample bread pan set covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

3.2 Standard product. The bread pans delivered under this specification shall be the manufacturer's commercial standard product, except for any changes necessary to comply with specification requirements.

3.3 Food standards. The materials used in the bread pans covered by this specification shall conform to the applicable requirements of the Federal Food, Drug, and Cosmetics Act, Food Additive Amendment, For Contact with Food.

3.3.1 Certification. Prior to the approval of the preproduction sample, or if none is submitted, prior to the approval of the first shipment, the supplier shall furnish the contracting officer or his authorized representative a certified statement that the materials used in the bread pans he proposes to supply under this specification comply with the applicable requirements of the Federal Food, Drug, and Cosmetics Act, Food Additive Amendment, For Contact with Food.

3.4 Materials. Materials not definitely specified shall be of the quality normally used for the purpose in the manufacturer's current, commercially available bread pans. Commercial tolerances shall apply to material thicknesses and diameters.

3.4.1 Carbon steel sheet. Carbon steel sheet shall be hot-rolled or cold-rolled, commercial quality, conforming to QQ-S-698.

3.4.2 Wire. Wire shall be standard commercial quality iron or steel wire.

3.4.3 Glazing compound. Glazing compound shall conform to the requirements of MIL-G-51145.

3.5 Design and construction. The bread pans shall consist of an individual bread pan or of bread pan sets of 3, 4, or 5 bread pans as specified (see 1.2), constructed as specified herein and as shown on figures 1 and 2.

3.5.1 Dimensions. The bread pans shall conform to the dimensions specified in tables I and II. Column letters correspond to the letter designations in figure 1, except style 3, size 4 which corresponds with figure 2. Tolerance for top spacing between pan sets shall be plus or minus 1/4 inch, except as specified in table II.

TABLE I. Dimensions - style 1, individual pan in inches

B	C	D	E	F	G	H
Top outside length ± 1/16	Outside depth ± 1/16	Bottom outside width ± 1/16	Bottom outside length ± 1/16	Top inside length ± 1/16	Top inside width ± 1/16	Top outside width ± 1/16
12-3/4	2-7/8	3-3/4	11-3/4	12-1/4	4-1/4	4-5/8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE II. Dimensions - pan sets in inches

Style	Size	Number of pans in set	A Top outside length of set ± 1/8	B Top outside width of set ± 1/8	C Vertical outside depth of set ± 1/16	D Bottom outside width of pan ± 1/16	E Bottom outside length of pan ± 1/16	F Top inside length of pan ± 1/16	G Top inside width of pan ± 1/16	Top Spacing between pans
2	--	3	15-3/4	17	3-1/2	4	16	16-1/2	4-1/2	1/2
3	2	4	21-1/8	14-1/2	3-1/2	4	13-1/2	14	4-1/2	1/2
3	3	4	21-5/8	10-3/8	2-3/4	3-1/2	9-1/8	9-7/8	4-1/4	1
3	4	4	24-1/8	15-1/4	2-3/4	*	14-1/16	14-5/8	5	5/8 (min.)
3	5	4	21-1/4	16-9/16	4	3-3/4	15-3/4	16	4	1
4	1	5	27	14-1/2	3-1/2	4	13-1/2	14	4-1/2	1/2
4	2	5	28	11-1/2	3-1/2	4-1/2	10	11	5	*

* Manufacturer's standard.

Source: https://assist.dla.mil. Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

3.5.2 Pans. The pans shall be fabricated from one piece of the carbon steel sheet specified in 3.4.1 with a nominal thickness of 0.0239 inch and shall have uncut folded corners and wire bead top edges. Wire bead edges shall be as specified in 3.5.5.

3.5.3 Style 3, size 3. When style 3, size 3 pan sets are intended for use in peel ovens (see 6.2), they shall be provided with protective plates or shock absorbers to protect against end damage from the peel. Plates shall be formed from nominal 0.048 inch thick carbon steel specified in 3.4.1, and shall be securely attached to the end pans and the straps at each end of each pan set. Four separating lugs located in accordance with the manufacturer's standard practice shall be provided. Each separating lug shall be formed as an integral part of the strapping and shall keep the pan sets separated by 1 $\pm$ 1/4 inch at all sides.

3.5.4 Style 3, size 4 (hearth pans). Pan sets shall have a minimum of two spacers between individual pans. Spacers shall be fabricated of nominal 0.207 inch diameter steel or iron wire specified in 3.4.2. The spacers shall be welded to the wire frame of the pan. The liner shall be steel and shall be perforated in accordance with the manufacturer's standard practice. The liner shall have curved side walls and shall be flared as shown in section A-A on figure 2. The end panels and the two top sides shall be wrapped around an iron or steel wire, and butt-welded. Strapping, as specified in 3.5.6, shall encircle the pan-set just below the wire bead.

3.5.5 Wire bead. All pans shall be provided with a top edge wire bead encircling the entire pan. The wire bead for all pans, except style 3, sizes 4 and 5, shall be nominal 0.1483-inch diameter. The wire bead for the style 3, size 4 and 5 pans shall be nominal 0.207 inch diameter.

3.5.6 Strapping. All pan sets shall be provided with steel strapping formed of the carbon steel sheet specified in 3.4.1. The steel strapping shall completely surround the entire pan set just below the wire bead. All pans, except style 3, size 4, shall be securely joined to the strapping at the pan ends in accordance with the manufacturer's standard practice. Strapping may be provided with or without a top and bottom channel bead. When no top and bottom channel bead is provided, the strapping shall be not less than 0.061 inch thick and not less than 1-1/2 inches wide. When a top and bottom channel bead is provided, the strapping shall be not less than 0.048 inch thick and not less than 1-3/8 inches wide. Strapping bands shall have an embossed or extruded offset or other suitable provision to prevent sets of pans from shifting when nested. Rivets shall pass through the external end folds (laps) of the pan only, or may pass entirely through the ends of of the pan, provided the rivet heads on the inside of the pan are thin, flat, and tight. Style 3, size 4 pans shall be securely held in place by spot-welding or projection welding, as shown on figure 2, or by riveting.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

Strapping for the style 3, size 4 pans shall be fabricated of cold rolled carbon steel sheet specified in 3.4.1 and shall be not less than 0.050 inch thick. The strapping shall be butted against the bottom of the pan bead as shown on figure 2.

3.5.7 Covers. The style 3, size 5 pans (Pullman) shall be provided with covers. The covers may be either an individual sliding-type for each pan or a drop-cover fitted over the entire set of pans. The drop covers shall have perforations above the spacings between the pans. The individual sliding covers shall be fabricated from the same material as the pans. The drop covers shall be fabricated of nominal 0.0299 inch thick black iron or aluminized steel.

3.6 Marking for identification. Each bread pan or pan set shall be marked with the manufacturer's name, trade name, or trademark of such known character easily identifiable with the manufacturer. Marking shall be applied in accordance with the applicable requirements of MIL-STD-130.

3.7 Finish. The exterior surfaces of the pans and covers shall be finished in accordance with the manufacturer's standard practice. The inside surfaces of the pans and covers shall be glazed with the glazing compound specified in 3.4.3.

3.8 Workmanship. The finished bread pans and covers shall be clean and free of imbedded foreign matter, rust, sharp or rough edges, dents, burrs, die marks, buckles, deformities, fractures, punctures, scale, and pits. Welds shall be sound, smooth, clean, and free of porosity and surface burns. All rivets shall be tight and the rivet heads shall be concentric and in full contact with the riveted metal surfaces.

4 QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection. When a preproduction sample is required, it shall be examined for the defects listed in table III and dimensions specified.

4.3 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

4.3.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.3.2 End product inspection. The lot shall consist of all pans or pan sets of one style and size, as applicable, offered for inspection at one time. The sample unit shall be one completely fabricated pan or pan set, as applicable.

4.3.2.1 Visual examination. Visual examination shall be made in accordance with the classification of defects in table III. The inspection level shall be level II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE III. Classification of defects

Examine	Defect	Classification	
		Major	Minor
Finish	Not in accordance with manufacturer's standard practice	X	
	Insides of pans or covers not glazed	X	
Construction and workmanship (General)	Rusty, imbedded foreign matter	X	
	Burrs, sharp edges	X	
	Die marks, dirty, dents over 1/16 inch deep	X	
	Scale, pits	X	
	Fractures, punctures, deformities	X	
	No provision on strapping band to prevent shifting when pans are nested (style 2,3, and 4 only)	X	
	Cover missing, (style 3, size 5 only)	X	
	Component missing, misaligned, or not securely fastened	X	
Welding	Not type specified, missing, not sound	X	
	Not clean, not smooth, porosity, surface burns		X
Rivets (when applicable)	Not type specified, missing, loose, not concentric and in full contact with riveted surfaces		X
Wire bead	Loose (top edge of pan not tightly rolled over wire)	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects (con.)

Examine	Defect	Classification	
		Major	Minor
Style 3, size 4	Liner not perforated	X	
Marking	Missing, not as specified		X

4.3.2.2 Dimensional examination. Dimensional examination shall be made to determine compliance with dimensions specified. Any noncompliance shall be considered a defect. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

4.3.3 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing, and marking comply with the requirements of section 5 of this specification. Defects shall be scored in accordance with table IV. The lot shall be the number of containers offered for delivery at one time. The sample unit shall be one shipping container fully prepared for delivery. The inspection level shall be S-4 with an AQL of 6.5, expressed in terms of defects per hundred units.

TABLE IV. Examination of preparation for delivery

Examine	Defect
Marking (exterior and interior)	Missing; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Components missing or damaged
Contents	Number per carton is not as specified

4.3.3.1 Examination of shipping containers. When shipping containers are required to be in accordance with PPP-B-601, PPP-B-591, PPP-B-576, or PPP-B-621, examination for defects in closure and strapping shall be in accordance with the applicable container specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

4.4 Standards compliance. Proof of compliance with the requirements of 3.3 shall be made available to the Government representative.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Bread pans with covers, or bread pans alone shall be packaged in the quantities specified in table V in the most compact manner in a snug-fitting fiberboard box conforming to style RSC, type CF, variety SW, or type SF, class domestic PPP-B-636. Each box shall be closed in accordance with the appendix of PPP-B-636.

5.1.2 Level C. Bread pans with covers or bread pans alone shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Bread pans with covers, or bread pans alone, packaged as specified in 5.1, shall be packed in the quantities specified in table V in a snug-fitting shipping container conforming to overseas type of PPP-B-601. Each shipping container shall be provided with a type I or II, grade C case liner conforming to MIL-L-10547. Closure and strapping shall be in accordance with PPP-B-601.

TABLE V. Packaging and packing of bread pans and covers

Style and size	Quantity per package	Quantity per shipping container
Style 1, individual pan	40	120
Style 2, three-pan set	*	12
Style 3, four-pan set		
Size 2	*	12
Size 3	12	24
Size 4	12	24
Size 5	12	24
Style 4, five-pan set		
Size 1	*	10
Size 2	*	10

* Packaging not required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. Bread pans with covers or bread pans alone, packaged as specified in 5.1, shall be packed in the quantities specified in table V in a snug-fitting shipping container conforming to domestic type, style A or B of PPP-B-601 or PPP-B-591; class 1 of PPP-B-576; or class 1, style 2 or 4 of PPP-B-621.

5.2.3 Level C. Bread pans with cover or bread pans alone, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers and packing shall comply with Uniform Freight Classification Rules, National Motor Freight Classification Rules, or, when applicable, to the parcel post regulations.

5.3 Marking.

5.3.1 Civil agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military requirements. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The bread pan sets covered by this specification are for use in bakeries. The style 3, size 3 pan sets are intended for baking normal round top loaves. Style 3, size 4 pans are intended for baking hearth type French and rye breads. Style 3, size 5 are intended for baking sandwich (Pullman) loaves.

6.2 Ordering data. Purchasers should select the perferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Style and size bread pan or bread pan set required (see 1.2).
(c) When a preproduction sample is not required (see 3.1).
(d) When style 3, size 3 pan sets are for use in peel ovens (see 3.5.6).
(e) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

6.3 Cross reference of classification. The type I, individual pan, type II, multiple pan, and the grade A-carbon steel and grade B-tinplate classifications specified in superseded RR-P-58b have been deleted from this specification. All pan sets covered by this specification are similar to the grade A-carbon steel pans of RR-P-58b. The type II, style 3 - four pan set, size 1 - 20 by 10-3/4 by 2-3/4 has also been deleted. Classification comparison between superseded RR-S-58b and this specification is as follows:

Classification comparison

RR-P-58b	RR-P-58c	Classification Change
Type I - individual pan	Style 1 - individual pan (12-3/4 by 4-5/8 by 2-7/8)	Reclassified
Size 1 - 12-3/4 by 4-5/8 by 2-7/8	None	Deleted
Type II - Multiple pans	Types deleted -(Styles only)	Deleted
Style 2 - three-pan set (15-3/4 by 17 by 3-1/2)	Style 2 - three-pan set (15-3/4 by 17 by 3-1/2)	None
Style 3 - four-pan set	Style 3 - four-pan set	None
Size 1 - 20 by 10-3/4 by 2-3/4	None	Deleted
Size 2 - 21-1/8 by 14-1/2 by 3-1/2	Size 2 - 21-1/8 by 14-1/2 by 3-1/2	None
Size 3 - 21-5/8 by 10-3/8 by 2-3/4	Size 3 - 21-5/8 by 10-3/8 by 2-3/4	None
Size 4 - 24-1/8 by 15-1/4 by 2-3/4 (Hearth pans)	Size 4 - 24-1/8 by 15-1/4 by 2-3/4 (Hearth Pans)	None
Size 5 - 21-1/4 by 16-9/16 by 4 (Pullman pans)	Size 5 - 21-1/4 by 16-9/16 by 4 (Pullman pans)	None
Style 4 - five-pan set	Style 4 - five-pan set	None
Size 1 - 27 by 14-1/2 by 3-1/2	Size 1 - 27 by 14-1/2 by 3-1/2	None
Size 2 - 28 by 11-1/2 by 3-1/2	Size 2 - 28 by 11-1/2 by 3-1/2	None
Grade A - carbon steel	One grade only - carbon steel	Deleted
Grade B - tinplate	None	Deleted

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

6.4 Level B civil agency packaging. When level B packaging is specified for civil agency procurement, the requirements of 5.1.1, level A packaging shall apply.

MILITARY CUSTODIANS:

Army - GL
Navy - SA
Air Force - 84

Review activities:

Army - MD
Navy - SA
Air Force - 84, 85

User activities:

Navy - YD, MC

Preparing activity:

Army - GL

CIVIL AGENCIES INTEREST:

GSA
HEW
VA

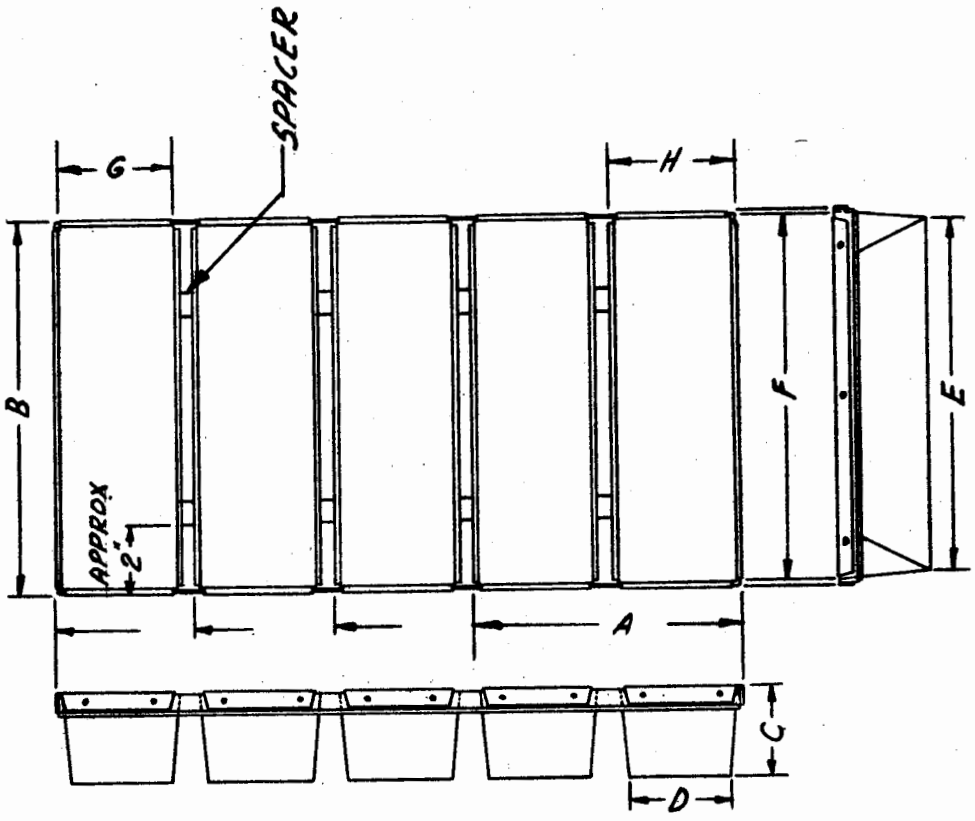


FIGURE 1. Pans, bread.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

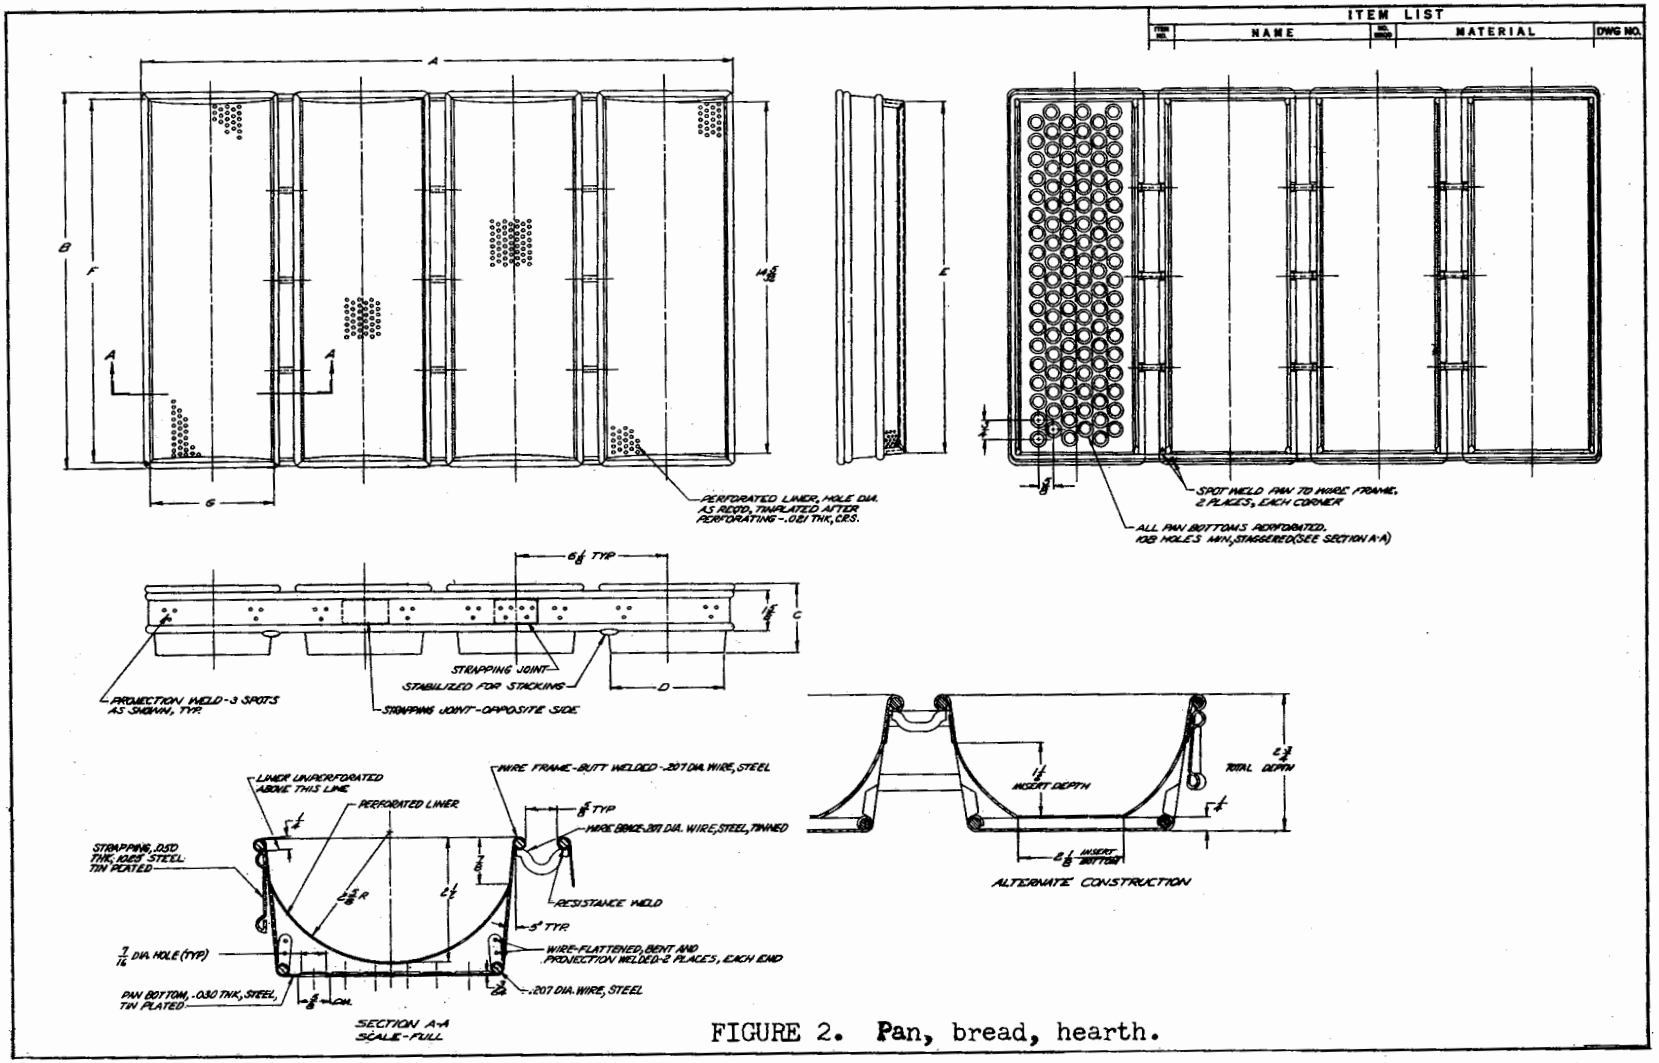


FIGURE 2. Pan, bread, hearth.

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 10 cents each.

Source: https://assistdocs.mil - Downloaded: 2020-10-29T12:08Z
Check the source to verify that this is the current version before use.

"to detach this form, cut along this line"

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

Pans, Bread - RR-P-58c

ORGANIZATION	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 OCT 64 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-QS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.