RR-P-58D
May 6, 1970
SUPERSEDING
Fed. Spec. RR-P-58C
June 3, 1968
(see 6.3)

FEDERAL SPECIFICATION

PANS, BREAD

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers an individual bread pan and bread pans assembled in sets of 3,4, and 5 pans and treated with glazing compound.

1.2 Classification. Bread pans shall be of the following styles, sizes, and grades as specified (see 6.2). Sizes shown are top overall length by width by depth of the pan or pan sets, as applicable, in inches.

Style 1 - Individual bread pan (12-3/4 by 4-5/8 by 2-7/8).
Style 2 - Three-pan set (15-3/4 by 17 by 3-1/2).
Style 3 - Four-pan sets.

Size 2 - 21-1/8 by 14-1/2 by 3-1/2.
Size 3 - 21-5/8 by 10-3/8 by 2-3/4.
Size 4 - 24-1/8 by 15-1/4 by 2-3/4 (Hearth pans).
Size 5 - 21-1/4 by 16-9/16 by 4 (Pullman pans).

Style 4 - Five-pan sets.

Size 1 - 27 by 14-1/2 by 3-1/2.
Size 2 - 28 by 11-1/2 by 3-1/2.

Grade A - Aluminized steel
Grade B - Tin plate

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

FSC 7330

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

Federal Specifications:

QQ-T-425	-	Tin plate (Hot Dip and Electrolytic).
QQ-W-461	-	Wire, Steel, Carbon, (Round, Bare, and Coated).
PPP-B-576	-	Box, Wood, Cleated, Veneer, Paper Overlaid.
PPP-B-591	-	Boxes, Fiberboard, Wood-Cleated.
PPP-B-601	-	Boxes, Wood, Cleated-Plywood.
PPP-B-621	-	Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	-	Box, Fiberboard.

Federal Standard:

FED-STD-123 - Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Forth Worth, Denver, San Francisco, Los Angeles, and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:

MIL-S-4174	-	Steel Sheet and Strip, Flat, Aluminum Coated, Low Carbon.
MIL-L-10547	-	Liners, Case, and Sheet, Overwrap, Water-Vaporproof or Waterproof, Flexible.
MIL-G-51145	-	Glazing Compound, Baking Pan.

Military Standards:

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	-	Marking for Shipment and Storage.
MIL-STD-130	-	Identification Marking of U.S. Military Property.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

DEPARTMENT OF HEALTH, EDUCATION AND WELFARE

FOOD AND DRUG ADMINISTRATION:

Federal Food, Drug, and Cosmetics Act, Food Additive Amendment, For Contact with Food

(Application for copies should be addressed to the Department of Health, Education, and Welfare, Food and Drug Administration, 330 Independence Ave., S.W., Washington, D.C. 20201.)

Uniform Classification Committee:

Uniform Freight Classification.

(Application for copies shall be addressed to the Uniform Classification, 202 Union Station, Chicago, Illinois 60606.)

National Classification Board:

National Motor Freight Classification.

(Application for copies shall be addressed to the American Trucking Associations, Inc., Attn: Tariff Order Section 1616 P Street, N. W. Washington, D. C. 20036.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 First article. Unless otherwise specified (see 6.2), before production is commenced, a preproduction sample individual bread pan or bread pan set being procured under this specification shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. Approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with the detailed provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

used for the manufacture of the production items. Whenever a material, design or construction change or deviation is made to the pan or pan sets after approval of the preproduction sample, the Government shall withhold acceptance of subsequent pans or pan sets incorporating those changes until a sample containing changes or deviations has been inspected and approved in accordance with 4.2; or the contracting officer has given written approval based on the evidence furnished that the changes or deviations made do not adversely affect the design and performance of the pan or pan sets. The preproduction unit shall be kept available during entire production and may be furnished as the last unit of the contract. However, before shipment the preproduction unit shall be reworked to meet all requirements of this specification.

3.2 Standard product. The bread pans delivered under this specification shall be the manufacturer's commercial standard product, except for any changes necessary to comply with specification requirements.

3.3 Food standards. The materials used in the bread pans covered by this specification shall conform to the applicable requirements of the Federal Food, Drug, and Cosmetics Act, Food Additive Amendment, For Contact with Food.

3.3.1 Certification. Prior to the approval of the preproduction sample, or if none is submitted, prior to the approval of the first shipment, the supplier shall furnish the contracting officer or his authorized representative a certified statement that the materials used in the bread pans he proposes to supply under this specification comply with the applicable requirements of the Federal Food, Drug, and Cosmetics Act, Food Additive Amendment, for Contact with Food.

3.4 Materials. Materials not definitely specified shall be of the quality normally used by the manufacturer for his pans and pan sets, provided the completed items comply with all provisions of this specification. Unless otherwise specified herein, commercial tolerances shall apply to material thicknesses and diameters.

3.4.1 Wire, steel, carbon. Carbon steel wire shall conform to the requirements for steel number 1010, 1015, or 1020, finish 3 of QQ-W-461.

3.4.2 Tin plate. Tin plate shall conform to QQ-T-425 and shall be type I, grade 3, class A bright finish; type I, grade 4, class 25, dull matte or bright finish; or type I, grade 4, class 100.

3.4.3 Aluminized steel, sheet or strip. Aluminized steel sheet or strip shall conform to type I, grade A or B of MIL-S-4174.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

3.4.4 Glazing compound. Glazing compound shall conform to the requirements of MIL-G-51145.

3.5 Design and construction. The pans and pan sets shall be designed and constructed as specified herein and as shown on figures 1 and 2. Figures 1 and 2 are for illustrative purposes only except for dimensional and material requirements shown thereon and are not intended to preclude procurement of pans or pan sets otherwise meeting all specification requirements. The grade A pans and pan sets shall be fabricated of aluminum coated steel specified in 3.4.3 and the wire specified in 3.4.1. The grade B pans and pan sets shall be fabricated of the tin plate specified in 3.4.2 and the wire specified in 3.4.1.

3.5.1 Dimensions. The pans and the pan sets shall conform to the dimensions specified herein, on figures 1 and 2, and as specified in tables I and II. Column designation letters in the tables correspond to the letter designation on figure 1, except style 3, size 4, which corresponds with figure 2. Tolerance for top spacing of the pans within a pan set shall be plus or minus 1/4-inch, except as specified in table II.

TABLE I. Dimensions - style 1, individual pan (inches)

B	C	D	E	F	G	H
Top outside length ± 1/16	Inside slope depth ± 1/16	Bottom outside width ± 1/16	Bottom outside length ± 1/16	Top inside length ± 1/16	Top inside width ± 1/16	Top outside width ± 1/16
12-3/4	2-7/8	3-3/4	11-3/4	12-1/4	4-1/4	4-5/8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE II. Dimensions - style 2, 3, and 4 pan sets (inches)

Style	Size	Number of pans in set	A Top outside length of set ± 1/8	B Top outside width of set ± 1/8	C Inside slope depth of pan ± 1/16	D Bottom outside width of pan ± 1/16	E Bottom outside length of pan ± 1/16	F Top inside length of pan ± 1/16	G Top inside width of pan ± 1/16	J Top spacing between pans
2	--	3	15-3/4	17	3-1/2	4	16	16-1/2	4-1/2	1/2
3	2	4	21-1/8	14-1/2	3-1/2	4	13-1/2	14	4-1/2	1/2
3	3	4	21-5/8	10-3/8	2-3/4	3-1/2	9-1/8	9-7/8	4-1/4	1
3	4	4	24-1/8	15-1/4	2-3/4	1/	14-1/16	14-5/8	5	5/8 (min.)
3	5	4	21-1/4	16-9/16	4	3-3/4	15-3/4	16	4	1
4	1	5	27	14-1/2	3-1/2	4	13-1/2	14	4-1/2	1/2
4	2	5	28	11	3-1/2	4-1/2	10	10-1/2	5	1/

1/ Manufacturer's standard

Source: https://assist.dla.mil -- Downloaded: 2026-10
Check the source to verify that this is the current versi

3.5.2 Pans. Grade A pans shall be fabricated of one piece of the aluminized steel specified in 3.4.3 with a thickness of 0.0218 inch nominal. Grade B pans shall be fabricated of one piece of the tin plate specified in 3.4.2 not thinner than 25 gage (0.0218 inch nominal). The pans shall have uncut folded corners and wire bead top edges. Wire bead edges shall be as specified in 3.5.5.

3.5.3 Style 3, size 3, pan sets. When style 3, size 3 pan sets are intended for use in peel ovens (see 6.2) they shall be provided with protective plates or shock absorbers to protect against end damage from the peel. Plates shall be fabricated of the same material as the pans. The grade A plates shall be not thinner than 19 gage (0.0468 inch nominal). The grade B plates shall have a thickness of not less than 0.045 inch. The plates shall be permanently attached to the end pans and held in place by the straps at each end of the pan sets. Four separating lugs located in accordance with the manufacturer's standard practice shall be provided. Each separating lug shall be formed as an integral part of the strapping and shall keep the pans separated by 1-inch $\pm$ 1/4-inch at all sides.

3.5.4 Style 3, size 4 (hearth pans). Style 3, size 4 pan sets shall have not less than two spacers between the individual pans. Spacers shall be fabricated of the wire specified in 3.4.1 with a diameter of not less than 0.177 inch. Spacers shall be welded to the wire pan frames. The liner shall be fabricated of the nominal 0.021 inch aluminized steel specified in 3.4.3 and shall be perforated in accordance with the manufacturer's standard practice. The end panels and the two top sides shall be wrapped around a wire to form a bead. The wire shall be butt welded. The wire shall be as specified in 3.4.1 with a diameter of 0.207 inch nominal. The liner shall have either curved or flared sidewalls as shown on figure 2. Strapping, as specified in 3.5.6, shall encircle the pan set just below the wire bead.

3.5.5 Wire bead. All pans shall have a top edge wire bead encircling the entire pan. The wire shall be as specified in 3.4.1. The wire bead shall be nominal 0.148 inch diameter for all pans except for the style 3, size 4 and 5 pans which shall be nominal 0.207 inch diameter.

3.5.6 Strapping. All pan sets shall have strapping fabricated of the same material as the pans, completely encircling the pan set just below the wire bead. Strapping shall have top and bottom rounded reinforcing channels or at the option of the manufacturer may be flat. Flat strapping shall be not less than 0.061 inch thick and not less than 1-1/2 inches wide. Reinforced strapping shall be not less than 0.048 inch thick and not less than 1-3/8 inches wide. Strapping shall have embossed or extruded offsets or other suitable means to prevent the sets of pans from shifting when nested. All pans, except the style 3, size 4, shall be permanently joined to the strapping at the pan ends in accordance with the manufacturer's standard

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

practice. Style 3, size 4, pans shall be held in place by spot-welding or projection welding, as shown on figure 2, or by riveting. Rivets, when used, shall pass through the external end folds (laps) of the pan only, or may pass entirely through the ends of the pan provided the rivet heads on the inside of the pan are thin, flat, and tight. Strapping for the style 3, size 4, pan sets shall be butted against the bottom of the pan bead as shown on figure 2.

3.5.7 Covers, style 3, size 5. The style 3, size 5 (Pullman) pan sets shall be provided with covers. The covers may be either individual sliding covers for each pan in the set or a drop-type cover fitting over the entire set of pans. When drop covers are used, they shall be fabricated of nominal 0.0299 aluminized steel specified in 3.4.3 and shall have perforations above the spacings between the pans. When individual covers are used they shall be of the same material as the pans or of the aluminized steel specified for the drop covers.

3.6 Marking for identification. Each bread pan or pan set shall be marked with the manufacturer's name, trade name, or trademark of such known character easily identifiable with said manufacturer. Marking shall be applied in accordance with MIL-STD-130.

3.7 Finish. The exterior surfaces of the pans and covers shall be finished in accordance with the manufacturer's standard practice. The inside surfaces of the pans and covers shall be glazed with the glazing compound specified in 3.4.3.

3.8 Workmanship. The finished bread pans and covers shall be clean and free of imbedded foreign matter, rust, sharp or rough edges, dents, burrs, die marks, buckles, deformities, fractures, punctures, scale, and pits. Welds shall be sound, smooth, clean and free of porosity and surface burns. All rivets shall be tight and the rivet heads shall be concentric and in full contact with the riveted metal surfaces.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

4.2 First article inspection. When a preproduction sample is required, it shall be examined for the defects listed in table III and dimensions specified. The presence of any defect listed in table III or any dimension not within specified requirements shall be cause for rejection of the preproduction sample.

4.3 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.3.2 End product inspection. The lot shall consist of all pans or pan sets of one style, size, and grade offered for inspection at one time. The sample unit shall be one completely fabricated pan or pan set, as applicable.

4.3.2.1 Visual examination. Visual examination shall be made in accordance with the classification of defects in table III. The inspection level shall be level II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE III. Classification of defects

Examine	Defect	Classification Major	Minor
Finish	Not in accordance with manufacturer's standard practice	X	
	Inside of pans or covers not glazed	X	
Construction and workmanship (General)	Rusty, imbedded foreign matter	X	
	Burrs, sharp edges	X	
	Die marks, dirty, dents over 1/16 inch deep	X	
	Scale, pits	X	
	Fractures, punctures, deformities	X	
	No provisions on strapping band to prevent shifting when pans are nested (style 2, 3, and 4 only)	X	
	Cover missing, (style 3, size 5 only)	X	
	Component missing, misaligned, or not securely fastened	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects (con.)

Examine	Defect	Classification Major	Minor
Construction and workmanship (General) (cont'd)			
Welding	Not type specified, missing, not sound	X	
	Not clean, not smooth, porous, surface burns		X
Rivets (when applicable)	Not type specified, missing, loose not concentric, not in full contact with riveted surfaces		X
Wire bead	Loose (top edge of pan not tightly rolled over wire)	X	
Style 3, size 4	Liner not perforated	X	
Marking	Missing, illegible, not as specified		X

4.3.2.2 Dimensional examination. Examination shall be made to determine compliance with dimensions specified. Any noncompliance shall be considered a defect. The inspection level shall be S-2 with an AQL of 4.0 expressed in terms of defects per hundred units.

4.3.3 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing, and marking comply with the requirements of section 5 of this specification. Defects shall be scored in accordance with table IV. The lot shall be the number of containers offered for inspection at one time. The sample unit shall be one shipping container fully prepared for delivery. The inspection level shall be S-4 with an AQL of 6.5, expressed in terms of defects per hundred units.

TABLE IV. Examination of preparation for delivery

Examine	Defect
Marking (exterior and interior)	Missing; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Components missing or damaged
Contents	Number per carton is not as specified

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

4.3.3.1 Examination of shipping containers. When shipping containers are required to be in accordance with PPP-B-601, PPP-B-591, PPP-B-576, or PPP-B-621, examination for defects in closure and strapping shall be in accordance with the applicable container specification.

4.4 Standards compliance. Proof of compliance with the requirements of 3.3 shall be made available to the Government representative.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Bread pans with covers, or bread pans alone shall be packaged in the quantities specified in table V in the most compact manner in a snug-fitting fiberboard box conforming to style RSC, type CF, variety SW, or type SF, class domestic of PPP-B-636. Each box shall be closed in accordance with the appendix of PPP-B-636.

5.1.2 Level B. Three, four or five pans as appropriate shall be packaged as one set in a snug-fitting paperboard, set-up or folding carton or fiberboard box. The box shall be closed to prevent the loss of contents.

5.1.3 Level C. Bread pans with covers or bread pans alone shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Bread pans with covers, or bread pans alone, packaged as specified in 5.1, shall be packed in the quantities specified in table V in a snug-fitting shipping container conforming to overseas type of PPP-B-601. Each shipping container shall be provided with a type I or II, grade C case liner conforming to MIL-L-10547. Closure and strapping shall be in accordance with PPP-B-601.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

TABLE V. Packaging and packing of bread pans and covers

Style and size	Quantity per package	Quantity per shipping container
Style 1, individual pan	40	120
Style 2, three-pan set	1/	12
Style 3, four-pan set		
Size 2	1/	12
Size 3	12	24
Size 4	12	24
Size 5	12	24
Style 4, five-pan set		
Size 1	1/	10
Size 2	1/	10

1/ Packaging not required.

5.2.2 Level B. Level B packing shall be civil agency or Military requirements as specified (see 6.2).

5.2.2.1 Civil agencies. Bread pans with covers or bread pans alone, packaged as specified in 5.1.2, shall be packed in quantities of eight sets of three pans; six sets of four pans; or five sets of five pans in a snug-fitting fiberboard shipping container conforming to class domestic of PPP-B-636. Closure shall be in accordance with the appendix of the container specification.

5.2.2.2 Military requirements. Bread pans with covers or bread pans alone, packaged as specified in 5.1, shall be packed in the quantities specifed in table V in a snug-fitting shipping container conforming to domestic type, Style A or B of PPP-B-601 or PPP-B-591; class 1 of PPP-B-576; or class 1, style 2 or 4 of PPP-B-621.

5.2.3 Level C. Bread pans with cover or bread pans alone, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers and packing shall comply with Uniform Freight Classification Rules, or National Motor Freight Classification Rules, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

5.3 Marking.

5.3.1 Civil agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with FED-STD-123.

5.3.2 Military requirements. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The bread pans covered by this specification are for use in bakeries. The grade A pan and pan sets are intended for use in areas where high corrosive conditions exist. The grade B pans and pan sets are for general use. The style 3, size 3 pan sets are intended for baking standard round top loaves. Style 3, size 4 pans are intended for baking hearth type French and rye breads. Style 3, size 5 pans are intended for baking sandwich (Pullman) loaves.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Style, size, and grade bread pan or bread pan set required (see 1.2).
(c) First article. When a preproduction sample is not required (see 3.1).
(d) When style 3, size 3 pan sets are for use in peel ovens (see 3.5.3).
(e) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(f) When civil agency or Military packing requirements are required for level B packing (see 5.2.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

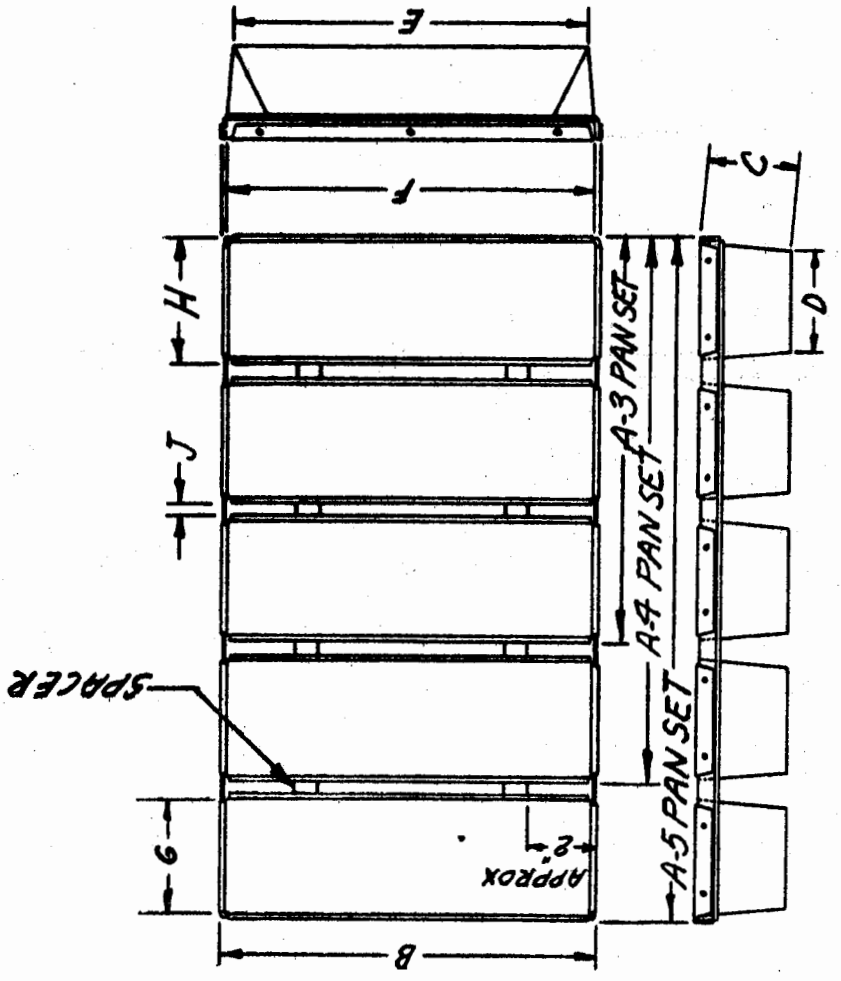


Figure 1, Pans, bread

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

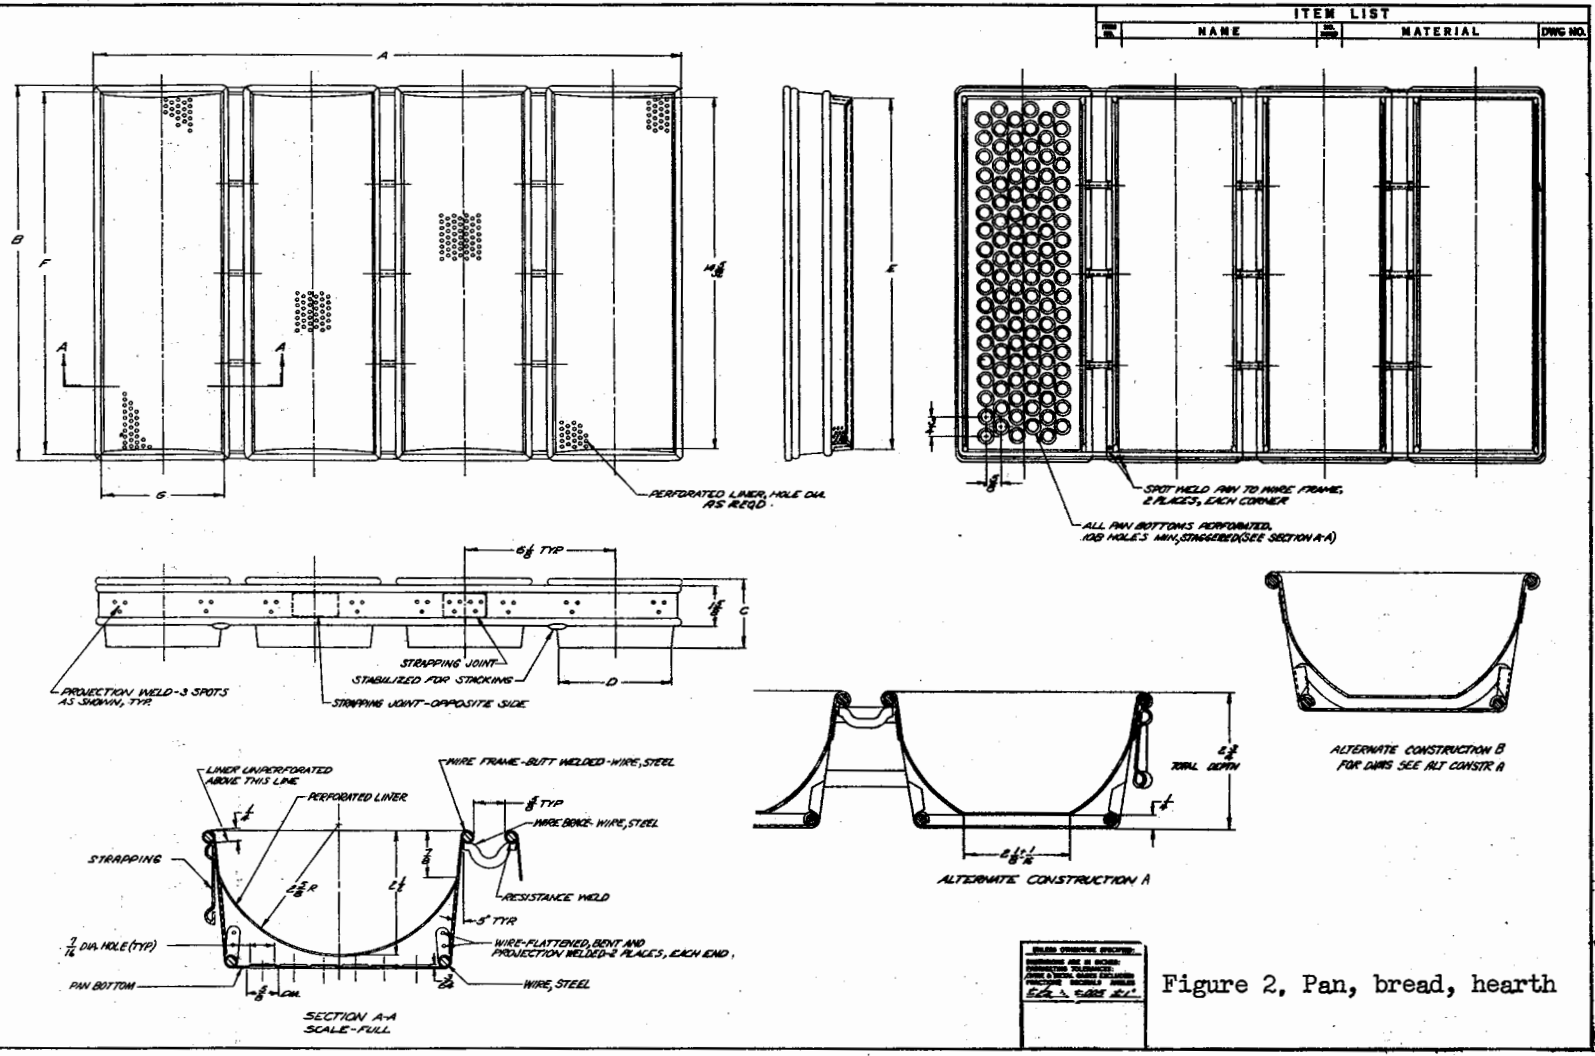


Figure 2, Pan, bread, hearth

RR-P-58D

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before u

6.3 Supersession data. The carbon steel bread pans specified in superseded RR-P-58c, June 3, 1968 have been deleted in this revision. Grade A (aluminized steel) and grade B (tin plated) pans have been added. Styles, sizes, and dimensions in this specification correspond to the styles, sizes, and dimensions specified in superseded RR-P-58c.

MILITARY CUSTODIANS:

Army - GL
Navy - SA
Air Force - 84

Review activities:

Army - MD
Navy - SA, MC

User activities:

Navy - YD

Preparing activity:

Army - GL

CIVIL AGENCIES INTEREST:

GSA
HEW
VA

Project No. 7330-0382

Orders for this publication are to be placed with Administration, acting as an agent for the Superintendent of Documents. See section of this specification to obtain extra copies and other documents referenced herein. Price

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

RR-P-58D Pans, Bread

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

OFFICIAL BUSINESS

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-BQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.