RR-T-25A
February 24, 1969
SUPERSEDING
Fed. Spec. RR-T-25
October 29, 1964

FEDERAL SPECIFICATION

TABLES, STEAM-JACKETED KETTLE

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers free standing and wall mounted corrosion-resisting steel tables for mounting the table tilting model kettles covered by RR-K-195.

1.2 Classification.

1.2.1 Styles and sizes. The tables shall be of the following styles and sizes as specified, (see 6.2):

Style 1. Free standing.

Style 2. Wall mounted.

Size 1. 2 - Kettle table. 1/

Size 2. 3 - Kettle table. 1/

1/ Specify whether table is for 2-1/2, 5-, or 7-1/2 gallon kettles or any combination thereof.

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following specifications and standards, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

RR-K-195 - Kettles, Steam-Jacketed (Corrosion-Resisting Steel, Steam).

PPP-B-601 - Boxes, Wood, Cleated-Plywood.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

PPP-B-636 - Box, Fiberboard.

PPP-C-650 - Crates, Wood, Open and Covered.

Federal Standard:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.)

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Wash.)

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

MIL-STD-129 - Marking for Shipment and Storage.

MIL-STD-130 - Identification Marking of U. S. Military Property.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

National Santitation Foundation (NSF) Publications:

Standard No. 2 - Food Service Equipment.

Listing of Food Service Equipment.

(Application for copies should be addressed to the National Sanitation Foundation, P. O. Box 1468, Ann Arbor, Michigan, 48106.)

American Society for Testing and Materials (ASTM) Standards:

A 123 - Zinc (Hot-Galvanized) on Products Fabricated from Rolled, Pressed and Forged Steel Shapes, Plate, Bar, and Strip

A 167 - Corrosion-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip

A 176 - Corrosion-Resisting Chromium Steel Plate, Sheet, and Strip

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pa. 19103.)

American Trucking Associations, Inc.

National Motor Freight Classification.

(Application for copies shall be addressed to the American Trucking Associations, Inc., 1616 P Street, N. W., Washington, D. C. 20036.)

National Classification Committee:

Uniform Freight Classification.

(Application for copies shall be addressed to the Uniform Classification Committee, 202 Union Station, Chicago, Ill. 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 First article. Unless otherwise specified (see 6.2), before production is commenced, a sample table shall be submitted or made available to the contracting officer or his authorized representative for approval

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

in accordance with 4.2. Approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Standard product. The tables delivered under this specification shall be the manufacturer's commercially current standard product, except for any changes necessary to comply with specification requirements.

3.3 NSF Standard. Tables shall conform to the applicable requirements of NSF Standard No. 2.

3.3.1 NSF Certification. The supplier shall submit satisfactory evidence to the contracting officer or his authorized representative that the table he proposes to furnish under this specification meets the applicable requirement of NSF Standard No. 2 as follows:

(1) A listing in the current edition of the NSF "Listing of Food Service Equipment" or display of the NSF seal on the finished table, shall be submitted prior to approval of the preproduction sample, if one is submitted, or prior to approval of the first shipment or

(2) A certified test report from a recognized independent testing laboratory acceptable to the medical department of the service for which the tables are being procured, indicating that the tables have been tested and conform to NSF Standard No. 2, shall be submitted prior to the approval of the preproduction sample, if one is submitted, or prior to commencing production.

3.4 Materials. Materials not definitely specified shall be of the quality normally used by the manufacturer in his standard commercial table.

3.4.1 Corrosion-resisting steel. Corrosion-resisting steel used for food-contact surfaces shall conform to any of the type 300 series specified in ASTM A167. When corrosion-resisting steel is used for other surfaces, the chemical compositions of any of the type 300 series of ASTM A 167, or any of the type 400 series of ASTM A 176 shall be used.

3.5 Design. The table exterior shall be corrosion-resisting steel as specified in 3.4.1, and the frame shall be carbon steel (see figure 1). The size 1 table shall be designed for holding two kettles of the capacity specified and the size 2 table shall be designed to hold three kettles of the capacity specified (see 6.2). Style 1 tables shall be provided with legs and style 2 tables shall have provisions for wall mounting. The tables shall be of the step design and shall have a top surface for mounting the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

kettles and a lower surface for supporting a vessel to receive the liquid or food when the kettle is tilted. Openings in the top for mounting kettle supports and for connecting steam and condensate lines, shall be provided.

3.6 Construction. Tables shall be constructed as specified herein and as shown in figure 1. Style 1 and style 2 tables shall be of angle-frame construction enclosed by a nominal 0.0625-inch-thick outer skin of corrosion-resisting steel, as specified in 3.4.1. Frame angles shall be carbon steel finished as specified in 3.9. The corrosion-resisting steel top shall be either tack-welded to the frame or secured with studs welded to the top skin and bolted to the framework. The tables shall have a continuous raised lip on all outer edges. Style 1 tables shall have a skirt on all four sides and style 2 tables shall have a skirt on the front and ends. The length of the tables shall be as necessary to mount the required size and quantity of kettles specified (see 1.2) plus 5 inches. A carbon steel channel extending the full length of the table and welded at each end to the frame shall be provided to support the kettles.

3.6.1 Drain trough. The lower surface of the table top shall be provided with a corrosion-resisting steel drain trough for collecting and draining spillage. The drain trough shall be pitched to allow complete drainage and shall have provisions for connecting drainage piping. The trough shall be provided with two or more removable louvered nonsplash covers fabricated of corrosion-resisting steel specified in 3.4.1. The top edge of the covers shall be flush with the table top and edges of slots or louvers in covers shall be smoothly finished. The covers shall be provided with lift-out holes for removal from the trough.

3.6.2 Legs. Style 1 tables shall be provided with corrosion-resisting steel adjustable leg assemblies with bullet-type feet. Legs shall be fabricated of nominal 1-5/8 inch tube and shall be removable from the under-table gussets. Tables shall be provided with four leg assemblies (two at each end). Legs shall provide a table height of 31 inches, plus or minus 1/4 inch when the bullet feet are screwed all the way in. In lieu of the leg gussets shown on the drawing the supplier may provide a corrosion-resisting steel threaded flange welded to the frame.

3.6.3 Mounting brackets. When specified (see 6.2), style 2 tables shall be provided with structural steel mounting brackets. The vertical members of the brackets shall be designed for mounting in the kitchen wall and welded to the horizontal bracket-members in the floor. The channel brackets shown in figure 1 are illustrative only and not restrictive.

Source: https://assist.dla.mil -- Downloaded: 20260-26T12:08Z
Check the source to verify that this is the current version before use.

3.7 Welding and brazing. Welding and brazing shall be complete, with no evidence of burn holes, cracks, severe undercuts, fractures, or porous areas. Welding and brazing shall be smooth and uniform, and there shall be no slag inclusion, or scale and flux deposits. All welding of corrosion-resisting steel shall be accomplished with welding rods having corrosion-resistant qualities equal to or better than the basic metal.

3.8 Identification marking. The table shall be marked with the manufacturer's name, trade name or trademark readily identifiable with said manufacturer. Marking shall be applied in accordance with MIL-STD-130.

3.9 Finish. All finished surfaces shall conform to NSF Standard No. 2 and shall be smooth, uniform, free of permanent soil or corrosion. Frame angle irons and channels shall be hot-dip galvanized in accordance with ASTM A 123. The zinc coating shall be not less than 0.003-inch thickness nor less than 0.0034-inch average thickness (see 4.3.2).

3.10 Workmanship. The finished table shall be free from marred surfaces, dents, punctures, fractures, rough edges, burrs, and slivers. All fasteners shall be tight. No component shall be missing, malformed. All components shall be carefully assembled, properly adjusted and aligned.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 First article inspection. When a preproduction sample is required, it shall be examined for defects in table I and dimensions specified.

4.3 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

4.3.2 Process inspection. Process inspection shall be made to determine conformance with the zinc coating thickness requirements of 3.9. At least four coating thickness measurements shall be made to determine the average, each one on the flat of a different structural member of the table frame. Whenever nonconformance is noted, correction shall be made to affected items and processes. Failure to make immediate correction shall be cause for rejection of affected items.

4.3.3 End item inspection. The inspection lot shall be the number of tables of one style and size offered for acceptance at one time. The sample unit for this examination shall be one completely assembled table.

4.3.3.1 Visual examination. Examination of the end item shall be made for defects in table I. The inspection level shall be level II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE I. Classification of defects

Examine	Defect	Classification Major	Classification Minor
Finish, corrosion-resisting steel	Not smooth, uniform, or free of permanent soil and corrosion.	X	
	Embedded foreign matter.		X
	Rough grind and trimming marks, tool or die marks.		X
Construction and workmanship (applicable to all components)	Any component not as specified.	X	
	Any component, part, or accessory missing.	X	
	Any component split, cracked or fractured.	X	
	Any component bent, warped, or dented.	X	
	Component improperly assembled, or out of position.	X	
Threaded fasteners	Missing, broken, stripped, or fractured.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (con.)

Examine	Defect	Classification Major	Minor
Welding	Not ground smooth on exposed surfaces.	X	
	Not sound (burned through, cracked, or undercut).	X	
	Flash or spatter not removed.		X
	Welding missing, where required.	X	
Identification marking	Nameplate missing, not securely affixed, or not located as specified.		X
	Incomplete; not legible.		X

4.3.3.2 Dimensional examination. Dimensional examination shall be made of the end item to determine compliance with this specification. Any dimension not within the specified requirements shall be classified a defect. The inspection level shall be S-2 with an AQL of 4.0 defects, expressed in terms of defects per hundred units.

4.3.4 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing, and marking as required by section 5 of this specification are complied with. Defects will be scored as specified in table II. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of shipping containers offered for inspection at one time. The inspection level shall be S-2 and the AQL shall be 4.0 defects, expressed in terms of defects per hundred units.

4.3.4.1 Examination of shipping containers. When shipping containers are required to be in accordance with PPP-B-601 or PPP-C-650, examination for defects in closure and strapping shall be in accordance with the applicable container specification.

TABLE II. Examination of preparation for delivery

Examine	Defect
Markings	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Components missing, damaged or otherwise defective.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Legs. The legs shall be removed from the style 1 table and packaged in a snug-fitting fiberboard box conforming to style optional type CF, variety SW, or type SF, class domestic of PPP-B-636. The box shall be closed in accordance with the appendix of PPP-B-636 and secured to the table in such a manner as to prevent movement or damage while in transit.

5.1.1.2 Brackets and bolts. Removable wall-mounting brackets for the style 2 table shall be packaged in a fiberboard box and secured to the table as specified for legs in 5.1.1.1. Wall mounting bolts for the style 2 table shall be placed in a cotton cloth drawstring bag, the bag tied closed, and placed in the same box as the bracket or secured to the table.

5.1.1.3 Table. The drain trough covers shall be secured in such a manner as to prevent movement or vibration while in transit. Each table shall be packaged in a snug-fitting fiberboard box conforming to style RSC, type CF, variety DW, or type SF, class domestic of PPP-B-636. Each box shall be closed in accordance with the appendix of PPP-B-636.

5.1.2 Level C. The table shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Table. Each table, packaged as specified in 5.1, shall be packed in a snug-fitting, cleated-plywood shipping container conforming to overseas type, style A or B of PPP-B-601. Closure and strapping shall be in accordance with the appendix of PPP-B-601.

5.2.2 Level B.

5.2.2.1 Table. Each table, packaged as specified in 5.1, shall be packed in a snug-fitting crate conforming to type II, style B of PPP-C-650. Each crate shall be closed and strapped in accordance with the appendix of the crate specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

5.2.3 Level C. Tables, packaged as specified in 5.1, and wall and floor reinforcing members shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Rules, as applicable.

5.3 Marking.

5.3.1 Civil agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The tables covered by this specification are intended for use in kitchens of Federal civil agencies and Military hospitals.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.

(b) Style and size required, including capacity of each kettle (see 1.2.1 and 3.5).


(c) First article. When a preproduction sample is not required (see 3.1).

(d) When mounting brackets (style 2 tables only) are required (see 3.6.3 and 6.3).

(e) Selection of the applicable levels of packaging, and packing (see 5.1 and 5.2).

6.3 The contracting officer should determine that mounting brackets for style 2 tables, when procured separately, are designed for the end item table to be provided under this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

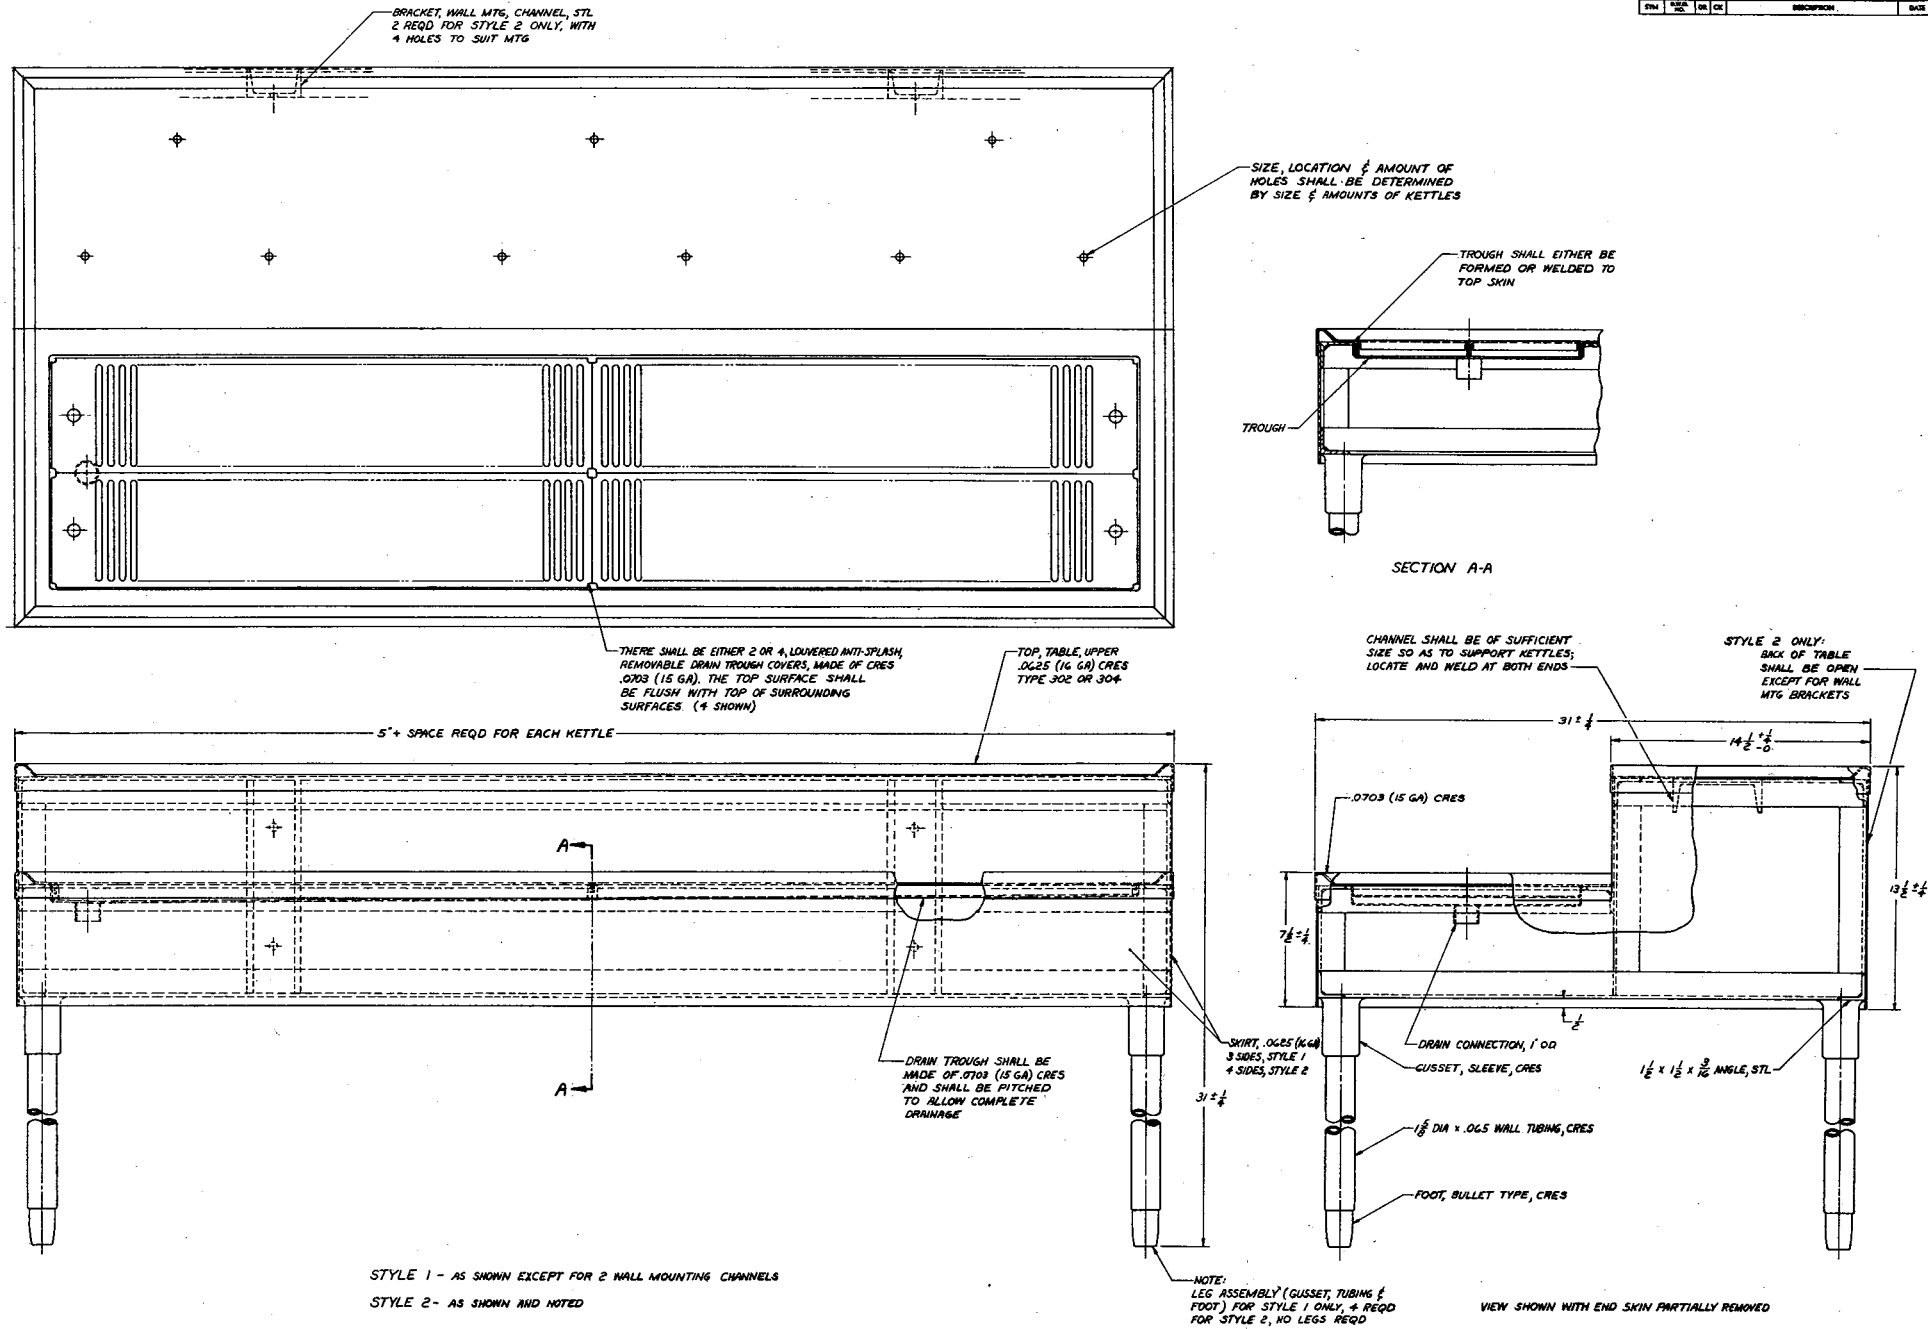

NOTE:
ENTIRE FRAME TO BE HOT DIP GALV. AFTER FABRICATION

FIGURE - 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26 10:10:00
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

MILITARY CUSTODIANS:

Army - GL

Navy - YD

Air Force - 84

Review activities:

Army - MD

Navy - MC, SA, YD

Air Force - 84, 85

Preparing activity:

Army - GL

Source: https://assist.dla.mil -- Downloaded: 20260410-26T12:08Z
Check the source to verify that this is the current version before use.