FEDERAL SPECIFICATION

TABLES, STEAM-JACKETED KETTLE

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers free standing and wall mounted corrosion-resisting steel tables for mounting the table tilting model kettles covered by RR-K-195.

1.2 Classification.

1.2.1 *Styles and sizes.* The tables shall be of the following styles and sizes as specified, (see 6.2):

Style 1. Free standing
Style 2. Wall mounted
Size 1. 2—Kettle capacity*
Size 2. 3—Kettle capacity*

* Specify whether table is for 2-1/2, 5-, or 7-1/2 gallon kettles or any combination thereof.

2. APPLICABLE SPECIFICATIONS, STANDARDS, AND OTHER PUBLICATIONS

2.1 The following specifications and standards, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

PPP-B-636—Box, Fiberboard.
PPP-B-650—Crates, Wood, Open End, Covered.

Federal Standards:

Fed. Std. No. 66—Steel; Chemical Composition and Hardenability.
Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.
Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specification:

MIL-Z-17871—Zinc Coating (Hot-Dip Galvanizing).

Military Standards:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129—Marking for Shipment and Storage.
MIL-STD-130—Identification Marking of U. S. Military Property.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

National Sanitation Foundation (NSF):

Standard No. 2—Food Service Equipment.

Seal of Approval Listing of Food Service Equipment.

(Application for copies should be addressed to the National Sanitation Foundation, Ann Arbor, Michigan.)

Technical Society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.

3. REQUIREMENTS

3.1 Preproduction sample. Unless otherwise specified (see 6.2), before production is commenced, a sample table shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. Approval of the preproduction sample authorizes commencement of production, but does not relieve the supplier of responsibility for compliance with the applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Sanitation standards compliance. The tables covered by this specification shall conform to NSF Standard No. 2—"Food Service Equipment".

3.3 NSF certification. Prior to approval of the preproduction sample, if one is submitted, or prior to approval of the first shipment, the supplier shall submit satisfactory evidence to the contracting officer or his authorized representative that the model table he proposes to furnish under this specification meets the requirements of NSF Standard No. 2. Acceptable evidence of meeting the requirements of this standard shall be the NSF seal of approval, a listing in the NSF "Seal of Approval Listing of Food Service Equipment", or a certified test report from a recognized independent testing laboratory, acceptable to the departmental medical authority having jurisdiction, indicating that the model table offered conforms to NSF Standard No. 2.

3.4 Design. The tables shall be designed with a corrosion-resisting steel exterior and a carbon steel frame as shown on figure 1. The size 1 table shall be designed for holding two kettles of the capacity specified and the size 2 table shall be designed to hold three kettles of the capacity specified. Style 1 tables shall be provided with legs and style 2 tables shall have provisions for wall or bulkhead mounting. The tables shall be of the step design and shall have a top surface for mounting the kettles and a lower surface for supporting a vessel to receive the liquid or food when the kettle is tilted.

3.5 Materials. Unless otherwise specified herein, materials shall be of the type and quality normally used by the manufacturer in the production of items of this type. Commercial tolerances are applicable to material thicknesses specified herein and on figure 1.

3.5.1 *Corrosion-resisting steel.* Corrosion-resisting steel shall conform to the chemical composition of AISI steel number 302 or 304, specified in Fed. Std. No. 66.

3.6 Construction. The tables shall be constructed as specified herein and as shown on figure 1. The tables shall be provided with required openings in the top for mounting the kettles and connecting steam and condensate lines.

3.6.1 *Styles* 1 *and* 2. The style 1 and style 2 tables shall be of angle-frame construction enclosed by a nominal 0.0625-inch-thick outer skin of the material specified in 3.5.1. Frame angles shall be carbon steel finished as specified in 3.10. The corrosion-resisting steel top shall be either tack-welded to the frame or secured with studs welded to the top skin and bolted to the framework. The tables shall have a continuous raised lip on

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

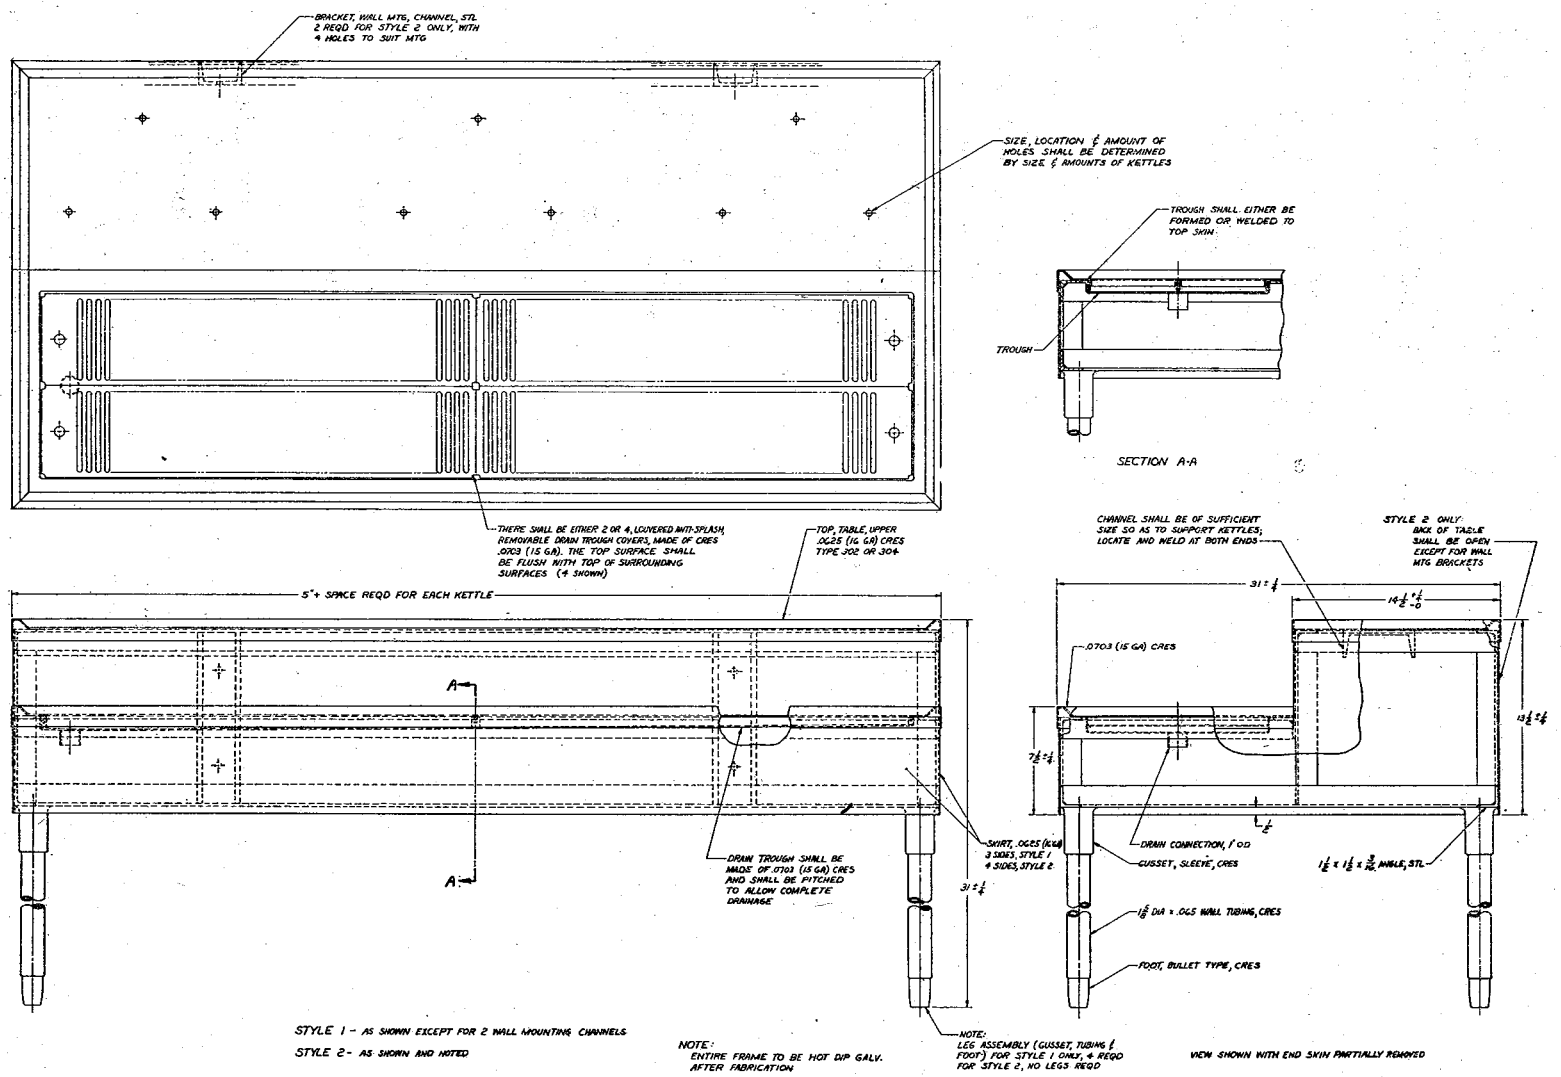


FIGURE 1.—Tables, steam jacketed kettle; styles 1 and 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

all outer edges. Style 1 tables shall have a skirt on all four sides and style 2 tables shall have a skirt on the front and ends. The length of the tables shall be as necessary to mount the required size and quantity of kettles specified (see 1.2) plus five inches. A carbon steel channel extending the full length of the table and welded at each end to the frame shall be provided to support the kettles.

3.6.1.1 *Drain trough.* The lower surface of the table top shall be provided with a corrosion-resisting steel drain trough for collecting and draining spillage. The drain trough shall be pitched to allow complete drainage and shall have provisions for connecting drainage piping. The trough shall be provided with two or more removable louvered nonsplash covers fabricated of corrosion-resisting steel specified in 3.5.1. The top edge of the covers shall be flush with the table top and edges of slots or louvers in covers shall be smoothly finished. The covers shall be provided with lift-out holes for removal from the trough.

3.6.2 *Legs.* Style 1 tables shall be provided with corrosion-resisting steel adjustable leg assemblies with bullet-type feet. Legs shall be fabricated of nominal 1-5/8 inch tube and shall be removable from the under-table gussets. Tables shall be provided with four leg assemblies (two at each end). Legs shall provide a table height of 31 inches, plus or minus 1/4 inch when the bullet feet are screwed all the way in. In lieu of the leg gussets shown on the drawing the supplier may provide a corrosion-resisting steel threaded flange welded to the frame.

3.6.3 *Wall brackets.* Style 2 tables shall be equipped with mounting brackets designed to securely mount the table to the wall. The brackets shall be drilled to receive the bolts or studs necessary for securing the table to the in-wall carrier. The brackets shown on figure 1 are illustrative only and are not intended to preclude other designs meeting this specification.

3.6.3.1 *Wall and floor supports.* Style 2 tables shall be equipped with in-wall carriers and floor supports with necessary bolts, nut and washers. In-wall carriers shall be fabricated of carbon steel angles, channels, or plates. The in-wall carriers shall be bolted or welded to the floor supports.

3.7 **Welding.** All welding of corrosion-resisting steel shall be accomplished with welding rods having corrosion-resistant qualities equal to or better than the basic metal. Exposed welds shall be free of splatter, burn-through, or flashes.

3.8 **Interchangeability.** For purposes of interchangeability all tables of one style and size furnished under this specification and any one contract, including parts and assemblies thereof, shall be identical.

3.9 **Identification marking.** The tables shall be provided with a corrosion-resisting steel identification plate marked in accordance with MIL-STD-130. The plate shall be securely affixed to the front skirt.

3.10 **Finish.** Slivers, burrs, and sharp edges shall be removed. All exposed surfaces of corrosion-resisting steel including the top of the nonsplash covers shall have a standard No. 4 polish. Corrosion-resisting steel surfaces on the underside of the table and underside of nonsplash covers and drain trough shall have a No. 2B or 2D finish. Frame angle irons and channels shall be hot-dip galvanized in accordance with standard commercial practice. The zinc coating shall be not less than 0.003-inch thickness nor less than 0.0034-inch average thickness (see 4.3.2).

3.11 **Workmanship.** The tables shall conform to the grade and quality of product established by this specification.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 **Responsibility for inspection.** Unless otherwise specified in the contract or purchase order, the supplier is responsible for

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection. When a preproduction sample is required, it shall be examined for the defects listed in table I and dimensions specified herein.

4.3 Sampling for acceptance and inspection. Sampling for inspection and acceptance shall be performed in accordance with the provisions set forth in MIL-STD-105, unless otherwise specified.

4.3.1 *Component and material inspection.* In accordance with 4.1, the supplier is responsible for insuring that components and materials used are manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified or, if none, in accordance with this specification.

4.3.2 *In-process examination.* Examination shall be made to determine conformance with galvanizing thickness requirements as specified in 3.10. Testing shall be performed in accordance with MIL-Z-17871.

4.3.3 *End product inspection.* For sampling purposes the inspection lot shall consist of all tables of one style and size offered for acceptance at one time. The sample unit for this examination shall be one table steam-jacketed kettle.

4.3.3.1 *Visual examination.* Examination of the tables shall be in accordance with the classification of defects set forth in table I. The inspection level shall be level II with acceptable quality levels (AQL's) of 2.5 for major defects and 6.5 for total defects expressed in terms of defects per hundred units.

TABLE I—*Classification of defects*

Examine	Defect	Classification	
		Major	Minor
Finish, corrosion-resisting steel	Not No. 4 finish on exposed surfaces	X	
	Not 2B or 2D on unexposed surfaces		X
	Embedded foreign matter, dirt or grease on working surface		X
	Rough grind and trimming marks, tool or die marks		X
All components	Sliver, burr, or sharp edge	X	
Construction and workmanship (applicable to all components)	Any component not as specified	X	
	Any component, part, or accessory missing	X	
	Any component split, cracked or fractured	X	
	Any component bent, warped, or dented	X	
	Component improperly assembled, or out of position	X	
Threaded fasteners	Missing, broken, stripped, or fractured		X
Welding	Not ground smooth on exposed surfaces	X	
	Not sound (burned through, cracked, or undercut)	X	
	Flash or spatter not removed		X
	Welding missing, where required	X	
Identification marking	Nameplate missing, not securely affixed, not corrosion-resisting steel, or not located as specified		X

4.3.3.2 *Dimensional examination.* Examination shall be made of the end item to determine conformance with dimensional requirements specified herein. Any nonconformance with specified requirements shall be classified a defect. The inspection level

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

shall be S2 with an AQL of 4.0 expressed in terms of defects per hundred units.

4.3.4 *Examination of preparation for delivery.* An examination shall be made to determine that packaging, packing, and marking as required by PPP-C-650 and section 5 of this specification are complied with.

4.3.5 *Code and standards compliance.* Proof of compliance with the requirements of 3.2 shall be available to the Government representative.

5. PREPARATION FOR DELIVERY

Fed. Std. No. 102 shall be referred to for definitions and application of the various levels of packaging and packing for civil agency procurements.

5.1 **Packaging.** Packaging shall be level A or C, as specified (see 6.2).

5.1.1 *Level A.*

5.1.1.1 *Legs.* The legs shall be removed from the style 1 table and packaged in a snug-fitting fiberboard box conforming to type CF or SF, class domestic, style optional of PPP-B636. The box shall be securely closed and secured to the table by tape or tying with cotton cord or twine in such a manner as to prevent movement or damage while in transit.

5.1.1.2 *Brackets and bolts.* Removable wall mounting brackets for the style 2 table shall be packaged in a fiberboard box and secured to the table as specified for legs in 5.1.1.1. Wall mounting belts for the style 2 table shall be placed in a cotton cloth drawstring bag, the bag tied, closed and placed in the same box as the bracket or secured to the table.

5.1.1.3 *Table.* The drain trough covers shall be secured in such a manner as to prevent movement or vibration while in transit. Each table shall be packaged in a snug-fitting fiberboard box conforming to class 2, V3c or V3s, style RSC of PPP-B-636 and the box waterproofed by means of tape in accordance with the appendix of the box specification.

5.1.2 *Level C.* Tables shall be packaged in accordance with the industry's practice.

5.2 **Packing.** Packing shall be level A or C, as specified (see 6.2).

5.2.1 *Level A.*

5.2.1.1 *Table.* Each table, packaged as specified in 5.1, shall be packed in a snug-fitting crate conforming to type II, style A of PPP-C-650. Each crate shall be closed and strapped in accordance with the appendix of the crate specification.

5.2.1.2 *Wall and floor reinforcing members.* Wall and floor reinforcing members shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.2.2 *Level C.* Tables, packaged as specified in 5.1, and wall and floor reinforcing members shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 **Marking.**

5.3.1 *Civil agencies.* In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 *Military requirements.* In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance wtih MIL-STD-129.

6. NOTES

6.1 **Intended use.** The tables covered by this specification are intended for use in kitchens of Federal and Military hospitals.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

6.2 **Ordering data.** Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.

(*b*) Style and size of table required (see 1.2).

(*c*) When a preproduction sample is not required (see 3.1).

(*d*) When separate procurement of bracket in-wall carriers and floor supports is required (see 3.6.3.1).

(*e*) Selection of the applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 The contracting officer should determine that the mounting bracket, in-wall carriers, and floor supports, when procured separately, are designed for the end item table to be provided under this specification.

6.4 **Transportation description.** Transportation descriptions and minimum weights applicable to this commodity are:

Rail:

Tables, not otherwise indexed by name, steel.

Carload minimum weights:

In cars 40 feet 9 inches or less in length, inside measurements 10,000; 12,000; 15,000; 18,000; 22,000; and 30,000 pounds.

Motor:

Tables, not otherwise indexed, steel.

Truckload minimum weights:

10,000 12,000; 15,000; 18,000; 22,000; and 30,000 pounds subject to Rule 115, National Motor Freight Classification.

6.5 **Level B (civil agency packaging and packing).** When level B packaging and packing are specified for civil agency procurement, the requirements of 5.1.1 and 5.2.1 level A packaging and packing shall apply.

MILITARY CUSTODIANS:

Army—GL
Navy—YD
Air Force—67

Interested activities:

Review

Army—MD
Navy—MC, SA, YD
Air Force—67

Preparing activity:

Army—GL

Reviewer information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current Federal Supply Classification Listing Of DOD Standardization Documents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.