RR-W-50b
September 10, 1964
SUPERSEDING
Fed. Spec. RR-W-50a
October 17, 1958

FEDERAL SPECIFICATION

WASTE RECEPTACLE, REMOVABLE OPEN TOP TYPE, (SANITARY)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE

1.1 Scope. This specification covers one type and one size of metal sanitary waste receptacle with a removable open top.

2. APPLICABLE SPECIFICATIONS, AND STANDARDS

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

QQ-S-698—Steel, Sheet and Strip, Low-Carbon.
QQ-W-461—Wire, Steel, Carbon, (Round, Bare and Coated).
QQ-W-470—Wire, Steel, High Carbon, Spring, Bright, Music.
PPP-B-636—Box, Fiberboard.

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.
Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).
Fed. Test Method Std. No. 151—Metals; Test Methods.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Preproduction sample. When specified (see 6.2), before production is commenced, a sample of the waste receptacle shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

the commencement of production, but does not relieve the supplier of the responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production item.

3.2 Standard product. The waste receptacle shall be the manufacturer's current standard commercial product, except as specified herein.

3.3 Materials. The materials specified shall conform to the referenced specifications and requirements specified hereinafter.

3.3.1 *Steel.*

3.3.1.1 *Steel, carbon, sheet and strip.* Sheet steel shall conform to commercial quality cold rolled (CRCQ) of QQ-S-698.

3.3.2 *Wire, steel spring.* Spring steel wire shall conform to any composition and temper of QQ-W-470.

3.3.3 *Rod, steel, low carbon, round.* Round low carbon steel rod shall be commercial grade.

3.3.4 *Wire, steel, carbon.* Carbon steel wire shall conform to 1006-1015, practice A, finish 1 of QQ-W-461. The diameter of the wire shall be 1/8 inch.

3.4 Construction. The construction of the waste receptacle shall conform to requirements specified herein and as shown on figure 1. The removable open top shall fit snugly without binding over the top of the body. The fixed bottom panel shall be welded to the inside of the body. The insert retainer shall fit tightly in order to hold the paper bag insert in position at the top portion of the receptacle.

3.5 Details of components.

3.5.1 *Body.* The body shall be formed from one piece of sheet steel specified in 3.3.1.1, not less than 0.0179 inch thick (26 gage) or from two pieces joined together by tightly locked seams located diametrically opposite each other. The top edge shall be rolled outward and tightly beaded over 1/8-inch diameter wire specified in 3.3.4, or rolled outward and tightly without use of reinforcing wire. The bottom edge shall be rolled or flanged inward.

3.5.2 *Top, removable.* The removable top shall be formed from one piece of steel specified in 3.3.1.1 not less than 0.029 inch thick (22 gage). The outer edge shall be flanged down, and the end edge rolled outward and tightly beaded over 1/8-inch diameter wire specified in 3.3.4, or rolled outward and tightly without use of reinforcing wire. A depressed concentric center opening shall be provided. The top surface shall be smoothly tapered toward the center opening. The edge of the opening shall be uniformly flanged downward for a distance of 3/8 inch plus or minus 1/8 inch, and shall be smoothly finished.

3.5.3 *Handles.*

3.5.3.1 *Single.* Each receptacle shall be fitted with one or two handles located 18 inches plus or minus 1/2-inch from the bottom of the receptacle. Where one handle is provided, it shall be made of 1/4-inch diameter round steel rod. The handle shall be U-shaped, with a grip not less than 4 inches in length. The distance between the receptacle body and the inside of the handle shall measure not less than 3 inches when the handle is in the horizontal position. The handle shall be secured to the receptacle body by means of two handle brackets, each bracket securely welded to the body. The handle brackets shall allow enough clearance to enable the handle to be moved up and down.

3.5.3.2 *Two handles.* Where two handles are furnished, (not shown on figure 1), they shall be stationary, formed handles. They shall be attached by means of suitable riv-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

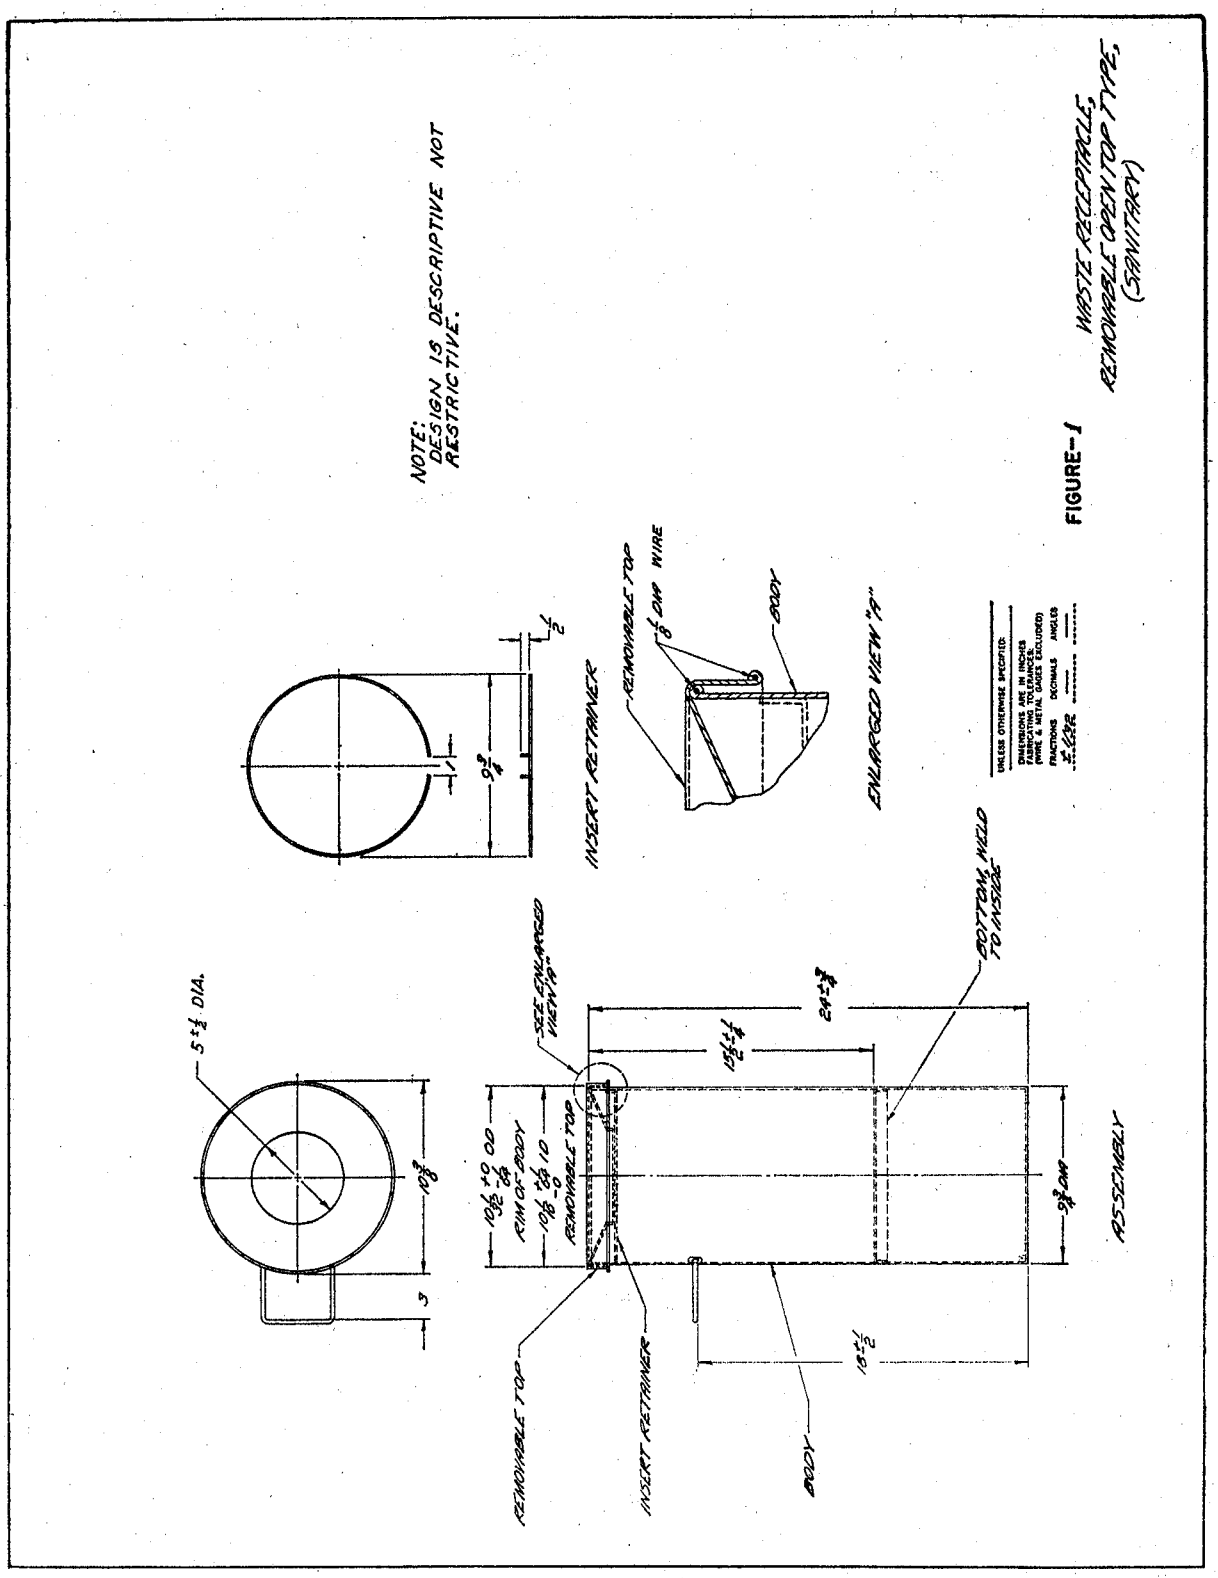


FIGURE-1 WASTE RECEPTACLE, REMOVABLE OPEN TOP TYPE, (SANITARY)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

ets and washers, or plated oval-head machine screws with nuts and lock-washers. All sharp edges shall be removed so as not to cause damage to the paper bag while it is being removed from the receptacle. Handles shall be formed to fit the circumference of the body, and shall extend 1 inch plus or minus 1/8 inch out from the body. The finger opening of the handle in the horizontal dimension shall be not less than 3 inches.

3.5.4 *Retainer, insert.* The insert retainer shall be formed from steel wire specified in 3.3.2, not less than 1/8 inch in diameter. The retainer ends shall be bent upward not less than 1/2 inch at right angles, or suitably formed to provide a finger-hold for convenient insertion or removal of the retainer.

3.6 Finish.

3.6.1 *Plating.* The removable top and the handle(s) shall be heavily and uniformly chromium-plated over nickel with an undercoat of copper. The minimum thickness of each coat of plating shall be as follows:

	Inch
Chromium	0.00002
Nickel	.0008
Copper	.0002

Plating shall pass the thickness test specified in 4.4.1. After plating, the removable top and the handle shall be polished to a mirror luster.

3.6.2 *Painting.* Exterior and interior parts of the body shall be cleaned and enameled in accordance with the manufacturer's commercial practice. The color of the enamel shall be cream white.

3.7 Marking, identification. The receptacles shall be marked with the manufacturer's identification. Decalcomanias shall not be employed. Location of marking shall be on the outside bottom of the receptacle.

3.8 Workmanship. The finished waste receptacle shall conform to the quality and grade of product established by this specification.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection. When a preproduction sample is required, the preproduction sample shall be examined in accordance with defects in 4.3.3.1, dimensions specified, and tested in accordance with 4.4.1.

4.3 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated.

4.3.1 *Inspection of materials and components.* In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used were manufactured, tested and inspected in accordance with the specified requirements of referenced subsidiary specifications and standards to the extent specified or, if none, in accordance with this specification.

4.3.2 *Intermediate testing.* Intermediate testing shall be performed for thickness of plating in accordance with 4.4.1. The inspection level shall be S-2 with an acceptable quality level (AQL) of 1.5 expressed in terms of defects per hundred units.

4.3.3 *Inspection of the end item.* The lot shall consist of all complete receptacles offered for acceptance at one time. The sam-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

ple unit for this inspection shall be one completely fabricated receptacle.

4.3.3.1 *Visual examination.* Examination of the end item shall be in accordance with the classification of defects in table I. The inspection level shall be level II with an AQL of 2.5 for major defects, and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE I—*Classification of defects*

Examine	Defect	Classification	
		Major	Minor
Finish (enamel)	Color not as specified	X	
	Coating not smooth, continuous or adherent		X
	Not free of lumps, blisters, gritty or uncoated areas	X	
	Foreign matter embedded in finish	X	
	Indication of rust or scale under enamel	X	
	Cracked, blistered, chipped		X
Chromium finish (removable top and handle)	Not chromium plated	X	
	Foreign matter embedded in plating	X	
	Scratched surface (exposing base metal)		X
	Pitted, chipped or rough surface		X
	Not polished as specified		X
Construction and workmanship	Component missing	X	
	Any component not fabricated as specified (unless otherwise classified herein)	X	
	Body panel not formed or not joined as specified		X
	Top and bottom body edges not formed as specified	X	
	Bottom panel not joined to body as shown on figure 1		X
	Not provided with carrying handle or handles as specified		X
	Handles not as specified	X	
	Any part malformed, bent, out of shape, warped, or mispositioned	X	
	Any component not securely mounted or attached as specified	X	
	Any component fractured or split	X	
	Any sharp edge, projection or sliver	X	
	Wire reinforcement when applicable not used as specified for top and bottom edges of body	X	
Removable top	Not formed as specified		X
Insert retainer	Not formed as specified	X	
Identification marking	Missing, illegible, incomplete, or not as specified		X

4.3.4 *Dimensional examination.* Inspection shall be made of receptacles for compliance with dimensions specified. Any dimension not within specified requirements shall constitute a defect. The inspection level shall be S-2 and the AQL 4.0, expressed in terms of defects per hundred units.

4.3.5 *Examination of preparation for delivery.* An examination shall be made to determine that packaging, packing, and marking as required by section 5 of this specification are complied with. Defects shall be scored as specified in table II. The sample

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

unit shall be one shipping container fully prepared for delivery selected just prior to the closing operation. The lot shall be the number of containers offered for delivery at one time. The inspection level shall be S-2 and the AQL of 4.0, expressed in terms of defects per hundred units.

TABLE II—*Examination of packaging, packing and marking*

Examine	Defect
Markings (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Component missing, damaged, or otherwise defective
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping or tape banding, inadequate stapling, bulging or distortion of containers
Content	Number per container is more or less than required

4.4 **Tests.**

4.4.1 ***Thickness of plating.*** **Plating shall be tested** in accordance with method 521.1 of Fed. Test Method Std. No. 151.

5. PREPARATION FOR DELIVERY

(Fed. Std. No. 102 shall be referred to for definitions and application of the various levels of packaging and packing for civil agency procurement.)

5.1 **Packaging.** Packaging shall be level A, B, or C, as specified (see 6.2 and 6.4).

5.1.1 *Level A or B.* The insert retainer shall be placed in the body of the receptacle and the top shall be put in place. Each complete receptacle shall then be placed upright in a snug-fitting fiberboard box conforming to type I, class 1, style RSC of PPP-B-636. Closure shall be in accordance with the appendix of the box specification.

5.1.2 *Level C.* Receptacles shall be packaged in accordance with the industry's practice.

5.2 **Packing.** Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 *Level A.* Four receptacles, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to class 2, V3c or V3s, style RSC of PPP-B-636. Each shipping container shall be closed, waterproofed by means of tape, and reinforced with flat steel strapping or tape banding in accordance with the appendix of the container specification.

5.2.2 *Level B.* Four receptacles, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to type I or II, class 1, style RSC of PPP-B-636. All flaps of the fiberboard shipping container shall be securely sealed with an adhesive commercially used for the specific product being packed by application throughout the entire area of contact between the flaps or by a combination of metal stitching the bottom flaps and sealing the top flaps with adhesive.

5.2.3 *Level C.* Receptacles, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 **Marking.**

5.3.1 ***Civil agencies.*** In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 *Military requirements.* In addition to any special marking required by the contract or order, interior packages and shipping con-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

tainers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The waste receptacle covered by this specification is for use in military medical areas and laboratories.

6.2 Ordering data. Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(*a*) Title, number and date of this specification.

(*b*) When preproduction sample is required (see 3.1).

(*c*) Selection of the applicable levels of packaging (see 5.1 and 5.2).

6.3 Transportation description. Transportation description and minimum weights applicable to this commodity are:

Rail:

Cans, refuse, other than waste baskets, sheet steel. (Specify nested or not nested).
Carload minimum weights: 14,000, 20,000, and 30,000 pounds, subject to Rule 34, Uniform Freight Classification.

Motor:

Cans, refuse, not otherwise indexed, sheet steel. (Specify nested or not nested).
Truckload minimum weights 10,000 and 16,000 pounds, subject to Rule 115, National Motor Freight Classification.

MILITARY CUSTODIANS:

Army—GL

Navy—MS

Interested activities:

Review

Army—GL MD

Navy—MS

User

Army—MO

Preparing activity:

Army—GL

Reviewer and User information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current Federal Supply Classification Listing of DOD Standardization Documents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.