NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

MIL-PRF-39022/10(EC)
AMENDMENT 5
20 July 1983
SUPERSEDING
AMENDMENT 4
10 January 1983

PERFORMANCE SPECIFICATION

CAPACITORS, FIXED, METALLIZED, PAPER-PLASTIC FILM DIELECTRIC,
DIRECT CURRENT, (HERMETICALLY SEALED IN METAL CASES),
ESTABLISHED RELIABILITY
STYLE CHR10 (INSULATED)

This amendment forms a part of Military Specification Sheet MIL-C-39022/10(EC), dated 26 September 1974, and is approved for use by the Naval Electronic Systems Command, Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 1

* NOTE 1: Delete and substitute:

"1. Number 24 AWG wire (.020 inches ±.002) for case diameters of .175 (4.45 mm) and .195 (4.95 mm).
Number 22 AWG wire (.025 inches ±.002) for case diameters of .235 (5.97 mm) and .312 (7.92 mm).
Number 20 AWG wire (.032 inches ±.002) for case diameter of .400 (10.16 mm) and over (See table I for exceptions.)
Number 18 AWG wire (.040 inches ±.002): See table I."

NOTES: Add new note 8 as follows:

"8. Lead length may be a minimum of one inch long for use in tape and reel packaging, when specified in the ordering data."

PAGE 5

TABLE I: Following page 5, insert 300-volt items as shown on pages 2 and 3 of this amendment.

PAGE 8

TABLE II: Delete and substitute:

" TABLE II. Metric equavilents of decimal inches. 1/

Inches	MM	Inches	MM	Inches	MM
.005	.13	.670	17.02	1.375	34.93
.015	.38	.688	17.48	1.562	39.67
.031	.79	.750	19.05	1.625	41.28
.174	4.42	.812	20.62	1.812	46.02
.193	4.90	.843	21.41	1.875	47.63
.235	5.97	.874	22.20	2.062	52.37
.312	7.92	.937	23.80	2.124	53.95
.400	10.16	.938	23.83	2.312	58.72
.500	12.70	1.000	25.40	2.562	65.07
.531	13.49	1.062	26.97		
.562	14.27	1.125	28.58		
.625	15.88	1.312	33.32		

1/ Metric equivalents (to the nearest .01 millimeter are given for general information only, and are based on 1 inch = 25.4 mm. "

FSC 5910


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:15Z
Check the source to verify that this is the current version before use.

Part number, delete and substitute:

"Part number: M39022/10 (type designation as detailed below)".

Explanation of type designation, delete and substitute:

"Explanation of type designation:

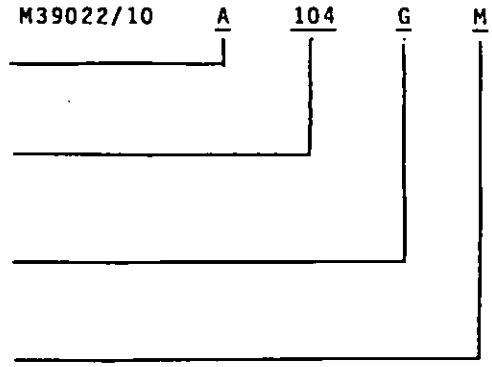

Circuit and voltage code (see Table IV).

Capacitance: Expressed in picofarads. The first two digits are significant figures; the third is the number of zeros to follow.

Capacitance tolerance: K = ±10 percent, J = ±5 percent, G = ±2 percent, F = ±1 percent.

Failure rate level in percent per 1000 hours: M = 1.0 percent, P = 0.1 percent, R = 0.01 percent, S = 0.001 percent."

Following explanation of type designation add:

"Packaging - Capacitors will be furnished in tape and reel packaging when so specified in the ordering data."

TABLE IV, add the following:

Code	Circuit	Voltage
L	1	300
M	3	300

TABLE I. Capacitor characteristics and dimensions - Continued.

DC rated voltage	Cap value (µF)	Dimensions, nominal	
		D +.015, -.005	L ±.031
300	.01	.193	.688
	.012	.235	.688
	.015	.235	.688
	.018	.235	.812
	.022	.235	.812
	.027	.312	.688
	.033	.312	.688
	.039	.312	.812
	.047	.312	.812
	.056	.312	.938
	.068	.312	.938
	.082	.400	.812
	.10	.400	.938
	.12	.400	.938
	.15	.400	1.125

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:15Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics and dimensions - Continued.

DC rated voltage	Cap value (µF)	Dimensions, nominal	
		D +.015, -.005	L ±.031
300	.18	.400	1.312
"	.22	.400	1.312
"	.27	.562	1.125
"	.33	.562	1.125
"	.39	.562	1.125
"	.47	.562	1.562
"	.56	.562	1.562
"	.68	.670	1.312
"	.82	.670	1.562
"	1.0	.670	1.812
"	1.2	.670	1.812
"	1.5	.750	2.062
"	1.8	.750	2.062
"	2.0	.750	2.312
"	2.2	1.000	1.812
"	2.5	1.000	1.812
"	2.7	1.000	1.812
"	3.0	1.000	2.062
"	3.3	1.000	2.312
"	3.9	1.000	2.562

See footnotes at end of table."

NOTE: The margin of this amendment is marked with an asterisk to indicate where changes from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notation and relationship to the last previous amendment.

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5910-N389)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:15Z
Check the source to verify that this is the current version before use.